


DATE

REVISIONS

REV

DRAWING NUMBER  
SSF-LXH2100XX(-01)

REV

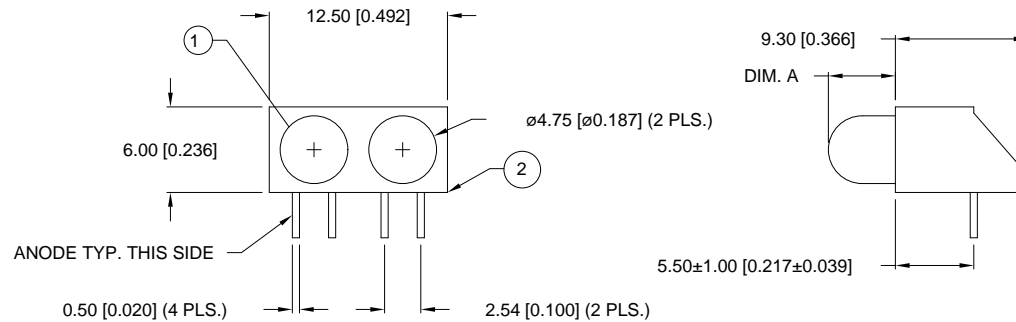

DIM. A

NO P/N SUFFIX: 3.2 ± .05 (.126 ± .02)  
WITH -01 SUFFIX: 4.7 ± .05 (.187 ± .02)

## NOTES:

- NO P/N SUFFIX, POS. 1 SSL-LX507F3XX  
POS. 2 SSL-LX507F3XX  
WITH -01 SUFFIX, POS. 1 SSL-LX509F3XX  
POS. 2 SSL-LX509F3XX
- SSH-LXH2100 BLACK HOLDER.

UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±.25mm (±0.010")

## RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

**LUMEX**  
INCORPORATED

290 E. HELLEN ROAD  
PALATINE, ILLINOIS 60067  
(847) 359-2790

## CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INCORPORATED. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INCORPORATED, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	DWN:	CHK'D:	APPD:
SCALE:	N/A		

T-5mm (T-1 3/4) LED RIGHT ANGLE FAULT INDICATOR,  
'X' COLOR, 'X' DIFFUSED LENS.

PAGE 1 OF 1

DRAWING NUMBER  
SSF-LXH2100XX(-01)

REV