

GM5WA06200Z

Chip LED

Built-in 3-chip, Super-luminosity Chip LED

Features


- (1) Super-luminosity chip LED
- (2) Built-in Blue, Green, Red LED chip
- (3) Using a package with high heat dissipation properties, it can be driven with a large current ($I_F=40$ mA)
- (4) Reduction of power consumption and adjusting each color is possible thanks to serial connection by 6 terminal connection (Individual driving by each terminal) in case of using several number of LED
- (5) Wide viewing angle (2θ 1/2): 120°
- (6) External dimensions: $6.0 \times 5.0 \times 2.3$ mm
- (7) Lead frame package with individual 6 pin

Applications

- (1) Amusement equipment
- (2) Information boards

Outline Dimensions

(Unit:mm)

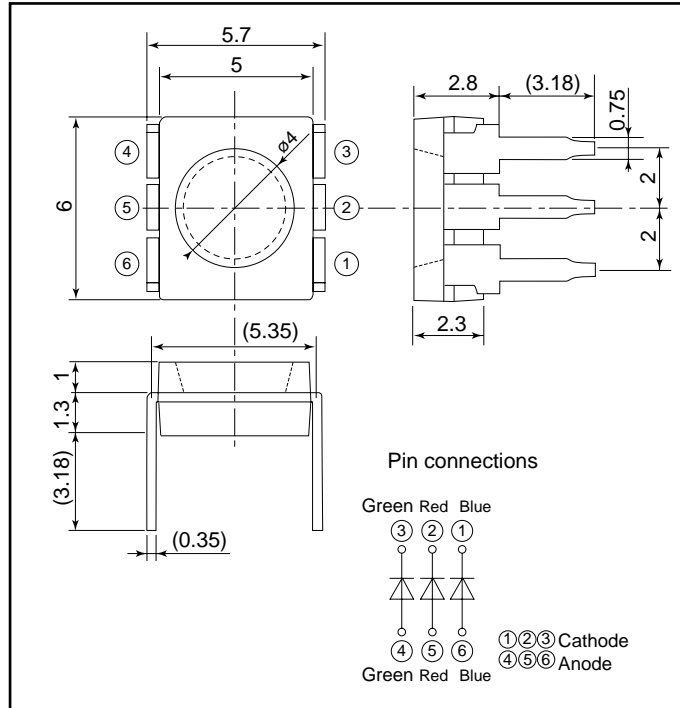

Absolute Maximum Ratings

($T_a=25^\circ\text{C}$)

Model No.	Radiation color	Radiation material	Power dissipation P^{*1} (mW)	Forward current I_F (mA)	Peak forward current I_{FM}^{*2} (mA)	Derating factor (mA/°C)		Reverse voltage V_R (V)	Operating temperature T_{opr} (°C)	Storage temperature T_{sig} (°C)	Soldering temperature T_{sol}^{*3} (°C)
						DC	Pulse				
GM5WA06200Z	Blue	InGaN	400	50	80	0.66	1.06	5	-30 to +85	-40 to +100	295
	Green	InGaN		50	80	0.66	1.06	5	-30 to +85	-40 to +100	295
	Red	AlGaInP		50	80	0.66	1.06	5	-30 to +85	-40 to +100	295

*1 Within 400 mW at all chips are lightened.

*2 Duty ratio=1/10, Pulse width=0.1ms.

*3 For 3s or less at the temperature of hand soldering.

Electro-optical Characteristics

($I_F=40$ mA, $T_a=25^\circ\text{C}$)

Lens type	Model No.	Radiation color	Forward voltage V_F (V) TYP	Peak emission wavelength λ_p (nm) TYP	Dominant wavelength λ_d (nm) TYP	Luminous intensity I_v (mcd) TYP	Spectrum radiation bandwidth $\Delta\lambda$ (nm) TYP	Reverse current	
								I_R (μA) MAX	V_R (V)
Colorless transparency	GM5WA06200Z	Blue	4.5	466	469	(150)	(26)	100	4
		Green	4.5	519	520	(500)	(35)	100	4
		Red	2.0	639	631	(300)	(18)	100	4

(Notice)

•In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

•Specifications are subject to change without notice for improvement.

(Internet)

•Data for Sharp's optoelectronic is provided on internet. (Address <http://sharp-world.com/ecg/>)

As of April 2001

NOTICE

The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.

Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.

Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:

(i) The devices in this publication are designed for use in general electronic equipment designs such as:

- Personal computers
- Office automation equipment
- Telecommunication equipment [terminal]
- Test and measurement equipment
- Industrial control
- Audio visual equipment
- Consumer electronics

(ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:

- Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
- Traffic signals
- Gas leakage sensor breakers
- Alarm equipment
- Various safety devices, etc.

(iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:

- Space applications
- Telecommunication equipment [trunk lines]
- Nuclear power control equipment
- Medical and other life support equipment (e.g., scuba).

Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.

If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.

This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.

Contact and consult with a SHARP representative if there are any questions about the contents of this publication.