


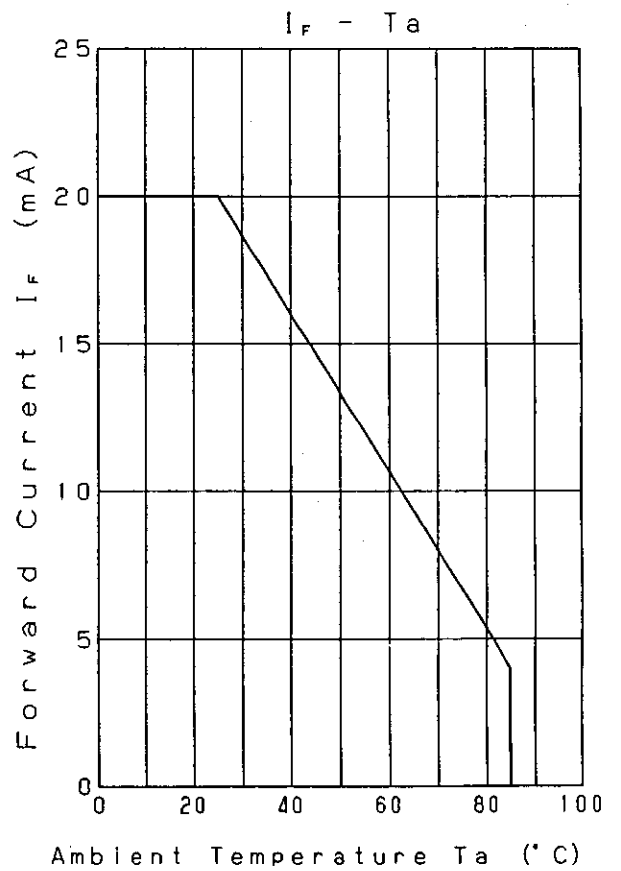
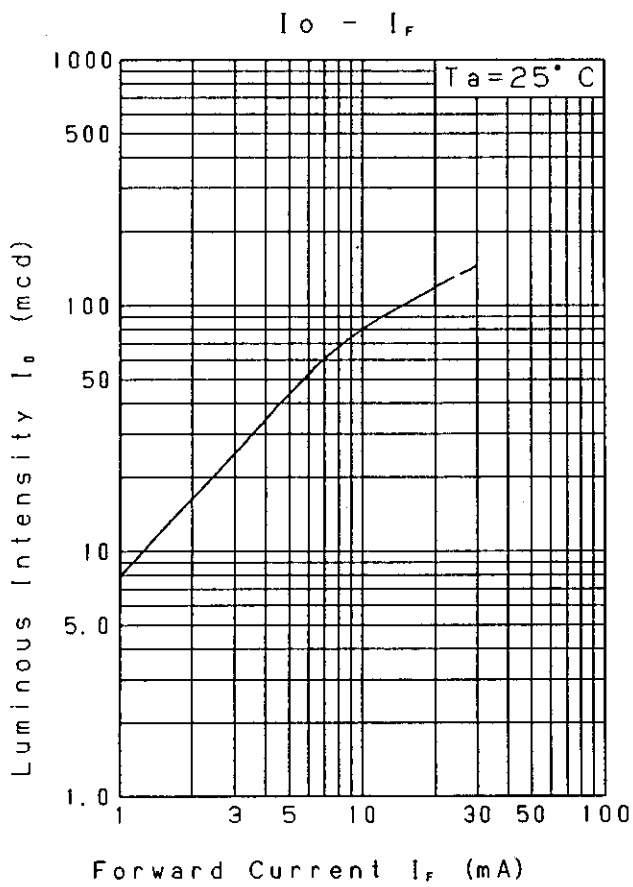
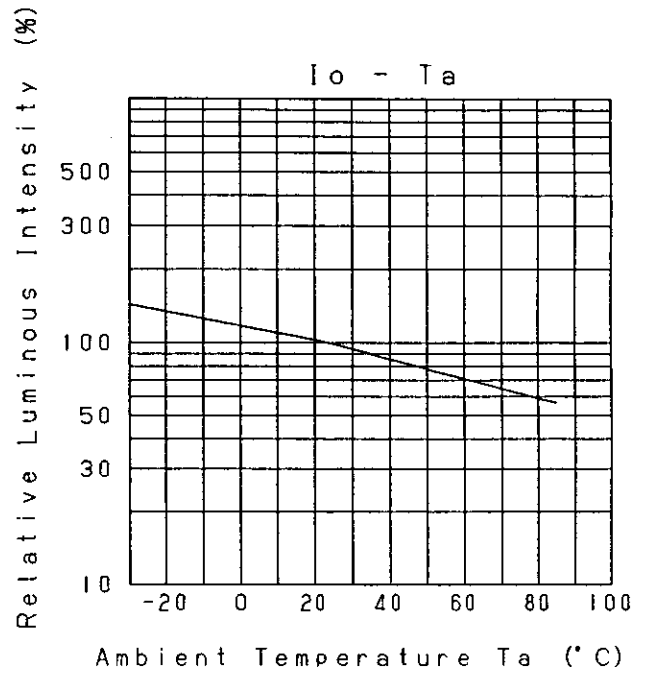


Approved	Checked	Designed	DEVELOPMENT SPECIFICATION						
		<i>T. Takata</i>	P/N: LNJ818C83RA1				TEMPORARY		
T	Y	P	E	Orange Light Emitting Diode					
APPLICATION				Indicators					
MATERIAL				InGaAlP					
OUTLINE				Attached					
ABSOLUTE MAXIMUM RATINGS				P	*1 I _{FP}	I _{FDC}	V _R	Topr	Tstg
				55	60	20	4	-30~+85	-40~+100
				mW	mA	mA	V	°C	°C
CONDITION				Ta=25±3°C					
Test Specification									
I t e m	Symbol	C o n d i t i o n	Typ	Limit		Unit			
				Min	Max				
Forward Voltage	V _F	I _F =10mA	2.03		2.5	V			
Reverse Leakage Current	I _R	V _R = 4V			100	μA			
Luminous Intensity *2	I _O	I _F =10mA DC	80	42		mc			
Peak Emission Wavelength	λ _p	I _F =10mA DC	630			nm			
Spectral Line Half Width	Δλ	I _F =10mA DC	15			nm			
<p>*1. The Condition of I_{FP} is duty 10% . Pulse width 1 ms</p> <p>*2. Tolerance of luminous intensity: ±20%.</p> <p>NOTE</p> <p>★1. Please contact the Panasonic local office if you design at low current (below 1mA DC) or pulse current operation and have any questions.</p> <p>★2. Soldering conditions...Refer to Handling note.</p> <p>★3. Compositions of the lead ... Cu/Ni/Au plating</p> <p>★4. Beware of destruction by static electricity in handling the LED.</p> <p>★5. Circuit to operate LED.</p>									
					(A) Recommended circuit.				
					(B) The difference of brightness between the LED could be found due to the V _F characteristics of each LED.				
Nov. 7. 2001									


Approved	Checked	Designed	DEVELOPMENT SPECIFICATION	TEMPORARY
		T. Tabata		

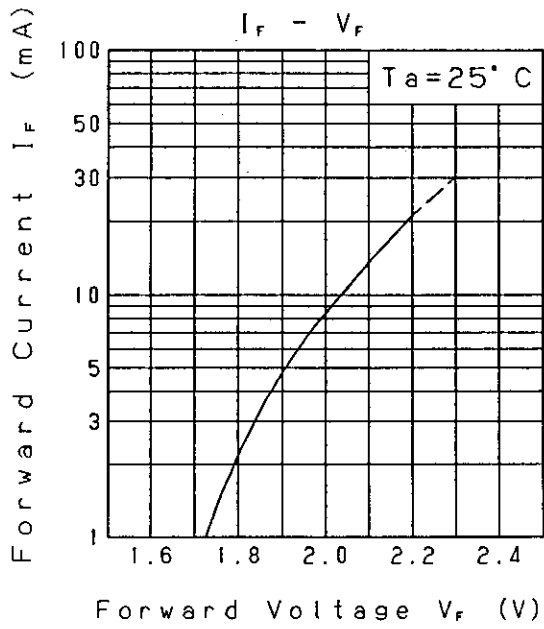


Nov.7.2001			
------------	--	--	--

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION	TEMPORARY
		T. Tabata		

Relative Luminous Intensity
Wavelength Characteristics

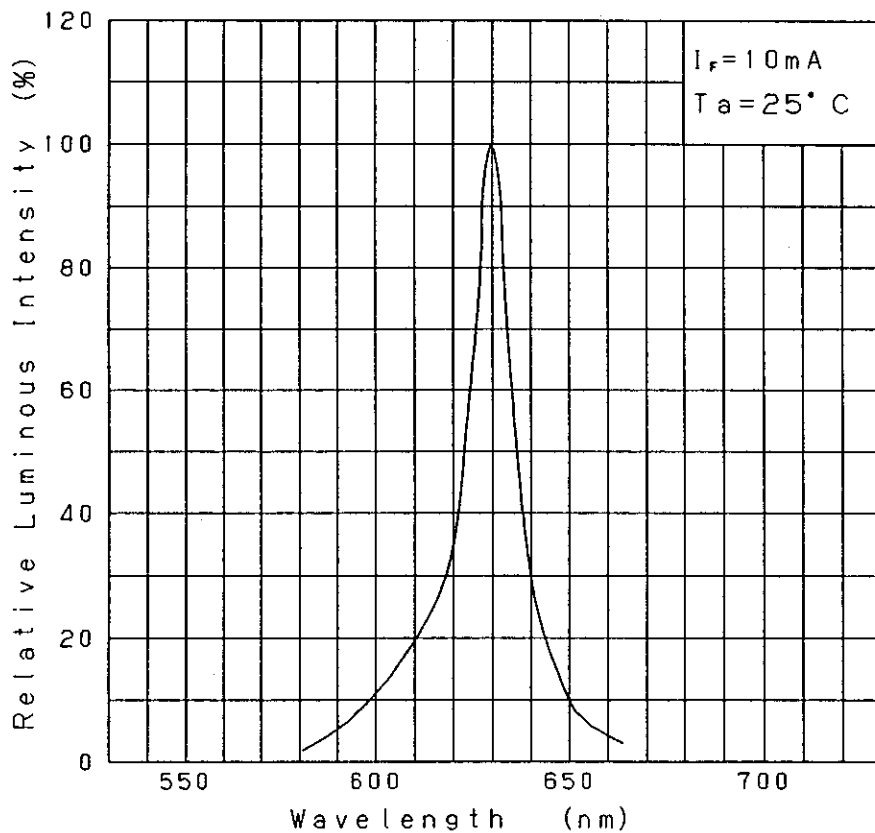




Directive Characteristics

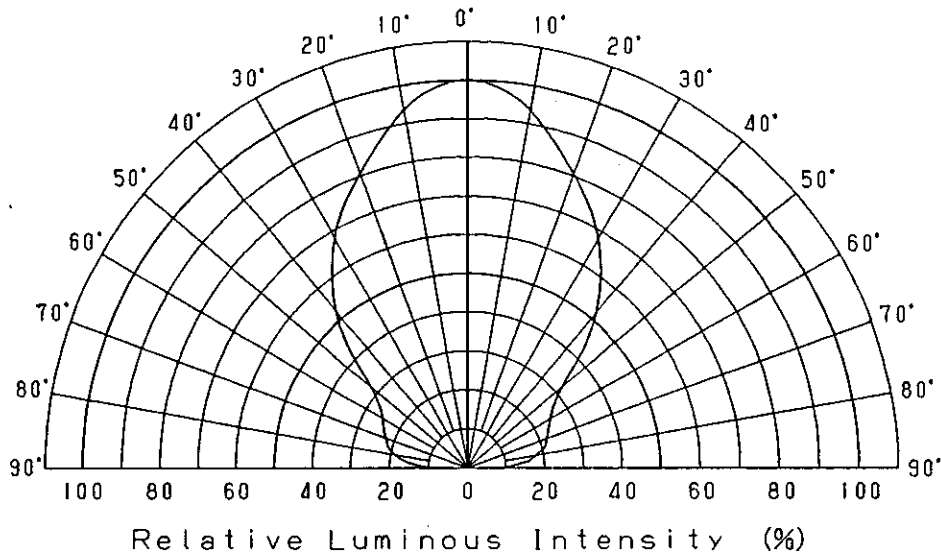


Nov. 7. 2001			

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION (OUTLINE)	TEMPORARY
		T. Tabata		


Outline

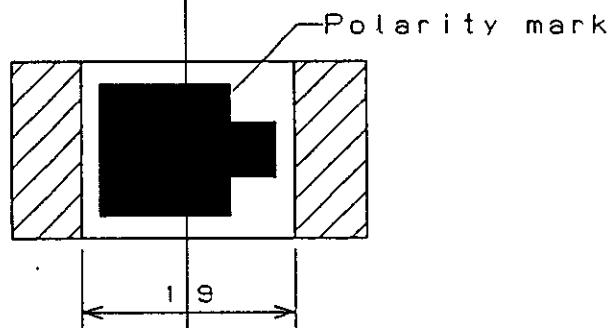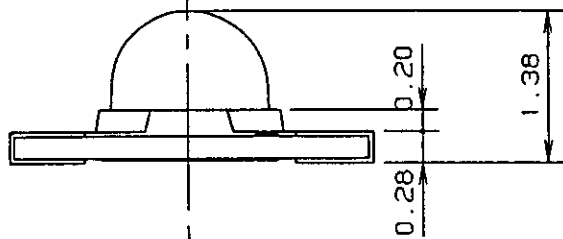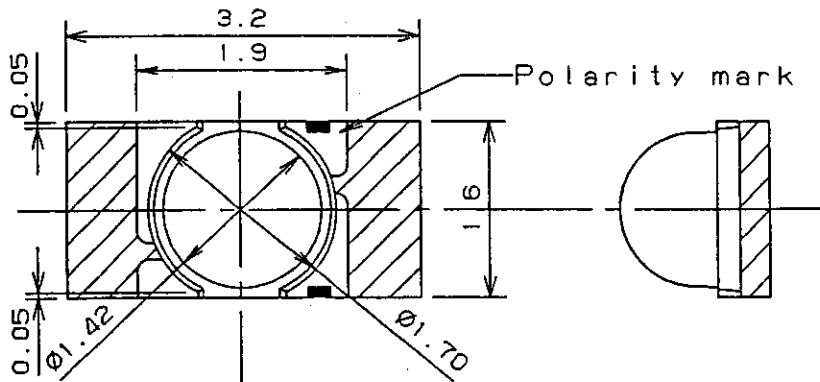

Recommended Land Layout

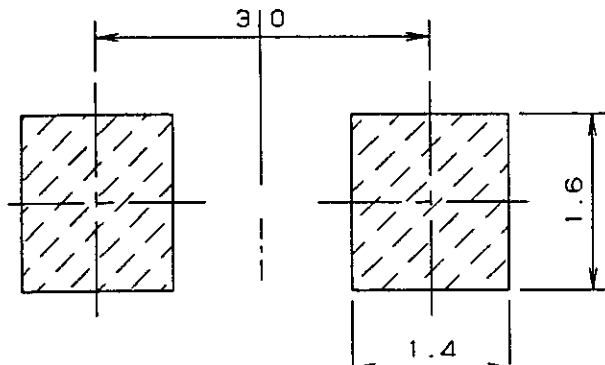

Polarity



(NOTE)

1. Unit: mm
2. Tolerance unless specified is ± 0.15 .
3. indicate Au terminal.

Nov. 7. 2001			
--------------	--	--	--