


T-1 3/4 Midget Groove Base

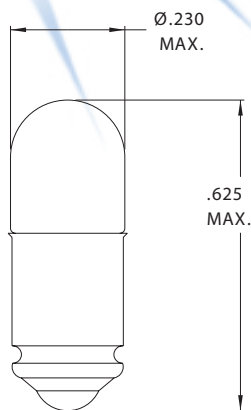

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM698 | 1.35 | .060 | .010 | 500 | C-6 |
| CM266 | 2.50 | .350 | .210 | 10,000 | C-2R |
| CM8699 | 2.50 | .200 | .220 | 500 | C-2R |
| CM8704 | 2.70 | .060 | .040 | 6,000 | C-2R |
| CM390 | 3.00 | .015 | .004 | 10,000 | C-6 |
| CM8849 | 3.00 | .350 | .300 | 10,000 | C-2R |
| CM7345 | 4.50 | .120 | .050 | 25,000 | C-2R |
| CM3152 | 5.00 | .060 | .150 | 5,000 | C-2R |
| CM7346 | 5.00 | .060 | .030 | 60,000 | C-2R |
| CM7347 | 5.00 | .060 | .050 | 25,000 | C-2R |
| CM7348 | 5.00 | .115 | .150 | 40,000 | C-2R |
| CM7350 | 5.00 | .190 | .450 | 1,000 | C-2R |
| CM337 | 6.00 | .200 | .600 | 1,000 | C-2R |
| CM8705 | 6.00 | .040 | .030 | 10,000 | C-2R |
| CM8706 | 6.00 | .200 | .100 | 50,000 | C-2F |
| CM379 | 6.30 | .200 | .400 | 20,000 | C-2F |
| CM398 | 6.30 | .200 | .550 | 5,000 | C-2R |
| CM7351 | 6.30 | .040 | .020 | 2,000 | C-2V |
| CM7352 | 6.30 | .150 | .450 | 3,000 | C-2R |
| CM8708 | 6.30 | .070 | .230 | 1,000 | C-2R |
| CM397 | 10.0 | .040 | .080 | 5,000 | C-2F |
| CM709 | 10.0 | .140 | .002 | 50,000 | C-2F |
| CM7353 | 11.0 | .022 | .030 | 10,000 | C-2F |
| CM7354 | 12.0 | .040 | .120 | 10,000 | C-2F |
| CM336 | 14.0 | .080 | .500 | 1,500 | C-2F |
| CM386 | 14.0 | .080 | .300 | 15,000 | C-2F |
| CM393 | 14.0 | .100 | .500 | 10,000 | C-2F |
| CM346 | 18.0 | .040 | .150 | 10,000 | C-2F |
| CM457 | 22.0 | .040 | .300 | 2,000 | C-2F |
| CM8177 | 24.0 | .050 | .500 | 1,000 | C-2F |
| CM2350 | 28.0 | .050 | .700 | 1,000 | C-2F |
| CM276 | 28.0 | .060 | .340 | 25,000 | C-2F |
| CM334 | 28.0 | .040 | .340 | 4,000 | C-2F |
| CM388 | 28.0 | .040 | .300 | 7,000 | C-2F |
| CM6035 | 28.0 | .024 | .150 | 4,000 | CC-2F |
| CM7355 | 28.0 | .040 | .150 | 10,000 | C-2F |
| CM7356 | 28.0 | .065 | .650 | 5,000 | C-2F |
| CM2250 | 48.0 | .025 | .200 | 5,000 | C-2F |