

Vertical Cavity Surface Emitting Laser

OPV300, OPV310, OPV310Y,
OPV314, OPV314Y



Features:

- 850nm VCSEL Technology
- Data rates up to 2.5 Gbps
- High thermal stability
- Low drive current / high output density
- Narrow and concentric beam angle
- Recommended for multimode fiber applications
- Burned in for communication level reliability



Description:

The **OPV300 / OPV310 / OPV314** series are high performance 850nm Vertical Cavity Surface Emitting Laser (VCSEL). The **OPV300** and **OPV310** are designed to be utilized for sensing applications as well as air transmission of data. The **OPV314** is designed for high speed communication links. The **OPV310 / OPV314** combine all the performance advantages of a VCSEL with the addition of a power monitor diode for precise control of optical power. The **OPV310 and OPV314** have a back monitor photodiode used for optical power management or optical reception for data communication applications.

The **OPV300 / OPV310** have a flat lens while the **OPV314** has a microbead lens. Refer to mechanical drawings for details.

The high performance 850nm VCSEL is designed for applications where low current is required with high on-axis optical power. These product's combine features including high speed, high output optical power and concentric beam making it an ideal transmitter for integration into all types of data communications equipment as well as for reflective and transmissive switches.

Applications:

- Fiber Channel
- Gigabit Ethernet
- ATM
- VSR
- Intra-System links
- Optical backplane interconnects
- Reflective sensing
- Interruptive sensing
- Long distance spot illumination

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Operating Temperature Range	0°C to +70°C
Storage Temperature Range	-40°C to +100°C
Maximum Forward Peak Current	15 mA
Maximum Reverse Voltage	10 V
Max. Continuous Optical Power at 70° C	1.1 mW
Lead Soldering Temperature	260°C for 10 sec.

Notes:

- (1) Threshold Current is based on the two line intersection method specified in Telcordia GR-468-Core. Line 1 from 4 mA to 6 mA. Line 2 from 0 mA to 0.5 mA.
- (2) Series Resistance is the slope of the Voltage-Current line from 5 to 8 mA.
- (3) Slope efficiency is the slope of the best fit LI line from 5 mA to 8 mA using no larger than .25 mA test interval points.
- (4) Using data points taken for slope efficiency above, delta L/delta I shall be calculated for each adjacent pair of points.



RoHS



Additional laser safety information can be found on the Optek website. See application bulletin #221. Classification is not marked on the device due to space limitations. See package outline for center-line of optical radiance. Operating devices beyond maximum rating may result in hazardous radiation exposure.

Vertical Cavity Surface Emitting Laser

OPV300, OPV310, OPV310Y,
OPV314, OPV314Y



Electrical/Optical Characteristics (T_A = 25°C unless otherwise noted)

Symbol	Parameter	Min	Typ	Max	Units	Test Conditions
P _{OT}	Total Power Out OPV300 / OPB310 OPV314	1.50 1.40			mW	I _F = 7 mA
I _{TH}	Threshold Current	0.80		3.00	mA	Note 1
V _F	Forward Voltage	1.60		2.20	V	I _F = 7 mA
I _R	Reverse Current			35	nA	V _R = 5 V
R _S	Series Resistance	20		55	ohms	Note 2
η	Slope Efficiency	0.28		0.60	mW/mA	Note 3
	Linearity	0.00				Note 4
λ	Wavelength	840	850	860	nm	
Δλ	Optical Bandwidth			0.85	nm	
θ	Beam Divergence (OPV300 / OPV310 only)		24		Degree	I _F = 7 mA
t _r /t _f	Rise and Fall Time		100		ps	20% to 80%
N _{RI}	Relative Intensity Noise		-123		Db/Hz	
ΔI _{TH} /ΔT	Temp Coefficient of Threshold Current		±1.0		mA	0° - 70° C, Note 1
Δλ/ΔT	Temp Coefficient of Wavelength		0.06		%/°C	0° - 70° C, I _F = 7 mA
ΔV _F /ΔT	Temperature Coefficient for VF		-2.5		mV/°C	0° - 70° C, I _F = 7 mA
Δη/ΔT	Temperature Coefficient for Efficiency		-0.5		%/°C	0° - 70° C, Note 3
Photodiode Electrical Characteristics (OPV310/OPV314 series)						
I _{RPD}	Reverse Current, photodiode			30	nA	V _R = 5 V
I _{M1}	Monitor Current OPV310 OPV314	30 40			μA	I _F = 7 mA, V _R = 5 V
I _{M2}	Monitor Current OPV310 OPV314	40 45			μA	P _O = 2 mW, V _R = 5 V

NOTES:


- (1) Threshold Current is based on the two line intersection method specified in Telcordia GR-468-Core. Line 1 from 4 mA to 6 mA. Line 2 from 0 mA to 0.5 mA.
- (2) Series Resistance is the slope of the Voltage-Current line from 5 to 8 mA.
- (3) Slope efficiency, is the slope of the best fit LI line from 5 mA to 8 mA using no larger than .25 mA test interval points.
- (4) Using data points taken for slope efficiency above, delta L/delta I shall be calculated for each adjacent pair of points.
- (5) ESD Class 1

Vertical Cavity Surface Emitting Laser





OPV300, OPV310, OPV310Y,
OPV314, OPV314Y



Normalized Output Power vs. Forward Current

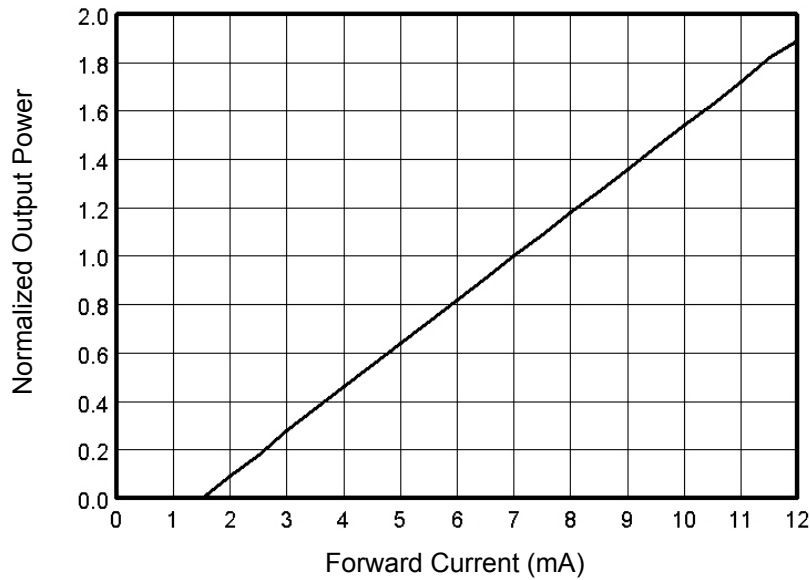

OPV300 & OPV310

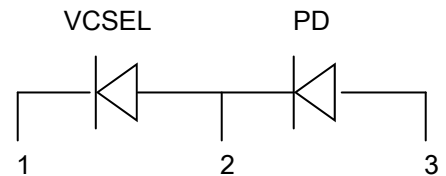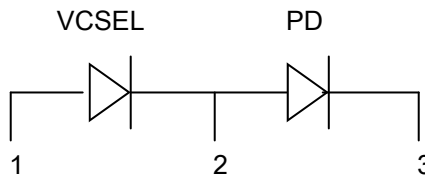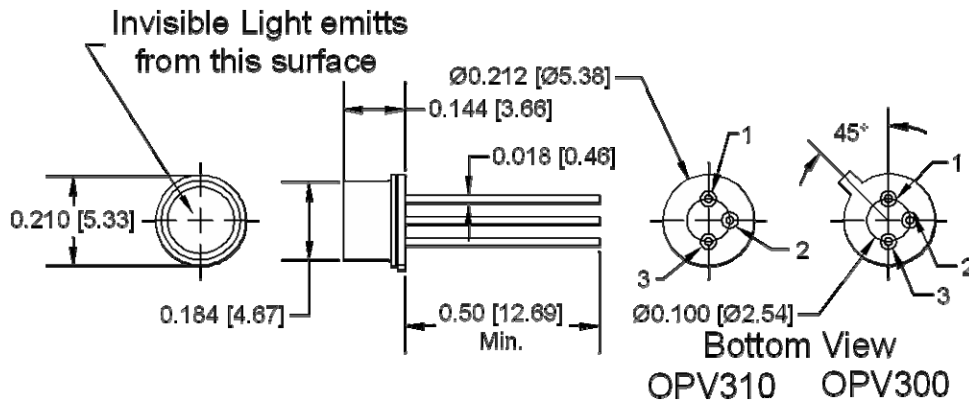

OPV300	
Pin	Connection
1	VCSEL Anode
2	VCSEL Cathode
3	No Connection

OPV310	
Pin	Connection
1	VCSEL Anode
2	VCSEL Cathode/PD Anode
3	PD Cathode

OPV310Y	
Pin	Connection
1	VCSEL Cathode
2	VCSEL Anode/PD Cathode
3	PD Anode


Vertical Cavity Surface Emitting Laser

OPV300, OPV310, OPV310Y,
OPV314, OPV314Y





OPV314

Invisible Light emits
from this surface

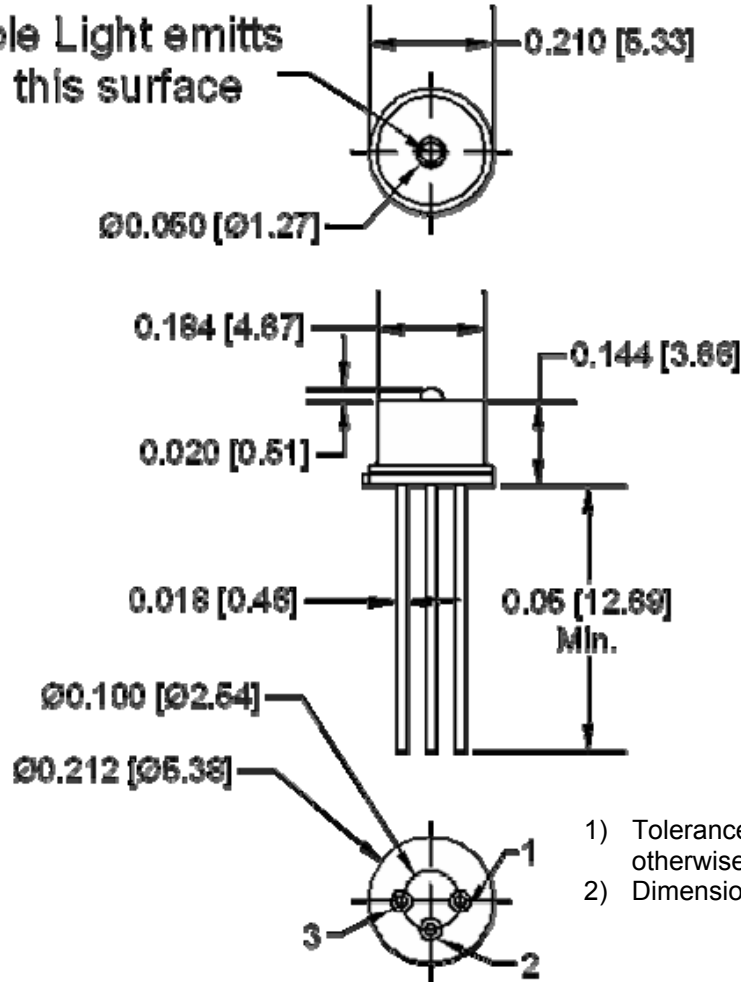

- 1) Tolerances are ± 0.005 unless otherwise specified
- 2) Dimensions in inches [mm]

Bottom View

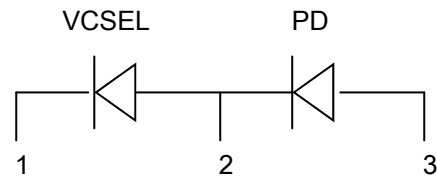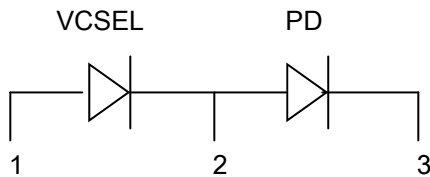

OPV314	
Pin	Connection
1	VCSEL Anode
2	VCSEL Cathode/PD Anode
3	PD Cathode

OPV314Y	
Pin	Connection
1	VCSEL Cathode
2	VCSEL Anode/PD Cathode
3	PD Anode

