UNCONTROLLED DOCUMENT

PART NUMBER

LPI-C011701S-150G


A


REV.

	REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
١	Α	E.C.N. #11148.	01.24.07


PANEL CUT OUT: \$6.00mm.

PANEL THICKNESS: 1.80mm ~ 4.80mm.

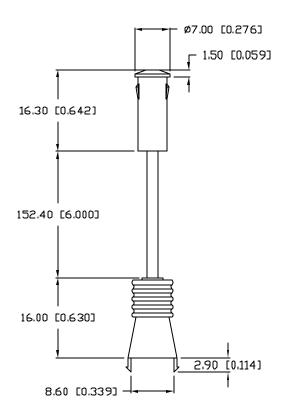

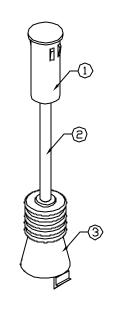

RECOMMENDED PCB CUT OUT

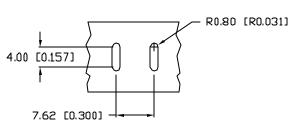

NOTES:

- 1. LXP-LXNOD1701C.
- 2. LXP-LPI011701-170.
- 3. LXP-H011701.
- 4. RECOMMENDED LED: SSL-LX3054XX.

(Pb)

9.18.02

*UNLESS DTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.5 (±0.020), XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MN = +DECINAL PRECISION MAX. = +0.00 -DECINAL PRECISION MAX.

REV.

PART NUMBER
LPI-C011701S-150G

SINGLE UNIT PANEL MOUNT FLEXIBLE LIGHT TRANSPORTER, GREEN LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF

LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WISTING BY LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WISTING BY LUMEX INC. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTINENT OF THE SPECIFICAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCULSIVE AND DISSEMINATION TO ALL THIRD PARTIES.

reliability note

Our many years of experience data accumulation indicate that scuder heat is a major cause of early and future failure. Please pay attention to your soldering process.



JC

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE:

UNCONTROLLED

PAGE: 1 OF 1 SCALE: N/A