

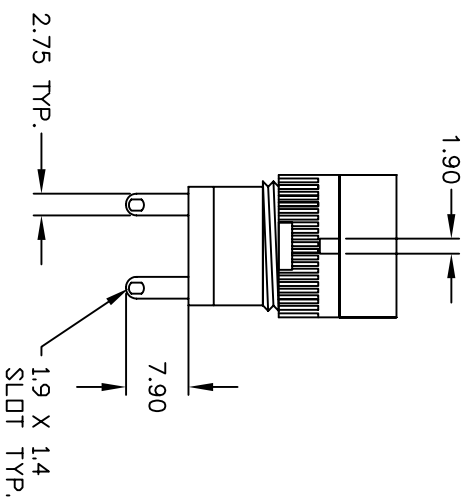
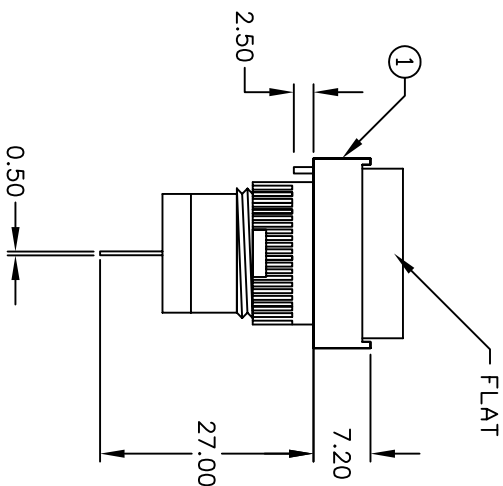


RECOMMENDED PANEL MOUNTING
SCALE 1:1

a-L-b (+)

CIRCUIT: PILOT INDICATOR

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. RATINGS: 1A, 2A, 4A, 5A @250V AC
24V DC LED
 4. CONTACT MATERIAL: COPPER ALLOY W/Silver Plating

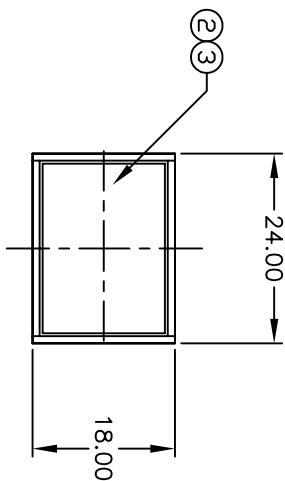

PARTS LIST			
ITEM	QTY.	PART NO.	PART DESCRIPTION
1	1	F040001	L16 PL T1 00
2	1	F050423	50-004-23 (RED LED)
3	1	F050214	50-002-14 (RED lens)

E-SWITCH®

L16 PL T10 K RED RED
TRANSPARENT/FLAT LENS

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
B	15604	EDIT LED VOLTAGE	12/14/05	PH
A	11561	RELEASE FOR PRODUCTION	2/27/03	CJB

TITLE	SCALE	DATE	DR	DWG	REV
L16 PL T10 K RED RED TRANSPARENT/FLAT LENS	1:1	2/27/03	CJB	XF0062P	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED