



### Cross Section

Top Film	.....	0.18 mm [0.007"]
Spacer	.....	0.08 mm [0.003"]
Glass	.....	2.36 mm [0.093"]
Panel Thickness	..	2.62 mm [0.103"]



### Tail Connection

Strain Relief	.....	0.13 mm [0.005"]
Tail	.....	0.25 mm [0.010"]
Strain Relief	.....	0.13 mm [0.005"]

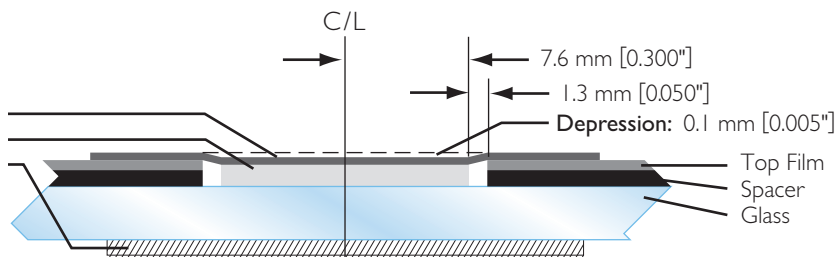

### Pin-Out

- Pin 1: Upper-Left
- Pin 2: Upper-Right
- Pin 3: Sense
- Pin 4: Lower-Right
- Pin 5: Lower-Left

### Materials

- Glass Backer: ITO Coated  
Soda Lime Glass
- Top Film: Diffused
- Connector: AMP 487406-4 Pins  
AMP 487378-4 Housing
- Tail: Silver on Polyester

### Tolerances

- Sensor: ± 0.4 mm [0.015"] from datum corner
- Tail Length: ± 2.5 mm [0.100"]
- Total Panel Thickness: ± 10%