



Cross Section

Top Film	0.18 mm [0.007"]
Spacer	0.08 mm [0.003"]
Glass	1.60 mm [0.063"]
Panel Thickness	..	1.86 mm [0.073"]



Tail Connection

Strain Relief	0.13 mm [0.005"]
Tail	0.25 mm [0.010"]
Strain Relief	0.13 mm [0.005"]

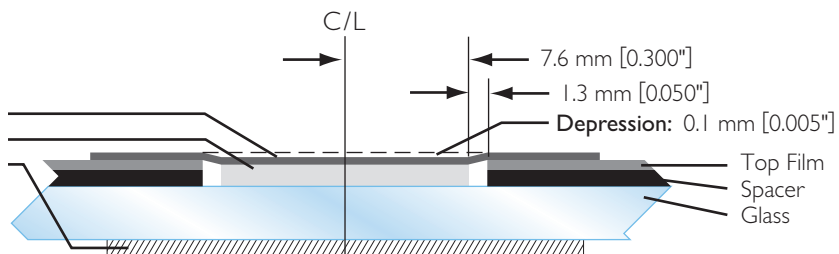

Pin-Out

- Pin 1: Upper-Right
- Pin 2: Upper-Left
- Pin 3: Sense
- Pin 4: Lower-Left
- Pin 5: Lower-Right

Materials

- Glass Backer: ITO Coated Chemically Strengthened Glass
- Top Film: Enhanced
- Connector: AMP 487117-5 Pins
AMP 487378-4 Housing
- Tail: Silver on Polyester

Tolerances

- Sensor: ± 0.4 mm [0.015"] from datum corner
- Tail Length: ± 2.5 mm [0.100"]
- Total Panel Thickness: $\pm 10\%$