


REV	INITIALS	DATE	DESCRIPTION

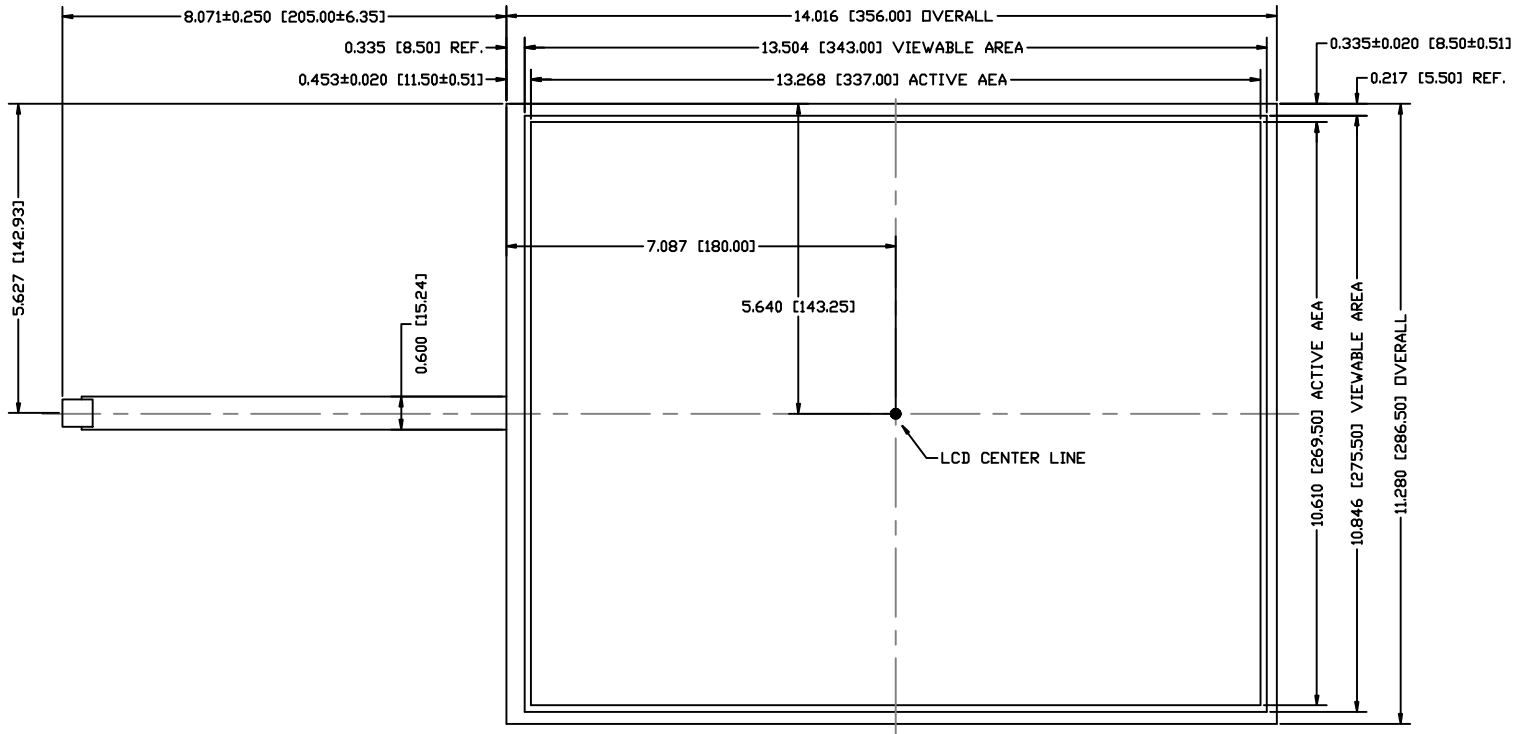

NOTES:

1. TOLERANCE ± 0.015 UNLESS NOTED OTHERWISE.
2. TOP CONDUCTIVE LAYER TO BE 0.007" THICK POLYESTER WITH AN ANTI-GLARE SCRATCH RESISTANT COATING.
3. PIN ONE LOCATION IS THE UPPER MOST PIN WHEN VIEWING SCREEN WITH CABLE TO THE LEFT.
4. PINOUT TO BE AS INDICATED.
 - PIN 1 - UPPER RIGHT.
 - PIN 2 - LOWER RIGHT.
 - PIN 3 - SENSE.
 - PIN 4 - UPPER LEFT.
 - PIN 5 - LOWER LEFT.
5. FLEX TAIL IS TERMINATED USING AMP RECEPTACLE PIN 2-487406-4 WITH HOUSING 487378-4 OR EQUIVALENTS.
6. GLASS SUBSTRATE TO BE .074" THICK GLASS.
7. NOMINAL PANEL THICKNESS IS .087" ± 0.008 .

BERGQUIST TOUCH PRODUCTS

301 WASHINGTON STREET
CANNON FALLS, MN 55009

TITLE: 17" DIAGONAL 5 WIRE TOUCHSCREEN			
DRN: MLR	DATE: 9/27/07	SCALE: 1:1	TOL: ± 0.015
CHKD:	DATE:	PART NUMBER:	DWG REV
APVD:	DATE:	400387	