
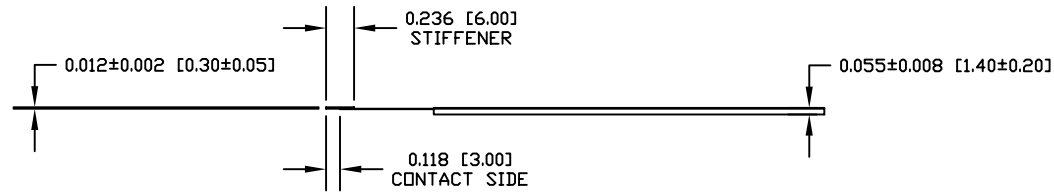


REV	INITIALS	DATE	DESCRIPTION

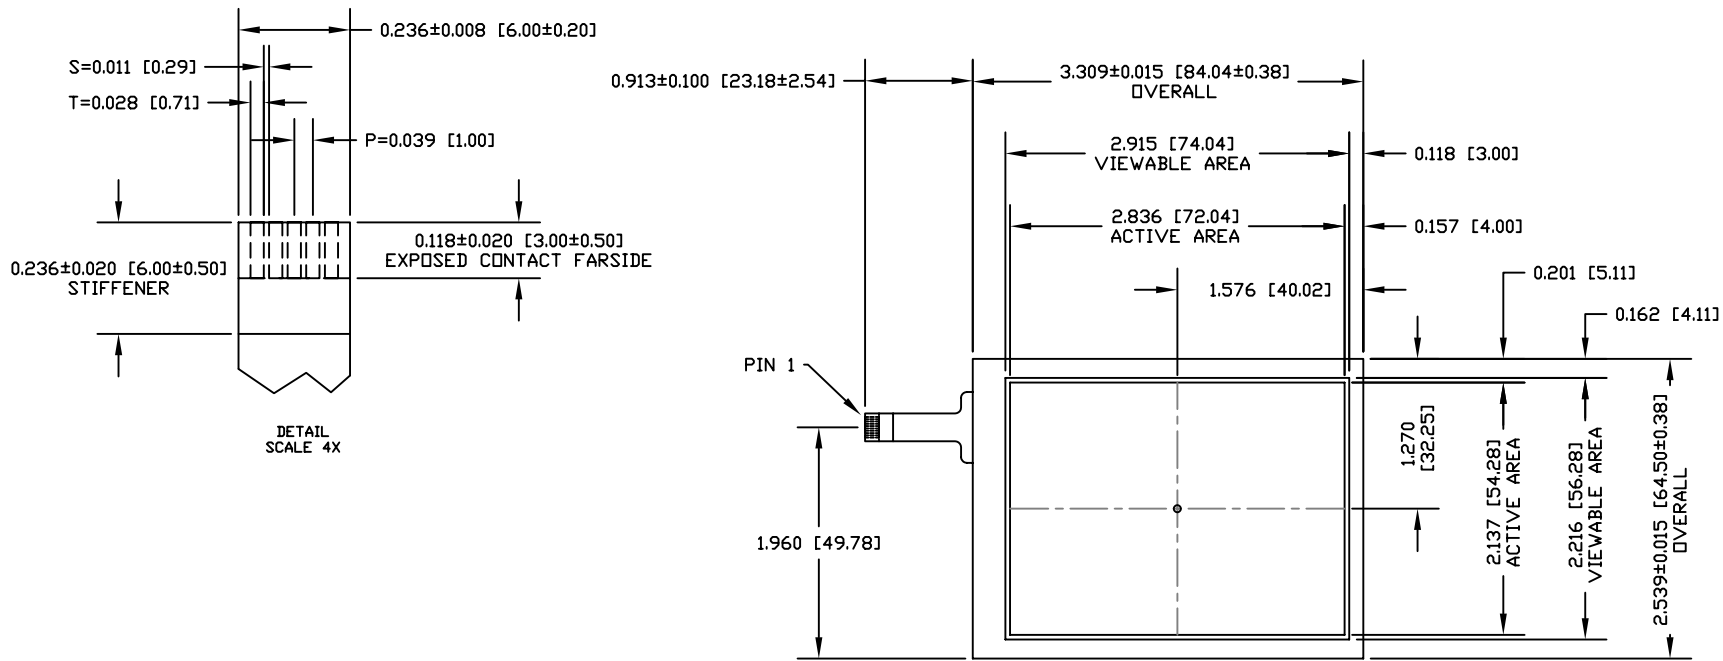

NOTES:

1. TOLERANCE  $\pm 0.015$  UNLESS NOTED OTHERWISE.
2. TOP CONDUCTIVE LAYER TO BE 0.007" THICK POLYESTER WITH A DIFFUSED SCRATCH RESISTANT COATING.
3. PIN ONE LOCATION IS THE RIGHT PIN WHEN VIEWING SCREEN WITH CABLE TO THE LEFT.
4. PINOUT TO BE AS INDICATED.  
PIN 1 - UPPER RIGHT.  
PIN 2 - UPPER LEFT.  
PIN 3 - SENSE.  
PIN 4 - LOWER LEFT.  
PIN 5 - LOWER RIGHT.
7. FPC TAIL CONSTRUCTION IS KAPTON OVER 0.5 OZ Cu TRACES.
8. TAIL CONTACT END TO MATE WITH ZIF TYPE CONNECTOR.
9. NOMINAL GLASS THICKNESS IS .043 CHEMICALLY STRENGTHENED.

BERGQUIST TOUCH PRODUCTS			
301 WASHINGTON STREET, CANNON FALLS, MN 55609			
TITLE: 3.5" DIAGONAL 5 WIRE TOUCHSCREEN			
DRN: MLR	DATE: 2/1/08	SCALE: 1:1	TOL: $\pm 0.015$
CHKD:	DATE:	PART NUMBER:	REV
APVD:	DATE:	400333	