



REV	INITIALS	DATE	DESCRIPTION

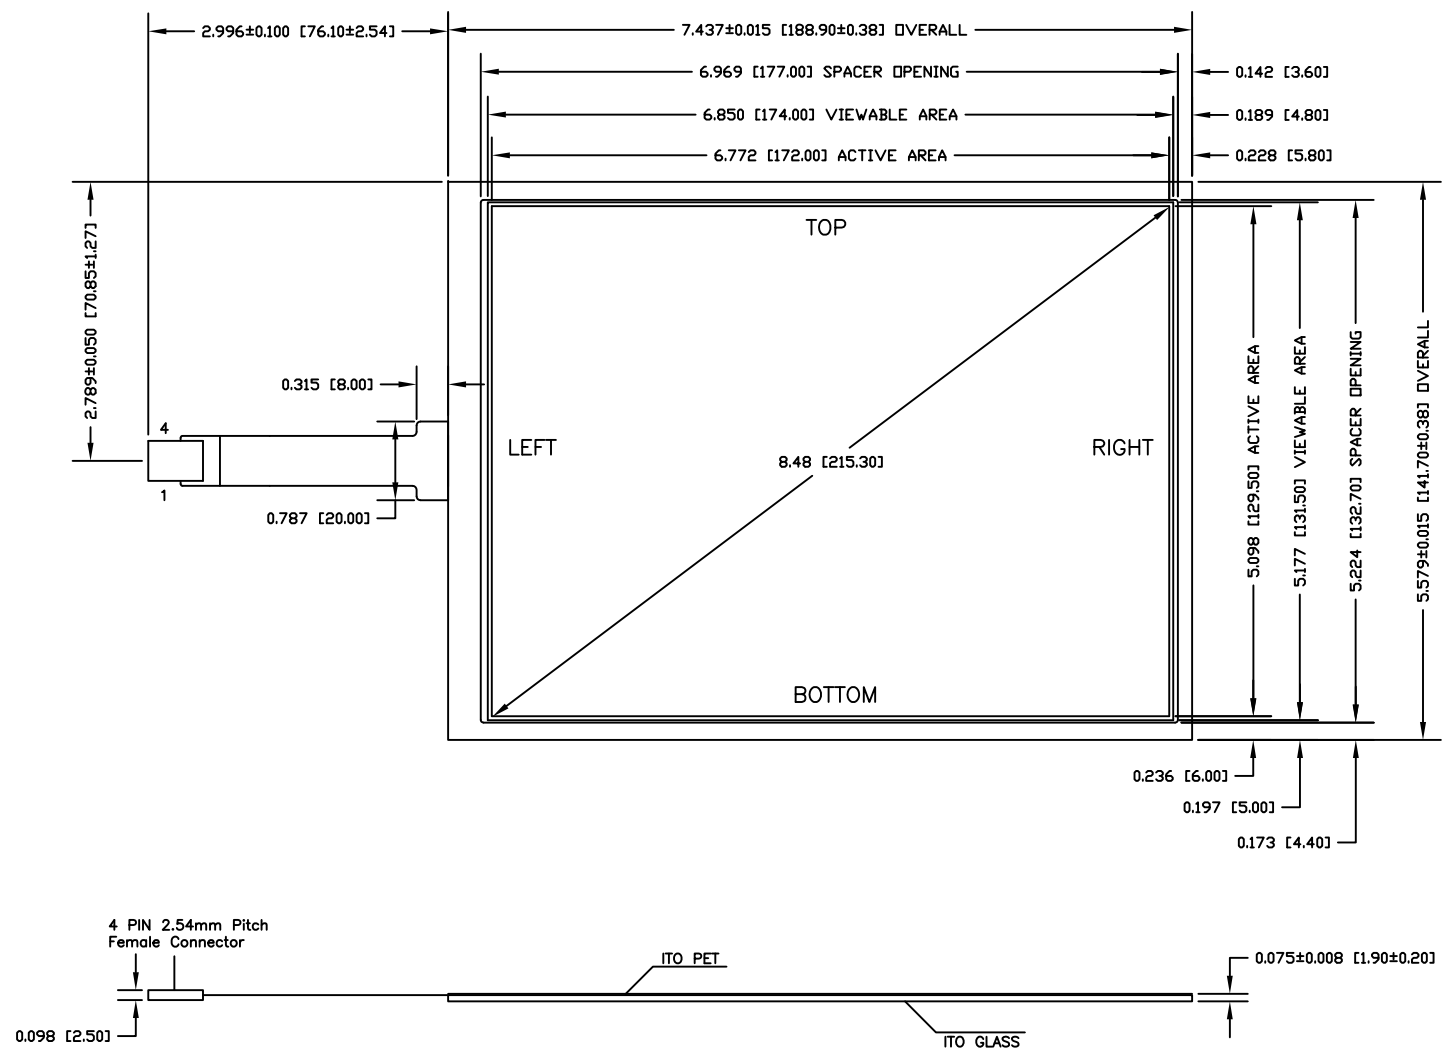

- NOTES:
1. TOLERANCE ±.020 UNLESS NOTED OTHERWISE.
  2. TOP CONDUCTIVE LAYER TO HAVE AN ANTI-GLARE HARDCOATED SURFACE..
  3. PIN ONE IS DESIGNATED BY THE NUMERICAL NUMBER 1 BY CONNECTOR END.
  4. PINOUT TO BE AS INDICATED.  
 PIN 1 - RIGHT.  
 PIN 2 - LEFT.  
 PIN 3 - BOTTOM.  
 PIN 4 - TOP.
  5. TAIL TYPE: IMMERSION GOLD PLATED FPC WITH AMP PLAIN HOUSING AND TIN PLATED CONTACTS

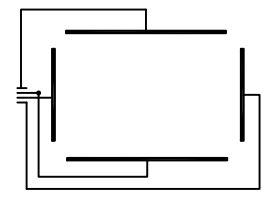

PIN DIAGRAM

BERGQUIST TOUCH PRODUCTS			
301 WASHINGTON STREET CANNON FALLS, MN 55009			
TITLE:	8.48 DIAGONAL 4-WIRE RoHS COMPLIANT		
DRN:	MLR	DATE: 5/30/08	TOL: ±0.020
CHKD:	DATE:	PART #:	9530A
APVD:	DATE:	PART #:	400428
			REV