

# Fuseholders

For 3AG Fuses

**RoHS** **Low Profile** Snap Mount Type



**APPROVALS:** Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

**SPECIFICATIONS:**

**Electrical: 348 Series:** Rated at 15 amps for any voltage up to 250 volts.

**344 Series:** Rated at 15 amps at lamp voltage shown below.

**Dielectric Strength:** 1500 volts minimum.

When designing indicating type fuseholders into a circuit, consideration should be given to the resistance of fractional amperage fuses and the parallel resistance of the indicator lamp and its resistor.

**Mounting:** Panel thickness range: .031" through .125".

**Molded Parts:** Black thermoplastic body (UL 94V0). Thermoplastic bezel, cap and lens (UL94V2). See tables below for colors.

**Terminals:** Brass. Tin-plated.


**Ambient Temperature:**

Non-indicating: -40°C to +85°C.

Indicating: -40°C to +60°C.

**Fuse Installation:** Insert a fuse into the cap and push the assembly into the body until it latches. Press in and down to unlatch for removal.

\* Please refer to Fuseology section for information on proper fuseholder de-rating.

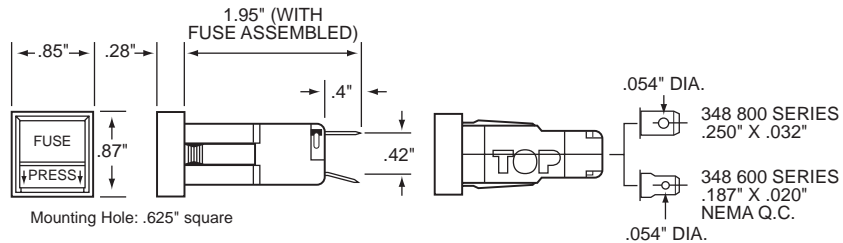

**ORDERING INFORMATION:**

Six-Digit Catalog Numbers Consist of:

| Series Number     | Terminal Style   | Bezel Color | Cap Color                |
|-------------------|--|-------------|--------------------------|
| 348 for 3AG Fuses | 6 for 3/16" wide NEMA Q.C. Terminal<br>8 for 1/4" wide | 7 for Black | 1 for Red<br>7 for Black |


Example: **3 4 8 6 1 1**

# Blown-Fuse

Indicating Snap Mount Type



**APPROVALS AND SPECIFICATIONS:** See above.

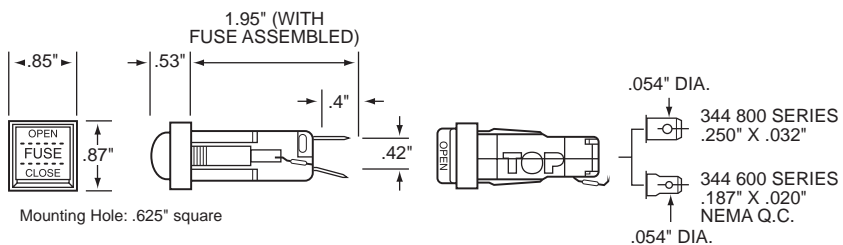

**ORDERING INFORMATION:**

| Catalog Number       |                     | Lamp Type    | Lamp Voltage | Lamp Current | Resistor | Lens Color |
|----------------------|---------------------|--------------|--------------|--------------|----------|------------|
| 3/16" Q.C. Terminals | 1/4" Q.C. Terminals |              |              |              |          |            |
| 344 601              | 344 801             | Incandescent | 6            | 40 ma        | No       | Amber      |
| 344 602              | 344 802             | Incandescent | 14           | 80 ma        | No       | Amber      |
| 344 603              | 344 803             | Incandescent | 28           | 40 ma        | No       | Amber      |
| 344 604              | 344 804             | Neon         | 120          | 1.2 ma       | Yes      | Clear      |
| 344 605              | 344 805             | Neon         | 240          | .3 ma        | Yes      | Clear      |

Standard body and bezel color is black; other bezel colors available on special order.