



5mm FUSE HOLDERS

SLIM LINE & OPTIONAL COVER

• For 5mm x 20mm Fuse

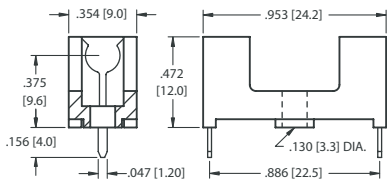

Mounting Detail



SPECIFICATIONS

Base & Cover: Nylon,
UL Rated 94V-0
Clips: Brass, Tin Plate
Rated: 5 Amps @ 250V AC


CAT. NO. 4628 - Holder

CAT. NO. 4628C - Cover only (with window)


- Optional cover with window protects and insulates fuse
- Flame Retardant

LOW PROFILE & OPTIONAL COVER

• For 5mm x 20mm Fuse

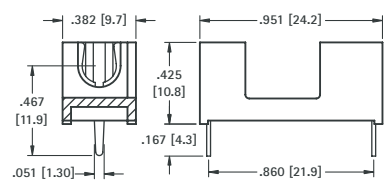

Mounting Detail



SPECIFICATIONS

Base & Cover: Nylon,
UL Rated 94V-0
Clips: Brass, Tin Plate
Rated: 5 Amps @ 250V AC


CAT. NO. 4527 - Holder

CAT. NO. 4527C - Cover only


- Low profile, space saving design
- Optional cover protects and insulates fuse
- Flame Retardant

FULLY INSULATED

• For 5mm x 20mm Fuse

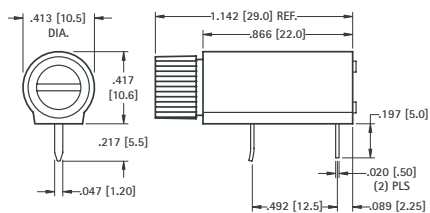

Mounting Detail



SPECIFICATIONS


Base: PBT
Contacts: Brass, Tin Plate
Rated: 10 Amps @ 250V AC

CAT. NO. 4525


- Shock resistant
- Ideal for board edge designs
- Fuse can be accessed from board edge
- Fuse is completely enclosed, protecting fuse from shorting and breaking
- End cap and body supplied unassembled

PC SNAP-IN FUSE HOLDER

• For 5mm x 20mm Fuse

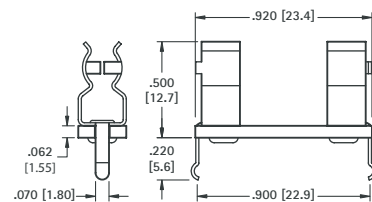

Mounting Detail



SPECIFICATIONS

Base: .062 (1.57) G-10, UL Rated 94V-0
Clips: Brass, Tin Plate
Rated: 6.3 Amps @ 250V AC

CAT. NO. 3527 - Holder


- Snap-in design for wave soldering
- Flame Retardant
- Optional cover protects and insulates fuse - **Cat. No. 3527C**

5mm & 3AG FUSE HOLDERS


3AG FUSE HOLDERS

- For 3AG Fuses .250 x 1.250 (6.35 x 31.8)
- Provides greater mechanical strength than individual clips
- Flame Retardant
- One piece construction assures proper fuse clip orientation which also increases production efficiency
- **Rated:** 15 Amps @ 500V AC

TERMINATION LUGS CAN BE USED WITH WIRES OR PC MOUNT

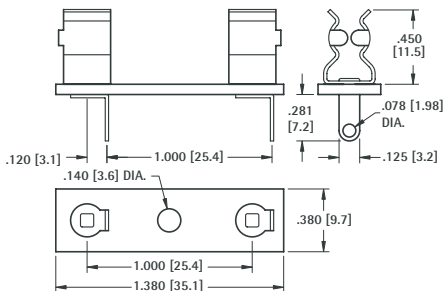

Mounting Detail




SPECIFICATIONS

Base: .062 (1.57) GPO-3,
UL Rated 94V-0
Clips: Brass, Tin Plate


CAT. NO. 3526

Optional cover available - **Cat. No. 4245C**

PRESS-FIT, IDEAL FOR WAVE SOLDERING

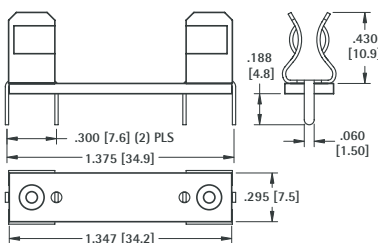

Mounting Detail




SPECIFICATIONS

Base: .062 (1.57) GPO-3,
UL Rated 94V-0
Clips: Brass, Tin Plate


CAT. NO. 4245

Optional cover available - **Cat. No. 4245C**

SNAP-IN DESIGN ASSURES STABILITY DURING WAVE SOLDERING

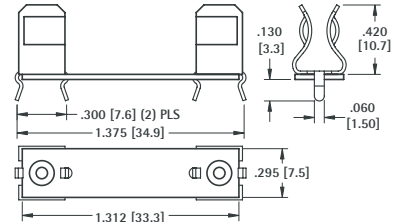

Mounting Detail



SPECIFICATIONS

Base: .032 (1.57) G-10,
UL Rated 94V-0
Clips: Brass, Tin Plate

CAT. NO. 4250

Optional cover available - **Cat. No. 4245C**