


Holder / No. 556

Vertical PC Mount, TR3 Fuses



Specifications

Mounting

PC Board, 5.08mm hole spacing

Materials

Holder: Black Thermoplastic, UL 94V0
Polyamide PA 6.6
Metal parts: Copper alloy
Solderable, tinned

Electrical Data (23°C)

Rated Voltage: 125V
Max. Current/Power: 5A/1.6W

Minimum Cross Section

Conducting path - 0.1mm²

Unit Weight

0.42g

Packaging



Bulk (1000 pcs.)

Order Number

Holder No. 556 0000 000

Holder / No. 557

Horizontal PC Mount, TR3 Fuses

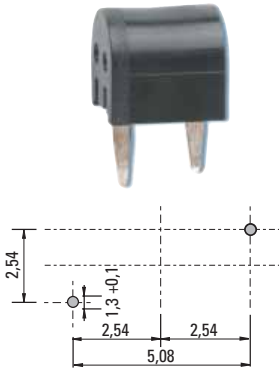

Mounting

PC Board, 5.08mm hole spacing

Materials

Holder: Black Thermoplastic, UL 94V0
Polyamide PA 6.6
Metal parts: Copper alloy
Solderable, tinned

Electrical Data (23°C)

Rated Voltage: 125V
Max. Current/Power: 5A/1.6W

Minimum Cross Section

Conducting path - 0.1mm²

Unit Weight

0.51g

Packaging

Bulk (1000 pcs.)

Order Number

Holder No. 557 0000 000