

Fuseholder Open Design, Holder for MSB and 172876, SMD



125 VAC/DC · 0.9 W (UL/CSA)

**Standards**

- UL 512
- CSA C22.2 no. 39

**Approvals**

- UL File Number: E41738

**References**

General Product Information  
Sicherungshalter zu [MSB](#); [172876](#)  
Packaging Details

**Weblinks**

Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check,  
Distributor-Stock-Check


**Technical Data**

Fuse-Link	2 x 7 mm
Mounting	PCB
Terminal	Solder THT
Rated Voltage	125 VAC/DC
Rated Power Acceptance IEC	0.9W @ Ta 23 °C
Degree of Protection	IP 00
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Tin-Plated Bronze
Unit Weight (Socket/Cap)	0.45 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Approvals

Soldering Methods	Wave
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 10sec acc. to IEC 60068-2-20, Test Tb, method 1A

**Dimensions**

Length 10 mm

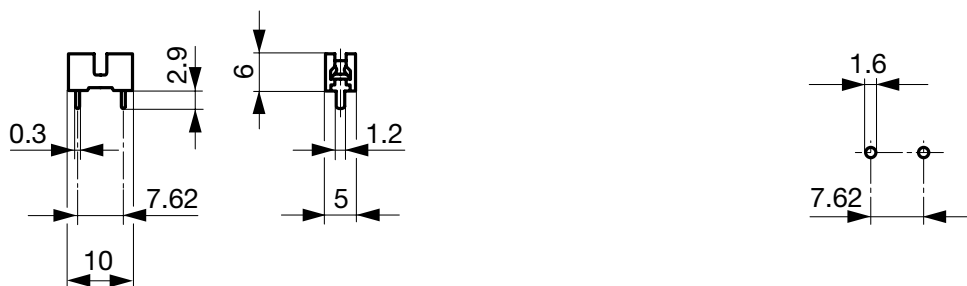

Drilling Diagram

**Variants**

Holder	Order Number
●	7090.9020.xx

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)
**Packaging Unit**

- .xx = .03 Plastic Bag (100 pcs.)
- .xx = .55 Blister Tape (500 pcs.)