



## Holder / No. 850

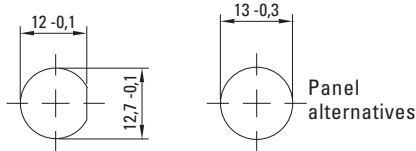


## Panel Mount, Shocksafe 5x20mm Fuses

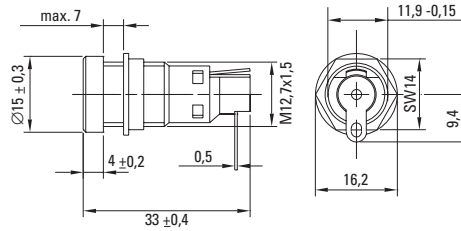



## Cap / No. 855



Without silicon ring (IP 40)

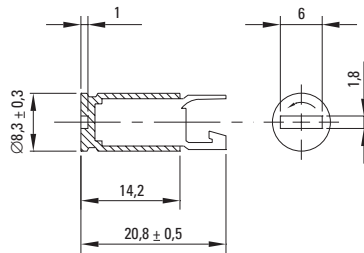


## Holder / No. 851

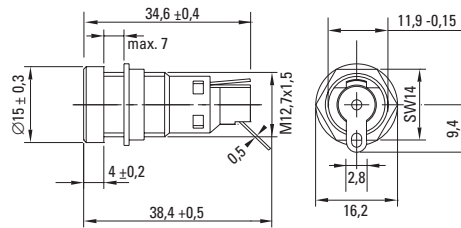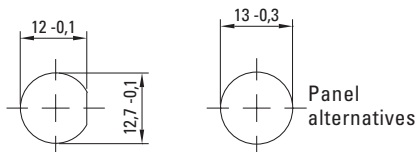

## Cap / No. 856



With silicon ring (IP 54)

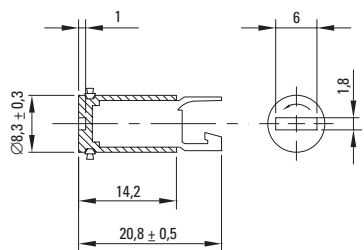

## Specifications

### Standard

IEC 60127-6  
UL 512  
CSA C22.2. No.39

### Approvals

VDE: Report No. 136713 ÜG  
SEMKO: Certificate No. 300691  
UL Recognized: File No. E70164  
CSA Certified: File No. 208327



### Mounting

12.7mm diameter D-hole or 13mm round hole  
Admissible torque on plastic hex nut is 1.2Nm

### Terminals

Solderable only, 4mm x 0.5mm (850)  
Solderable or 2.8mm quick connect - fits 0.5mm tab (851)

### Protection Class & Category

IP 40 (with Cap 855 acc. to IEC 60529)  
IP 54 (with Cap 856 acc. to IEC 60529)  
PC2 (IEC 60127-6)

### Materials

Holder/Cap: Black Duroplast, UL 94V0  
Sealing Ring: Silicon (Cap 856)  
Metal Parts: Copper alloy, corrosion protected  
Terminals: Solderable, tinned

### Electrical Data (23°C)

Rated Voltage: 250V  
Rated Current: 10A  
Rated Power: 4.0W (VDE/SEMKO)

### Operating Temperature

-40°C to +85°C (consider de-rating)

### Climatic Test

-40°C/+85°C/21 days (IEC 60068-2-1...3)

### Stock Conditions

+10°C to +60°C  
relative humidity ≤ 75% yearly average,  
without dew, maximum value for 30 days - 95%

### Vibration Resistance

24 cycles at 15 min. each (IEC 60068-2-6)  
10 - 60Hz at 0.75mm amplitude  
60 - 500Hz at 10g acceleration

### Contact Resistance

≤ 5mΩ

### Impulse Voltage

4 kV, 50 Hz, 1 min., dry

### Insulation Resistance

> 10<sup>3</sup> MΩ (500 VDC, 1 min.)

### Solderability

235°C, 2 sec. (Wave)  
350°C, 1 sec. (Soldering Iron)

### Soldering Heat Resistance

350°C, 5 sec. (IEC 60068-2-20)

### Minimum Cross Section

Conductor - 1.5mm<sup>2</sup>

### Marking

Part No., 250V, Approvals

### Unit Weight

4.1g (850) / 1.8g (855)  
4.2g (851) / 1.9g (856)

Specifications are subject to change without notice.

## Order Information

### Packaging

Bulk (100 pcs.)

### Order Numbers

Holder, IP 40	No. 850 0000 100
Cap, without Ring, IP 40	No. 855 0000 100
Holder, IP 54	No. 851 0000 100
Cap, with Ring, IP 54	No. 856 0000 100

## WebLinks

### Data Sheet - latest version

[www.wickmannusa.com/products/850.pdf](http://www.wickmannusa.com/products/850.pdf)

### Approval Certificates

[www.wickmannusa.com/approvals](http://www.wickmannusa.com/approvals)

### For Application Information refer to

[www.wickmannusa.com/download/fuseology.pdf](http://www.wickmannusa.com/download/fuseology.pdf)