

**Specification Status: Released**



**Max Electrical Rating at 20°C**  
**Max Interrupting Rating: 60A at 600V<sub>AC</sub>**  
**Interrupt Voltage: 250V<sub>AC</sub>**  
**Interrupt Current: 50A<sub>AC</sub>**

Termination Material: Silver Plated Brass



Body Material: Ceramic

Marking:

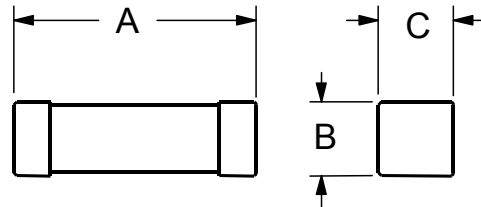

**TABLE I. DIMENSIONS:**

	A TYP	B TYP	C TYP
mm:	10.2	3.1	3.1
in:	(0.402)	(0.122)	(0.122)

**TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):**

CURRENT RATING (A)	RESISTANCE (Ω) TYP	OPENING TIME @		OPERATING TEMPERATURE (°C)		MELTING I <sup>2</sup> t (A <sup>2</sup> s)
		100% of rated current	250% of rated current	MIN	MAX	TYP
0.5	0.5	4 hours min	120 seconds max	-55	125	1

Designed to allow compliance with UL 60950 and TIA 968 Type B Surge Specifications.

Agency Recognition: UL, CSA  
 Precedence: This specification takes precedence over documents referenced herein.  
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

**Materials Information**

**ROHS Compliant**

**ELV Compliant**

