

Specification Status: Released

Max Electrical Rating at 20°C

Max Interrupting Rating: 60A at 600V_{AC}
Interrupt Voltage: 250V_{AC}
Interrupt Current: 50A_{AC}

Termination Material: Silver Plated Brass

Body Material: Ceramic

Marking:

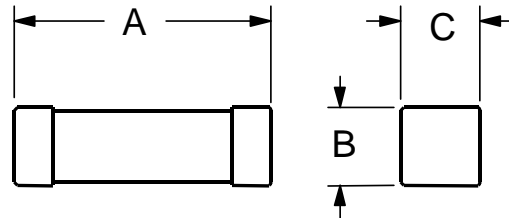



TABLE I. DIMENSIONS:

	A TYP	B TYP	C TYP
mm:	10.2	3.1	3.1
in:	(0.402)	(0.122)	(0.122)

TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):

CURRENT RATING (A)	RESISTANCE (Ω) TYP	OPENING TIME @		OPERATING TEMPERATURE		MELTING I ² t (A ² s)
		100% of rated current	250% of rated current	MIN	MAX	TYP
2.0	0.05	4 hours min	120 seconds max	-55	125	18

Designed to allow compliance with Telcordia GR-1089 CORE, UL 60950, and TIA 968 Surge Specifications.

Agency Recognition: UL, CSA
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

Materials Information

ROHS Compliant

ELV Compliant

