


Part Number: MS15 30004

Ordering Different Lead Types:

Inside Kinked Leads	Use -A after Ametherm's part #
Outside Kinked Leads	Use -B after Ametherm's part #

For example: to order an inside kinked lead use part number MS15 30004-A

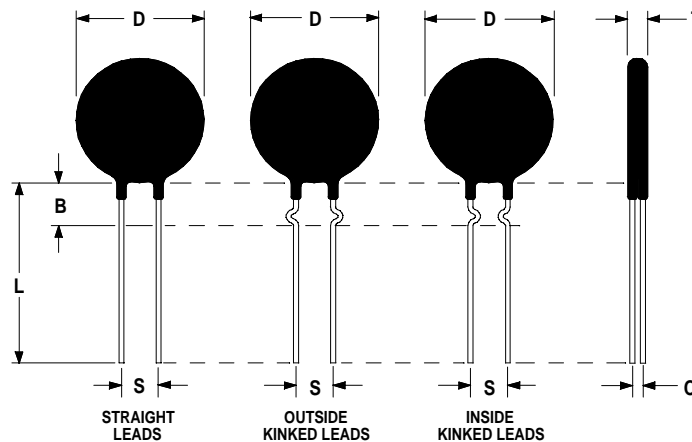

Electrical Specifications:

Resistance @ 25°C	30.0 Ω \pm 25%
Max Steady State Current Up to 65°C	4.2A
Max Recommended Energy Rating (Joules)	135.0 J
Actual Failure Point of Instantaneous Energy (Joules)	270.0 J
Resistance @ 100% of Max Current	0.230 Ω
Resistance @ 50% of Max Current	0.870 Ω
Body Temperature @ 100% Current Rating	150 °C
Dissipation Constant	49.4mW/°C
Thermal Time Constant	114 seconds
Material Type	"H"
Max Recommended Capacitance @ 120/240/440VAC	9300 μ F /2300 μ F/700 μ F

Mechanical Specifications:

D	15.0 \pm 1.0 mm
T	7.0 \pm 0.7 mm
Lead Diameter	1.0 \pm 0.1 mm
S	7.8 \pm 2.0 mm
L	38.0 \pm 9.0 mm
Straight Leads Coating Run Down	5.0 \pm 1.0 mm
B	6.30 \pm 0.60 mm
C	6.50 \pm 0.60 mm

Revision Date: March 19, 2003

Ametherm, Inc. 3111 N. Deer Run Road #4 Carson City, NV 89701
 Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

www.ametherm.com