


PolySwitch™ Resettable Devices

Strap Battery Devices

Raychem Circuit Protection, pioneer of polymeric PTC resettable devices, has developed several material platforms specifically tailored to help protect battery applications. Each of these material platforms offers different performance characteristics, allowing the engineer greater design flexibility. Raychem Circuit Protection's battery protection family includes SRP, LTP, LR4, VTP, VLP, and VLR series, disc, and special application strap devices.

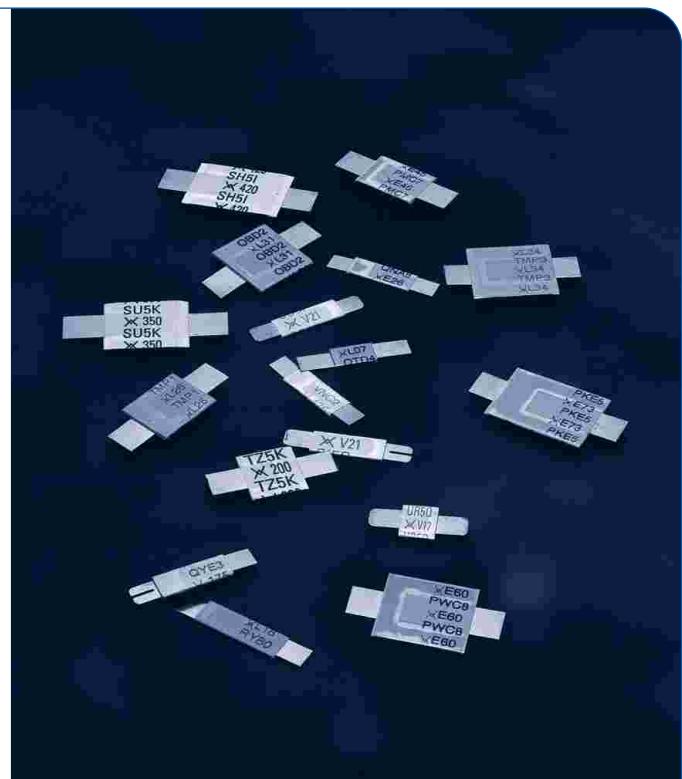

Benefits

- Many material platforms and device form factors give engineers more design flexibility
- Compatible with high-volume electronics assembly
- Assists in meeting regulatory requirements
- Low resistance devices increase battery operating time

Features

- RoHS compliant
- Lead free versions of all devices are available upon request
- Broad range of resettable devices available
- Current ratings from 0.7A to 14.1A
- Voltage ratings from 12V to 30V
- Agency recognition, UL, CSA, TÜV
- Fast time-to-trip
- Low resistance

Applications

- Mobile phone battery packs
- Cordless phone battery packs
- Mobile radio packs
- Computer battery packs
- Camcorder battery packs
- PDA battery packs

Protection Application Selection Guide for Strap Battery Devices

The guide below lists PolySwitch devices which are typically used in these applications.

The following pages contain the specifications for the part numbers recommended below.

Once a device is selected, the user should evaluate and test each product for its intended application.

Protection Application	Additional Comments	PolySwitch Resettable Devices—Key Device Selection Criteria		
		Installation Method	Lowest Resistance	Lowest Thermal Cut-off
Mobile phone battery packs	NiMH	Cylindrical (AAA cell)	VLP210F	VTP170F
		Flexprint	miniSMDE190F	—
		Prismatic	VLP270F	VLR230F
			VTP210GF	—
	Li-ion	Flexprint	miniSMDE190F	—
		Surface Mount	refer to Surface Mount section of this Catalog	
			VLP270F	VLR175F
		VTP210GF	—	—
Cordless phone battery packs	NiMH	Cylindrical	VLP210F	VTP170F
	SRP175F	Cylindrical	LR4-380F	LTP340F
Mobile radio packs				
Computer battery packs	NiMH	Cylindrical	SRP350F	—
	Li-ion	Cylindrical	LR4-900F	—
		Prismatic	LR4-1410F	—
Camcorder battery packs	NiMH or Li-ion		Consult local Rep	Consult local Rep
	Prismatic	VLP270F	VTP210GF	
		LR4-380F	—	
PDA	Li-ion	Prismatic	VLP220F	VLR175F
			VTP175F	—
Power tools (charge line)	NiCd or NiMH	Cylindrical	custom LR4	custom VTP

Table B1 - Product Series - Current Rating, Voltage Rating/Typical Resistance for Strap Battery Devices

Hold Current (A)	VLR	VLP	VTP	LTP	SRP	LR4	miniSMDE
	Typical Activation Temperature						
0.70	—	—	—	15V/0.15Ω	—	—	—
1.00	—	—	—	24V/0.100Ω	—	—	—
1.10	—	—	16V/0.054Ω	—	—	—	—
1.20	—	—	—	—	15V/0.123Ω	—	—
1.70	12V/0.025Ω	—	16V/0.041Ω	—	—	15V/0.061Ω	—
1.75	12V/0.024Ω	—	16V/0.040Ω	—	15V/0.070Ω	—	—
1.80	—	—	—	24V/0.054Ω	—	—	—
1.90	—	—	—	24V/0.044Ω	—	15V/0.056Ω	16V/0.032Ω
2.00	—	—	16V/0.031Ω	—	30V/0.045Ω	—	—
2.10	—	16V/0.024Ω	16V/0.024Ω	—	—	—	—
2.20	—	16V/0.023Ω	—	—	—	—	—
2.30	12V/0.015Ω	—	—	—	—	—	—
2.40	—	—	16V/0.020Ω	—	—	—	—
2.60	—	—	—	24V/0.034Ω	—	15V/0.031Ω	—
2.70	—	16V/0.015Ω	—	—	—	—	—
3.00	—	—	—	24V/0.023Ω	—	—	—
3.40	—	—	—	24V/0.022Ω	—	—	—
3.50	—	—	—	—	30V/0.024Ω	—	—
3.80	—	—	—	—	—	15V/0.020Ω	—
4.20	—	—	—	—	30V/0.018Ω	—	—
4.50	—	—	—	—	—	20V/0.016Ω	—
5.50	—	—	—	—	—	20V/0.013Ω	—
6.00	—	—	—	—	—	20V/0.011Ω	—
7.30	—	—	—	—	—	20V/0.009Ω	—
8.80	—	—	—	—	—	20V/0.085Ω	—
9.00	—	—	—	—	—	20V/0.008Ω	—
13.00	—	—	—	—	—	20V/0.006Ω	—
14.10	—	—	—	—	—	20V/0.004Ω	—

Table B2 - Thermal Derating for Strap Battery Devices [Hold Current (A) at Ambient Temperature (°C)]

Part Number	Maximum Ambient Temperature										
	-40°C	-20°C	0°C	20°C	25°C	40°C	50°C	60°C	70°C	80°C	85°C
85°C Typical Activation											
VLR*											
VLR170F	3.5	2.9	2.4	1.84	1.7	1.2	1.0	0.7	0.3	—	—
VLR170LF	3.5	2.9	2.4	1.84	1.7	1.2	1.0	0.7	0.3	—	—
VLR170UF	3.5	2.9	2.4	1.84	1.7	1.2	1.0	0.7	0.3	—	—
VLR175F	3.5	2.9	2.4	1.87	1.75	1.3	1.0	0.8	0.3	—	—
VLR175LF	3.5	2.9	2.4	1.87	1.75	1.3	1.0	0.8	0.3	—	—
VLR175UF	3.5	2.9	2.4	1.87	1.75	1.3	1.0	0.8	0.3	—	—
VLR230F	5.0	4.2	3.4	2.52	2.3	1.7	1.3	0.9	0.4	—	—
VLR230F-C36	5.0	4.2	3.4	2.52	2.3	1.7	1.3	0.9	0.4	—	—
VLR230SF	5.0	4.2	3.4	2.52	2.3	1.7	1.3	0.9	0.4	—	—
VLR230SUF	5.0	4.2	3.4	2.52	2.3	1.7	1.3	0.9	0.4	—	—
VLR230UF	5.0	4.2	3.4	2.52	2.3	1.7	1.3	0.9	0.4	—	—
90°C Typical Activation											
VLP*											
VLP210F	4.3	3.6	2.9	2.31	2.1	1.6	1.3	1.0	0.6	0.3	0.1
VLP220F	4.5	3.8	3.0	2.45	2.2	1.7	1.4	1.1	0.7	0.3	0.1
VLP270F	5.6	4.7	4.0	3.05	2.7	2.2	1.7	1.4	0.9	0.4	0.1
90°C Typical Activation											
VTP*											
VTP110F	2.0	1.7	1.4	1.02	1.1	0.8	0.6	0.5	0.3	0.2	0.1
VTP170F	3.2	2.7	2.2	1.80	1.7	1.3	1.0	0.8	0.5	0.3	0.1
VTP170SSF	3.2	2.7	2.2	1.80	1.7	1.3	1.0	0.8	0.5	0.3	0.1
VTP170XF	3.2	2.7	2.2	1.80	1.7	1.3	1.0	0.8	0.5	0.3	0.1
VTP170XSF	3.2	2.7	2.2	1.80	1.7	1.3	1.0	0.8	0.5	0.3	0.1
VTP175F	3.2	2.7	2.2	1.84	1.75	1.3	1.0	0.8	0.5	0.3	0.1
VTP175LF	3.2	2.7	2.2	1.84	1.75	1.3	1.0	0.8	0.5	0.3	0.1
VTP175UF	3.2	2.7	2.2	1.84	1.75	1.3	1.0	0.8	0.5	0.3	0.1
VTP200GF	3.7	3.2	2.6	2.12	2.0	1.5	1.2	0.9	0.5	0.3	0.1
VTP200UF	3.7	3.2	2.6	2.12	2.0	1.5	1.2	0.9	0.5	0.3	0.1
VTP210GF	4.1	3.5	2.9	2.26	2.1	1.6	1.3	1.0	0.7	0.4	0.1
VTP210LF	4.1	3.5	2.9	2.26	2.1	1.6	1.3	1.0	0.7	0.4	0.1
VTP210SF	4.1	3.5	2.9	2.26	2.1	1.6	1.3	1.0	0.7	0.4	0.1
VTP210SLF	4.1	3.5	2.9	2.26	2.1	1.6	1.3	1.0	0.7	0.4	0.1
VTP210SLF-19.2/5.8	4.1	3.5	2.9	2.26	2.1	1.6	1.3	1.0	0.7	0.4	0.1
VTP210SSF	4.1	3.5	2.9	2.26	2.1	1.6	1.3	1.0	0.7	0.4	0.1
VTP210ULDF	4.1	3.5	2.9	2.26	2.1	1.6	1.3	1.0	0.7	0.4	0.1
VTP240F	4.4	3.7	3.1	2.54	2.4	1.8	1.5	1.2	0.9	0.5	0.1
90°C Typical Activation											
LTP											
LTP070F	1.1	1.0	0.8	0.7	0.65	0.5	0.4	0.3	0.2	0.2	0.1
LTP070SF	1.1	1.0	0.8	0.7	0.65	0.5	0.4	0.3	0.2	0.2	0.1
LTP100F	1.8	1.6	1.4	1.0	0.99	0.8	0.7	0.6	0.4	0.3	0.2
LTP100SF	1.8	1.6	1.4	1.0	0.99	0.8	0.7	0.6	0.4	0.3	0.2
LTP100SLF	1.8	1.6	1.4	1.0	0.99	0.8	0.7	0.6	0.4	0.3	0.2
LTP100SSF	1.8	1.6	1.4	1.0	0.99	0.8	0.7	0.6	0.4	0.3	0.2
LTP180F	3.1	2.6	2.2	1.8	1.67	1.3	1.1	0.9	0.6	0.4	0.3
LTP180LF	3.1	2.6	2.2	1.8	1.67	1.3	1.1	0.9	0.6	0.4	0.3
LTP180SF	3.1	2.6	2.2	1.8	1.67	1.3	1.1	0.9	0.6	0.4	0.3
LTP190F	3.3	2.8	2.4	1.9	1.79	1.4	1.2	1.1	0.7	0.5	0.4
LTP260F	4.3	3.7	3.1	2.6	2.42	1.9	1.6	1.4	1.1	0.8	0.6
LTP300F	5.1	4.4	3.7	3.0	2.82	2.3	1.9	1.6	1.2	0.9	0.7
LTP340F	5.5	4.7	4.0	3.4	3.17	2.6	2.2	1.9	1.5	1.1	0.9
miniSMDE											
miniSMDE190F	3.0	2.6	2.2	1.9	1.74	1.4	1.2	1.1	0.7	0.5	0.4

* Product electrical characteristics determined at 25°C



RoHS compliant, ELV compliant

Table B2 - Thermal Derating for Strap Battery Devices [Hold Current (A) at Ambient Temperature (°C)] ... Cont'd

Part Number	Amps	Maximum Ambient Temperature										
		-40°C	-20°C	0°C	20°C	25°C	40°C	50°C	60°C	70°C	80°C	
125°C Typical Activation												
LR4												
LR4-170UF	2.5	2.2	2.0	1.7	1.64	1.4	1.3	1.2	1.0	0.9	0.8	
LR4-190F	2.8	2.5	2.3	1.9	1.86	1.6	1.5	1.4	1.2	1.1	1.0	
LR4-190SF	2.8	2.5	2.3	1.9	1.86	1.6	1.5	1.4	1.2	1.1	1.0	
LR4-260F	3.8	3.4	3.1	2.6	2.54	2.2	2.0	1.9	1.7	1.4	1.3	
LR4-260SF	3.8	3.4	3.1	2.6	2.54	2.2	2.0	1.9	1.7	1.4	1.3	
LR4-380F	5.4	4.9	4.4	3.8	3.64	3.3	3.0	2.8	2.5	2.3	2.1	
LR4-380XF	5.4	4.9	4.4	3.8	3.64	3.3	3.0	2.8	2.5	2.3	2.1	
LR4-450F	6.5	5.8	5.3	4.5	4.38	3.9	3.6	3.3	2.9	2.6	2.4	
LR4-550F	7.6	6.9	6.2	5.5	5.32	4.7	4.3	4.0	3.6	3.2	3.0	
LR4-600F	8.7	7.8	7.1	6.0	5.86	5.2	4.7	4.4	3.9	3.4	3.2	
LR4-600XF	8.7	7.8	7.1	6.0	5.86	5.2	4.7	4.4	3.9	3.4	3.2	
LR4-730F	10.5	9.5	8.6	7.3	7.13	6.3	5.7	5.4	4.7	4.2	4.0	
LR4-880SSF	12.3	11.0	9.8	8.8	8.3	7.4	6.8	6.2	5.5	4.8	4.5	
LR4-900F	12.7	11.4	10	9.0	8.5	7.5	6.8	6.2	5.5	4.9	4.5	
LR4-1300SSF	17.9	16.2	14.5	13.0	12.4	11.1	10.3	9.5	8.6	7.7	7.2	
LR4-1410F	19.9	17.8	15.7	14.1	13.3	11.8	10.8	9.7	8.7	7.7	7.2	
SRP												
SRP120F	1.9	1.7	1.5	1.2	1.17	1.0	0.9	0.8	0.6	0.5	0.4	
SRP120LF	1.9	1.7	1.5	1.2	1.17	1.0	0.9	0.8	0.6	0.5	0.4	
SRP120SF	1.9	1.7	1.5	1.2	1.17	1.0	0.9	0.8	0.6	0.5	0.4	
SRP175F	2.5	2.2	2.0	1.75	1.68	1.4	1.3	1.2	1.0	0.9	0.8	
SRP175LF	2.5	2.2	2.0	1.75	1.68	1.4	1.3	1.2	1.0	0.9	0.8	
SRP175SF	2.5	2.2	2.0	1.75	1.68	1.4	1.3	1.2	1.0	0.9	0.8	
SRP175SSF	2.5	2.2	2.0	1.75	1.68	1.4	1.3	1.2	1.0	0.9	0.8	
SRP200F	3.1	2.8	2.5	2.0	1.97	1.7	1.5	1.4	1.2	1.0	0.9	
SRP350F	5.3	4.8	4.3	3.5	3.44	3.0	2.7	2.5	2.1	1.8	1.7	
SRP420F	6.3	5.7	5.1	4.2	4.11	3.6	3.3	3.0	2.6	2.2	2.1	

Figure B1 - Thermal Derating Curve

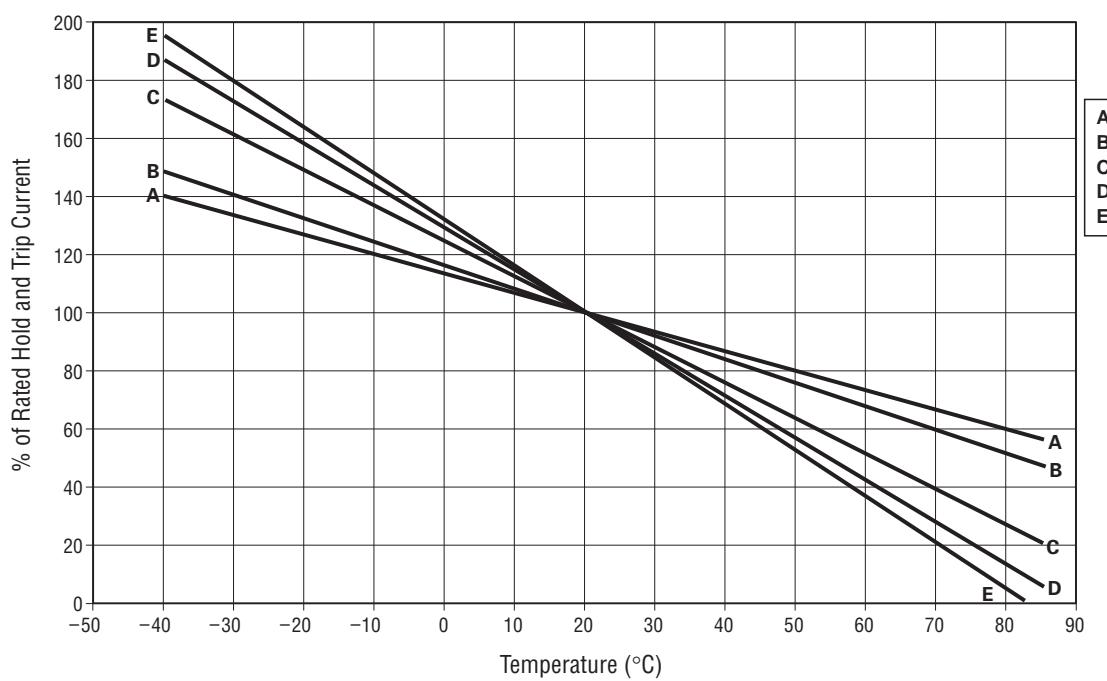


Table B3 - Electrical Characteristics for Strap Battery Devices

Part Number	I _H (A)	I _T (A)	V _{Max} (V _{AC})	I _{Max} (A)	P _{D TYP} (W)	Max. Time-to-trip (A)	R _{Min} (Ω)	R _{TYP} (Ω)	R _{Max} (Ω)	R _{Tripped TYP} (Ω)	R _{1 Max} (Ω)	Figure for Dimension
85°C Typical Activation*												
VLR												
VLR170F	1.7	4.1	12	100	1.4	8.5	5.0	0.018	0.025	0.032	0.050	0.064 B5
VLR170LF	1.7	4.1	12	100	1.4	8.5	5.0	0.018	0.025	0.032	0.050	0.064 B5
VLR170UF	1.7	4.1	12	100	1.4	8.5	5.0	0.018	0.025	0.032	0.050	0.064 B8
VLR175F	1.75	4.2	12	100	1.4	8.75	5.0	0.017	0.024	0.031	0.048	0.062 B5
VLR175LF	1.75	4.2	12	100	1.4	8.75	5.0	0.017	0.024	0.031	0.048	0.062 B5
VLR175UF	1.8	4.2	12	100	1.4	8.75	5.0	0.017	0.024	0.031	0.048	0.062 B8
VLR230F	2.3	5.0	12	100	1.4	10.0	5.0	0.012	0.015	0.018	0.030	0.036 B5
VLR230F-C36	2.3	5.0	12	100	1.4	10.0	5.0	0.012	0.015	0.018	0.030	0.036 B5
VLR230SF	2.3	5.0	12	100	1.4	10.0	5.0	0.012	0.015	0.018	0.030	0.036 B6
VLR230SUF	2.3	5.0	12	100	1.4	10.0	5.0	0.012	0.015	0.018	0.030	0.036 B6
VLR230UF	2.3	5.0	12	100	1.4	10.0	5.0	0.012	0.015	0.018	0.030	0.036 B8
90°C Typical Activation*												
VLP												
VLP210F	2.1	5.0	16	60	0.8	10.5	5.0	0.018	0.024	0.030	0.048	0.060 B4
VLP220F	2.1	5.3	16	60	0.8	11.0	5.0	0.017	0.023	0.029	0.046	0.058 B5
VLP270F	2.7	6.5	16	60	1.2	13.5	5.0	0.012	0.015	0.018	0.030	0.036 B5
90°C Typical Activation*												
VTP												
VTP110F	1.1	2.7	16	100	0.7	7.0	5.0	0.038	0.054	0.070	0.108	0.140 B8
VTP170F	1.7	3.4	16	100	1.0	8.5	5.0	0.030	0.041	0.052	0.082	0.105 B4
VTP170XF	1.7	3.4	16	100	0.7	8.5	5.0	0.030	0.041	0.052	0.082	0.105 B5
VTP170XSF	1.7	3.4	16	100	0.7	8.5	5.0	0.030	0.041	0.052	0.082	0.105 B6
VTP175F	1.75	3.6	16	100	0.8	8.75	5.0	0.029	0.040	0.051	0.080	0.102 B5
VTP175LF	1.75	3.6	16	100	0.8	8.75	5.0	0.029	0.040	0.051	0.080	0.102 B5
VTP175UF	1.75	3.6	16	100	0.8	8.75	5.0	0.029	0.040	0.051	0.080	0.102 B8
VTP200GF	2.0	4.7	16	100	0.9	10.0	5.0	0.022	0.031	0.039	0.062	0.078 B5
VTP200UF	2.0	4.7	16	100	0.9	10.0	5.0	0.022	0.031	0.039	0.062	0.078 B8
VTP210GF	2.1	4.7	16	100	1.2	10.0	5.0	0.018	0.024	0.030	0.048	0.060 B5
VTP210LF	2.1	4.7	16	100	1.2	10.0	5.0	0.018	0.024	0.030	0.048	0.060 B5
VTP210SF	2.1	4.7	16	100	1.2	10.0	5.0	0.018	0.024	0.030	0.048	0.060 B6
VTP210SLF	2.1	4.7	16	100	1.2	10.0	5.0	0.018	0.024	0.030	0.048	0.060 B6
VTP210SLF-19.2/5.8	2.1	4.7	16	100	1.2	10.0	5.0	0.018	0.024	0.030	0.048	0.060 B6
VTP210SSF	2.1	4.7	16	100	1.2	10.0	5.0	0.018	0.024	0.030	0.048	0.060 B7
VTP210ULDF	2.1	4.7	16	100	1.2	10.0	5.0	0.018	0.024	0.030	0.048	0.060 B8
VTP240F	2.4	5.9	16	100	1.2	12.0	5.0	0.014	0.020	0.026	0.040	0.052 B5
110°C Typical Activation												
LTP												
LTP070F	0.7	1.45	15	100	0.7	3.5	5.0	0.100	0.150	0.200	0.300	0.340 B9
LTP070SF	0.7	1.45	15	100	0.7	3.5	5.0	0.100	0.150	0.200	0.300	0.340 B10
LTP100F	1.0	2.50	24	100	0.9	5.0	7.0	0.070	0.100	0.130	0.200	0.260 B9
LTP100SF	1.0	2.50	24	100	0.9	5.0	7.0	0.070	0.100	0.130	0.200	0.260 B10
LTP100SLF	1.0	2.50	24	100	0.9	5.0	7.0	0.070	0.100	0.130	0.200	0.260 B10
LTP100SSF	1.0	2.50	24	100	0.9	5.0	7.0	0.070	0.100	0.130	0.200	0.260 B11
LTP180F	1.8	3.80	24	100	1.0	9.0	2.9	0.040	0.054	0.068	0.108	0.120 B9
LTP180LF	1.8	3.80	24	100	1.0	9.0	2.9	0.040	0.054	0.068	0.108	0.120 B9
LTP180SF	1.8	3.80	24	100	1.0	9.0	2.9	0.040	0.054	0.068	0.108	0.120 B10
LTP190F	1.9	4.20	24	100	1.9	10.0	3.0	0.030	0.044	0.057	0.088	0.100 B9
LTP260F	2.6	5.20	24	100	1.3	13.0	5.0	0.025	0.034	0.042	0.068	0.076 B9
LTP300F	3.0	6.30	24	100	1.7	15.0	4.0	0.015	0.023	0.031	0.046	0.055 B9
LTP340F	3.4	6.80	24	100	1.6	17.0	5.0	0.016	0.022	0.027	0.044	0.050 B9

* Product electrical characteristics determined at 25°C

Table B3 - Electrical Characteristics for Strap Battery Devices

... Cont'd

Part Number	I _H (A)	I _T (A)	V _{Max} (V _{AC})	I _{Max} (A)	P _{D TYP} (W)	Max. Time-to-trip (A)	R _{Min} (Ω)	R _{TYP} (Ω)	R _{Max} (Ω)	R _{Tripped TYP} (Ω)	R _{1 Max} (Ω)	Figure for Dimension
miniSMDE												
miniSMDE190F	1.9	3.8	16	100	1.5	10.0	2.0	0.024	0.032	0.040	0.060	0.080 [†] B17
125°C Typical Activation												
LR4												
LR4-170UF	1.7	3.4	15	100	0.8	8.5	5.0	0.044	0.061	0.078	0.089	0.114 B14
LR4-190F	1.9	3.9	15	100	0.8	9.5	5.0	0.039	0.056	0.072	0.079	0.102 B12
LR4-190SF	1.9	3.9	15	100	0.8	9.5	5.0	0.039	0.056	0.072	0.079	0.102 B13
LR4-260F	2.6	5.8	15	100	1.0	13.0	5.0	0.020	0.031	0.042	0.046	0.063 B12
LR4-260SF	2.6	5.8	15	100	1.0	13.0	5.0	0.020	0.031	0.042	0.046	0.063 B13
LR4-380F	3.8	8.3	15	100	1.2	19.0	5.0	0.013	0.020	0.026	0.028	0.037 B12
LR4-380XF	3.8	8.3	15	100	1.2	19.0	5.0	0.013	0.020	0.026	0.028	0.037 B12
LR4-450F	4.5	8.9	20	100	1.4	22.5	5.0	0.011	0.016	0.020	0.022	0.028 B12
LR4-550F	5.5	10.5	20	100	2.0	27.5	5.0	0.009	0.013	0.016	0.018	0.022 B12
LR4-600F	6.0	11.7	20	100	1.7	30.0	5.0	0.007	0.011	0.014	0.015	0.019 B12
LR4-600XF	6.0	11.7	20	100	1.7	30.0	5.0	0.0075	0.012	0.014	0.015	0.019 B12
LR4-730F	7.3	14.1	20	100	1.9	30.0	5.0	0.006	0.009	0.012	0.011	0.015 B12
LR4-880SSF	8.8	16.0	20	100	2.0	44.0	5.0	0.0065	0.0085	0.0105	0.012	0.0145 B13
LR4-900F	9.0	16.7	20	100	3.0	45.0	5.0	0.006	0.008	0.010	0.011	0.014 B12
LR4-1300SSF	13.0	21.2	20	100	2.2	50.0	10.0	0.004	0.006	0.007	0.008	0.009 B13
LR4-1410F	14.1	26.2	20	100	2.2	70.0	5.0	0.003	0.004	0.005	0.060	0.007 B12
SRP												
SRP120F	1.2	2.7	15	100	0.8	6.0	5.0	0.085	0.123	0.160	0.170	0.220 B9
SRP120LF	1.2	2.7	15	100	0.8	6.0	5.0	0.085	0.123	0.160	0.170	0.220 B9
SRP120SF	1.2	2.7	15	100	0.8	6.0	5.0	0.085	0.123	0.160	0.170	0.220 B15
SRP175F	1.75	3.8	15	100	0.9	8.75	5.0	0.050	0.070	0.090	0.093	0.120 B9
SRP175LF	1.75	3.8	15	100	0.9	8.75	5.0	0.050	0.070	0.090	0.093	0.120 B9
SRP175SF	1.75	3.8	15	100	0.9	8.75	5.0	0.050	0.070	0.090	0.093	0.120 B15
SRP175SSF	1.75	3.8	15	100	0.9	8.75	5.0	0.050	0.070	0.090	0.093	0.120 B16
SRP200F	2.0	4.4	30	100	1.6	10.0	4.0	0.030	0.045	0.060	0.075	0.100 B9
SRP350F	3.5	6.3	30	100	1.9	20.0	3.0	0.017	0.024	0.031	0.040	0.050 B9
SRP420F	4.2	7.6	30	100	2.2	20.0	6.0	0.012	0.018	0.024	0.030	0.040 B9

Notes:

- I_H = Hold current: maximum current device will pass without interruption in 20°C still air unless otherwise specified.
- I_T = Trip current: minimum current that will switch the device from low resistance to high resistance in 20°C still air unless otherwise specified.
- V_{MAX} = Maximum voltage device can withstand without damage at rated current.
- I_{MAX} = Maximum fault current device can withstand without damage at rated voltage.
- P_D = Power dissipated from device when in the tripped state in 20°C still air unless otherwise specified.
- R_{MIN} = Minimum resistance of device as supplied at 20°C unless otherwise specified.
- R_{TYP} = Typical resistance of device as supplied at 20°C unless otherwise specified.
- R_{TRIPPED TYP} = Typical resistance, measured at 20°C unless otherwise specified, of device one hour after being tripped the first time.
- R_{MAX} = Maximum resistance of device as supplied at 20°C unless otherwise specified.
- * = Product electrical characteristics determined at 25°C.
- † = R_{1max} value for this device is the maximum resistance of the device at 20°C one hour after reflow.

Figures B2-B15 - Dimension Figures for Strap Battery Devices

Figure B2

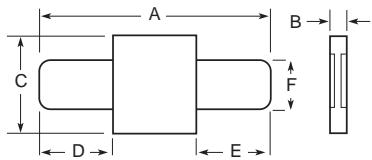


Figure B3

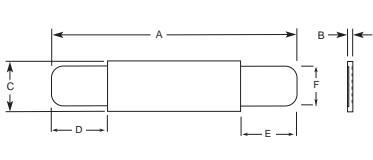


Figure B4

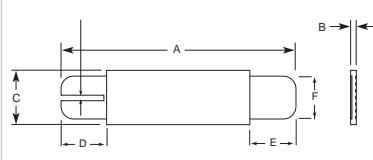


Figure B5

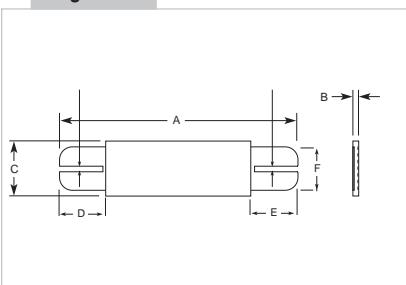


Figure B6

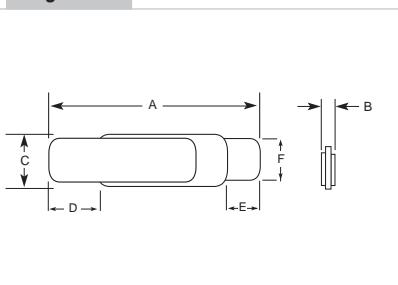


Figure B7

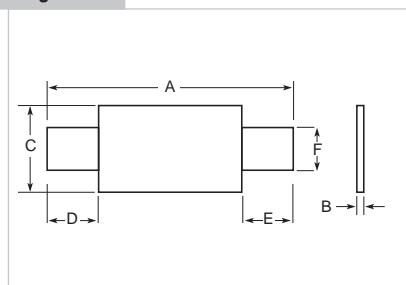


Figure B8

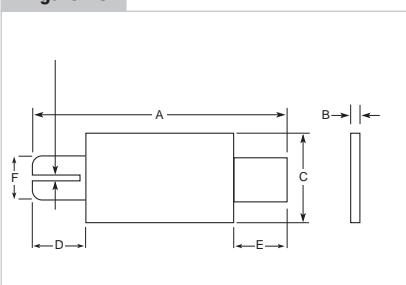


Figure B9

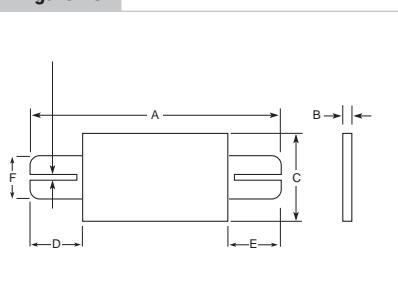


Figure B10

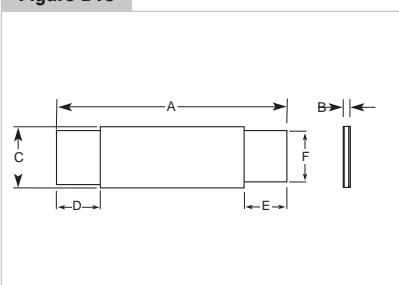


Figure B11

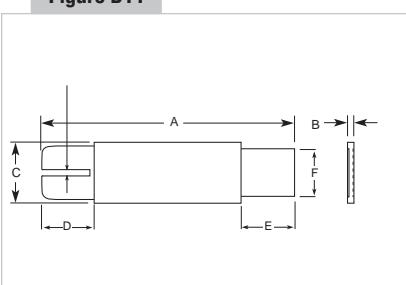


Figure B12

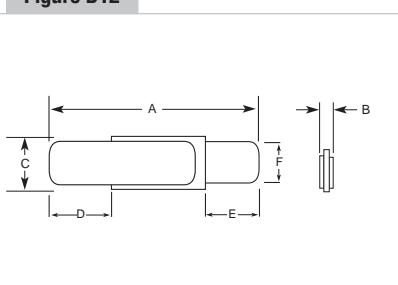


Figure B13

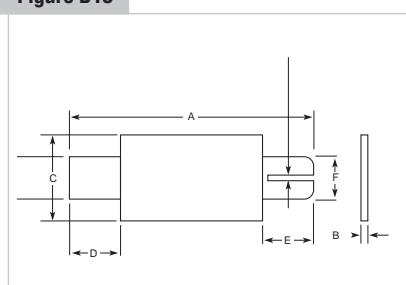


Figure B14

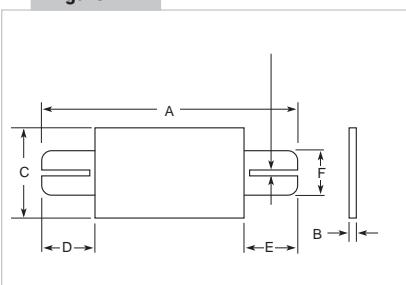


Figure B15

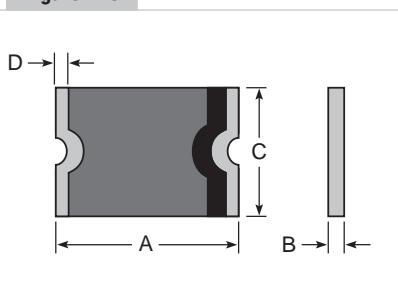


Table B4 - Dimensions for Strap Battery Devices in Millimeters (Inches)

Part Number	Dimension												Figure
	A Min.	A Max.	B Min.	B Max.	C Min.	C Max.	D Min.	D Max.	E Min.	E Max.	F Min.	F Max.	
85°C Typical Activation													
VLR													
VLR170F	20.8 (0.82)	23.2 (0.91)	—	0.8 (0.03)	3.5 (0.14)	3.9 (0.15)	4.5 (0.18)	6.5 (0.26)	4.5 (0.18)	6.5 (0.26)	2.4 (0.09)	2.6 (0.10)	B3
VLR170LF	38.8 (1.53)	41.2 (1.62)	—	0.8 (0.03)	3.5 (0.14)	3.9 (0.15)	8.7 (0.34)	10.3 (0.41)	18.7 (0.74)	20.3 (0.80)	2.4 (0.09)	2.6 (0.10)	B3
VLR170UF	20.8 (0.81)	23.2 (0.91)	—	0.07 (0.03)	3.5 (0.14)	3.7 (0.15)	5.3 (0.21)	6.7 (0.26)	5.3 (0.21)	6.7 (0.26)	2.4 (0.09)	2.6 (0.10)	B6
VLR175F	23.0 (0.91)	24.5 (0.96)	—	0.8 (0.03)	2.9 (0.11)	3.3 (0.13)	4.7 (0.19)	7.2 (0.28)	3.8 (0.15)	5.4 (0.21)	2.4 (0.09)	2.6 (0.10)	B3
VLR175LF	29.3 (1.15)	31.7 (1.25)	—	0.8 (0.03)	2.9 (0.11)	3.3 (0.13)	5.2 (0.21)	6.8 (0.27)	10.0 (0.39)	12.5 (0.49)	2.4 (0.09)	2.6 (0.10)	B3
VLR175UF	23.0 (0.91)	24.5 (0.96)	—	0.7 (0.03)	2.9 (0.11)	3.1 (0.12)	5.2 (0.20)	7.5 (0.30)	4.3 (0.17)	5.7 (0.22)	2.4 (0.09)	2.6 (0.10)	B6
VLR230F	20.9 (0.82)	23.1 (0.91)	—	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	4.1 (0.16)	5.8 (0.23)	4.1 (0.16)	5.8 (0.23)	3.9 (0.15)	4.1 (0.16)	B3
VLR230F-C36	25.3 (0.10)	27.7 (1.09)	—	0.8 (0.03)	3.5 (0.14)	3.9 (0.15)	3.5 (0.14)	5.7 (0.22)	3.5 (0.14)	5.7 (0.22)	2.9 (0.11)	3.1 (0.12)	B10
VLR230SF	20.9 (0.82)	23.1 (0.91)	—	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	4.1 (0.16)	5.8 (0.23)	4.1 (0.16)	5.8 (0.23)	3.9 (0.15)	4.1 (0.16)	B4
VLR230SUF	20.9 (0.82)	23.1 (0.91)	—	0.7 (0.03)	4.9 (0.19)	5.1 (0.20)	4.1 (0.16)	6.0 (0.24)	4.1 (0.16)	6.0 (0.24)	3.9 (0.15)	4.1 (0.16)	B4
VLR230UF	20.9 (0.82)	23.1 (0.91)	—	0.7 (0.03)	4.9 (0.19)	5.1 (0.20)	4.1 (0.16)	6.0 (0.24)	4.1 (0.16)	6.0 (0.24)	3.9 (0.15)	4.1 (0.16)	B6
90°C Typical Activation													
VLP													
VLP210F	15.4 (0.606)	17.5 (0.689)	0.6 (0.02)	0.8 (0.03)	6.9 (0.27)	7.3 (0.287)	4.0 (0.157)	6.2 (0.244)	4.0 (0.157)	6.2 (0.244)	3.9 (0.15)	4.1 (0.16)	B2
VLP220F	21.1 (0.83)	23.3 (0.92)	0.6 (0.02)	0.8 (0.03)	3.5 (0.13)	3.9 (0.15)	5.1 (0.20)	6.8 (0.27)	5.1 (0.20)	6.8 (0.27)	2.9 (0.11)	3.1 (0.12)	B3
VLP270F	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	4.1 (0.16)	5.8 (0.23)	4.1 (0.16)	5.8 (0.23)	3.9 (0.15)	4.1 (0.16)	B3
90°C Typical Activation													
VTP													
VTP110F	23.6 (0.93)	25.6 (1.01)	—	0.7 (0.03)	2.7 (0.11)	2.9 (0.11)	7.0 (0.28)	8.0 (0.32)	7.0 (0.28)	8.0 (0.32)	2.3 (0.09)	2.5 (0.10)	B6
VTP170F	15.4 (0.606)	17.5 (0.689)	0.5 (0.02)	0.8 (0.03)	7.0 (0.275)	7.4 (0.292)	4.0 (0.157)	6.2 (0.244)	4.0 (0.157)	6.2 (0.244)	3.9 (0.15)	4.1 (0.16)	B2
VTP170SSF	15.4 (0.606)	17.5 (0.689)	0.5 (0.02)	0.8 (0.03)	7.0 (0.275)	7.4 (0.292)	4.0 (0.157)	6.2 (0.244)	4.0 (0.157)	6.2 (0.244)	3.9 (0.154)	4.1 (0.161)	B9
VTP170XF	20.9 (0.82)	22.9 (0.90)	0.5 (0.02)	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	6.0 (0.23)	8.6 (0.34)	6.0 (0.23)	8.6 (0.34)	3.9 (0.15)	4.1 (0.16)	B3
VTP170XSF	20.9 (0.82)	22.9 (0.90)	0.5 (0.02)	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	6.0 (0.23)	8.6 (0.34)	6.0 (0.23)	8.6 (0.34)	3.9 (0.15)	4.1 (0.16)	B4
VTP175F	21.2 (0.83)	23.2 (0.91)	—	0.8 (0.03)	3.5 (0.14)	3.9 (0.15)	4.6 (0.18)	6.6 (0.26)	4.6 (0.18)	6.6 (0.26)	2.9 (0.11)	3.1 (0.12)	B3
VTP175LF	25.8 (1.02)	28.2 (1.11)	—	0.8 (0.03)	3.5 (0.13)	3.9 (0.15)	5.7 (0.22)	7.3 (0.29)	8.7 (0.34)	10.3 (0.41)	2.4 (0.09)	2.6 (0.10)	B3
VTP175UF	21.2 (0.83)	23.2 (0.91)	—	0.7 (0.03)	3.5 (0.13)	3.7 (0.15)	5.6 (0.22)	6.8 (0.27)	5.6 (0.22)	6.8 (0.27)	2.9 (0.11)	3.1 (0.12)	B6
VTP200GF	20.9 (0.82)	23.1 (0.91)	—	0.8 (0.03)	4.1 (0.16)	4.5 (0.18)	3.0 (0.11)	4.8 (0.19)	3.0 (0.11)	4.8 (0.19)	2.9 (0.11)	3.1 (0.12)	B3
VTP200UF	20.9 (0.82)	23.1 (0.91)	—	0.7 (0.03)	4.1 (0.16)	4.3 (0.17)	4.0 (0.16)	5.4 (0.21)	4.0 (0.16)	5.4 (0.21)	2.9 (0.11)	3.1 (0.12)	B6
VTP210GF	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	4.1 (0.16)	5.8 (0.23)	4.1 (0.16)	5.8 (0.23)	3.9 (0.15)	4.1 (0.16)	B3
VTP210LF	24.0 (0.94)	26.0 (1.02)	0.6 (0.02)	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	5.0 (0.20)	7.1 (0.28)	5.0 (0.20)	7.1 (0.28)	3.9 (0.15)	4.1 (0.16)	B3
VTP210SF	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	4.1 (0.16)	5.8 (0.23)	4.1 (0.16)	5.8 (0.23)	3.9 (0.15)	4.1 (0.16)	B4
VTP210SLF	29.0 (1.14)	32.0 (1.26)	0.6 (0.02)	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	3.5 (0.13)	5.8 (0.23)	12.5 (0.49)	14.5 (0.57)	3.9 (0.15)	4.1 (0.16)	B4
VTP210SLF-19.2/5.8	34.0 (1.33)	37.0 (1.46)	—	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	16.8 (0.66)	19.2 (0.76)	4.1 (0.16)	5.8 (0.23)	3.9 (0.15)	4.1 (0.16)	B4
VTP210SSF	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	4.1 (0.16)	5.8 (0.23)	4.1 (0.16)	5.8 (0.23)	3.9 (0.15)	4.1 (0.16)	B5
VTP210ULDF	22.8 (0.89)	25.2 (1.00)	—	0.8 (0.03)	4.9 (0.19)	5.1 (0.20)	7.8 (0.30)	9.2 (0.37)	2.9 (0.11)	4.1 (0.17)	2.9 (0.11)	3.1 (0.13)	B6
VTP240F	23.8 (0.93)	26.2 (1.03)	—	0.8 (0.03)	4.9 (0.19)	5.3 (0.21)	3.5 (0.13)	5.7 (0.23)	3.5 (0.13)	5.7 (0.23)	3.9 (0.15)	4.1 (0.16)	B3

Table B4 - Dimensions for Strap Battery Devices in Millimeters (Inches)

... Cont'd

Part Number	Dimension												Figure
	A Min.	A Max.	B Min.	B Max.	C Min.	C Max.	D Min.	D Max.	E Min.	E Max.	F Min.	F Max.	
110°C Typical Activation													
LTP													
LTP070F	19.9 (0.783)	22.1 (0.870)	0.7 (0.027)	1.2 (0.048)	4.9 (0.192)	5.2 (0.205)	5.5 (0.216)	7.5 (0.296)	5.5 (0.216)	7.5 (0.296)	3.9 (0.153)	4.1 (0.162)	B7
LTP070SF	19.9 (0.783)	22.1 (0.870)	0.7 (0.027)	1.2 (0.048)	4.9 (0.192)	5.2 (0.205)	5.5 (0.216)	7.5 (0.296)	5.5 (0.216)	7.5 (0.296)	3.9 (0.153)	4.1 (0.162)	—
LTP100F	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	—
LTP100SF	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	—
LTP100SLF	29.0 (1.14)	32.0 (1.26)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	3.5 (0.13)	5.5 (0.22)	12.5 (0.49)	14.5 (0.57)	3.9 (0.15)	4.1 (0.16)	—
LTP100SSF	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	—
LTP180F	24.0 (0.94)	26.0 (1.02)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	—
LTP180LF	35.5 (1.40)	37.5 (1.48)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	9.7 (0.38)	11.0 (0.44)	9.7 (0.38)	11.0 (0.44)	3.9 (0.15)	4.1 (0.16)	—
LTP180SF	24.0 (0.94)	26.0 (1.02)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	—
LTP190F	21.3 (0.84)	23.4 (0.92)	0.5 (0.02)	1.1 (0.04)	10.2 (0.40)	11.0 (0.43)	5.0 (0.20)	7.6 (0.30)	5.0 (0.20)	7.6 (0.30)	4.8 (0.19)	5.4 (0.21)	—
LTP260F	24.0 (0.94)	26.0 (1.02)	0.6 (0.02)	1.0 (0.04)	10.8 (0.43)	11.9 (0.47)	5.0 (0.20)	7.0 (0.28)	5.0 (0.20)	7.0 (0.28)	5.9 (0.23)	6.1 (0.24)	—
LTP300F	28.4 (1.12)	31.8 (1.25)	0.5 (0.02)	1.1 (0.04)	13.0 (0.51)	13.5 (0.53)	6.3 (0.25)	8.9 (0.35)	6.3 (0.25)	8.9 (0.35)	6.0 (0.24)	6.6 (0.26)	—
LTP340F	24.0 (0.94)	26.0 (1.02)	0.6 (0.02)	1.0 (0.04)	14.8 (0.58)	15.9 (0.63)	4.0 (0.16)	5.0 (0.20)	4.0 (0.16)	5.0 (0.20)	5.9 (0.23)	6.1 (0.24)	—
miniSMDE													
miniSMDE190F	11.15 (0.439)	11.51 (0.453)	0.33 (0.013)	0.53 (0.021)	4.83 (0.19)	5.33 (0.21)	0.51 (0.02)	1.02 (0.04)	— —	— —	— —	— —	B15
125°C Typical Activation													
LR4													
LR4-170UF	19.0 (0.75)	21.0 (0.83)	0.5 (0.02)	0.7 (0.03)	3.8 (0.15)	4.0 (0.16)	5.3 (0.21)	6.5 (0.26)	5.3 (0.21)	6.5 (0.26)	2.9 (0.11)	3.1 (0.12)	B12
LR4-190F	19.9 (0.78)	22.1 (0.87)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.5 (0.22)	5.5 (0.22)	7.5 (0.30)	5.5 (0.22)	7.5 (0.30)	3.9 (0.15)	4.1 (0.16)	B10
LR4-190SF	19.9 (0.78)	22.1 (0.87)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.5 (0.22)	5.5 (0.22)	7.5 (0.30)	5.5 (0.22)	7.5 (0.30)	3.9 (0.15)	4.1 (0.16)	B11
LR4-260F	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	B10
LR4-260SF	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	B11
LR4-380F	24.0 (0.94)	26.0 (1.02)	0.6 (0.02)	1.0 (0.04)	6.9 (0.27)	7.5 (0.30)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	4.9 (0.19)	5.1 (0.20)	B10
LR4-380XF	32.2 (1.27)	35.8 (1.41)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.5 (0.22)	5.5 (0.22)	7.5 (0.30)	5.5 (0.22)	7.5 (0.30)	3.9 (0.15)	4.1 (0.16)	B10
LR4-450F	24.0 (0.94)	26.0 (1.02)	0.6 (0.02)	1.0 (0.04)	9.9 (0.41)	10.5 (0.39)	5.3 (0.21)	6.7 (0.26)	5.3 (0.21)	6.7 (0.26)	5.9 (0.23)	6.1 (0.24)	B10
LR4-550F	35.0 (1.38)	37.0 (1.46)	0.6 (0.02)	1.0 (0.04)	6.9 (0.27)	7.5 (0.30)	5.3 (0.21)	6.7 (0.26)	5.3 (0.21)	6.7 (0.26)	4.9 (0.19)	5.1 (0.20)	B10
LR4-600F	24.0 (0.95)	26.0 (1.02)	0.6 (0.02)	1.0 (0.04)	13.9 (0.55)	14.5 (0.57)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	5.9 (0.23)	6.1 (0.24)	B10
LR4-600XF	40.5 (1.59)	42.7 (1.68)	0.6 (0.02)	1.0 (0.04)	6.9 (0.27)	7.5 (0.30)	5.2 (0.20)	6.8 (0.27)	5.2 (0.20)	6.8 (0.27)	4.9 (0.19)	5.1 (0.20)	B10
LR4-730F	27.1 (1.06)	29.1 (1.15)	0.6 (0.02)	1.0 (0.04)	13.9 (0.54)	14.5 (0.57)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	5.9 (0.23)	6.1 (0.24)	B10
LR4-880SF	62.8 (2.47)	65.2 (2.57)	0.6 (0.02)	1.0 (0.04)	7.9 (0.31)	8.5 (0.33)	10.0 (0.39)	12.0 (0.47)	10.0 (0.39)	12.0 (0.47)	5.9 (0.23)	6.1 (0.24)	B14
LR4-900F	45.4 (1.79)	47.6 (1.87)	0.9 (0.04)	1.3 (0.05)	7.9 (0.31)	8.5 (0.33)	4.6 (0.18)	6.2 (0.24)	4.6 (0.18)	6.2 (0.24)	5.9 (0.23)	6.1 (0.24)	B10
LR4-1300SSF	61.5 (0.42)	66.5 (2.62)	0.9 (0.04)	1.3 (0.05)	9.4 (0.37)	10.0 (0.39)	5.0 (0.20)	7.5 (0.30)	5.0 (0.20)	7.5 (0.30)	5.9 (0.23)	6.1 (0.24)	B14
LR4-1410F	58.0 (2.28)	60.0 (2.36)	0.9 (0.04)	1.3 (0.05)	13.4 (0.53)	14.0 (0.55)	4.2 (0.17)	5.8 (0.23)	4.2 (0.17)	5.8 (0.23)	5.9 (0.23)	6.1 (0.24)	B10
SRP													
SRP120F	19.9 (0.78)	22.1 (0.87)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	5.5 (0.22)	7.5 (0.30)	5.5 (0.22)	7.5 (0.30)	3.9 (0.15)	4.1 (0.16)	B7
SRP120LF	24.9 (0.98)	27.1 (1.07)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	5.5 (0.22)	7.5 (0.30)	10.5 (0.41)	12.5 (0.49)	3.9 (0.15)	4.1 (0.16)	B7
SRP120SF	19.9 (0.78)	22.1 (0.87)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	5.5 (0.22)	7.5 (0.30)	5.5 (0.22)	7.5 (0.30)	3.9 (0.15)	4.1 (0.16)	B13
SRP175F	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	B7



Table B4 - Dimensions for Strap Battery Devices in Millimeters (Inches)

... Cont'd

Part Number	Dimension												
	A		B		C		D		E		F		
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Figure
SRP													
SRP175LF	29.9 (1.18)	32.1 (1.26)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	5.5 (0.22)	7.5 (0.30)	10.5 (0.41)	12.5 (0.49)	3.9 (0.15)	4.1 (0.16)	B7
SRP175SF	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	B13
SRP175SSF	20.9 (0.82)	23.1 (0.91)	0.6 (0.02)	1.0 (0.04)	4.9 (0.19)	5.2 (0.20)	4.1 (0.16)	5.5 (0.22)	4.1 (0.16)	5.5 (0.22)	3.9 (0.15)	4.1 (0.16)	B14
SRP200F	21.3 (0.84)	23.4 (0.92)	0.5 (0.02)	1.1 (0.04)	10.2 (0.40)	11.0 (0.43)	5.0 (0.20)	7.6 (0.30)	5.0 (0.20)	7.6 (0.30)	4.8 (0.19)	5.4 (0.21)	B7
SRP350F	28.4 (1.12)	31.8 (1.25)	0.5 (0.02)	1.1 (0.04)	13.0 (0.53)	13.5 (0.51)	6.3 (0.25)	8.9 (0.35)	6.3 (0.25)	8.9 (0.35)	6.0 (0.24)	6.6 (0.26)	B7
SRP420F	30.6 (1.20)	32.4 (1.28)	0.5 (0.02)	1.1 (0.04)	12.9 (0.51)	13.6 (0.54)	5.0 (0.20)	7.5 (0.30)	5.0 (0.20)	7.5 (0.30)	6.0 (0.24)	6.7 (0.26)	B7

Figures B16-B22 - Typical Time-to-trip Curves at 20°C for Strap Battery Devices


VLR (data at 25°C)

A = VLR170F

B = VLR175F

C = VLR230F

Figure B16

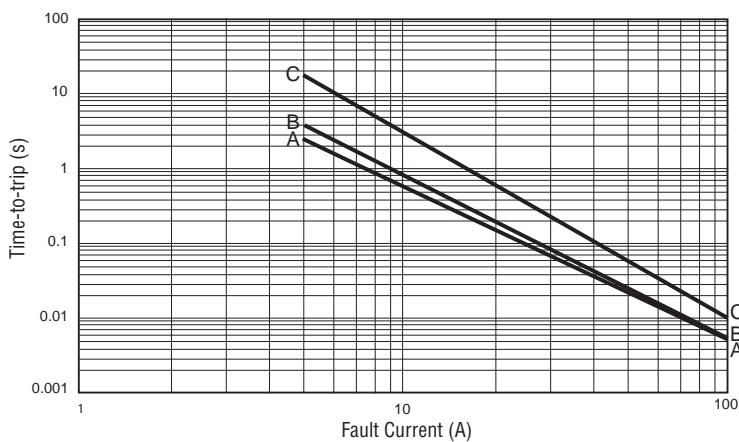


VLP (data at 25°C)

A = VLP210F

B = VLP220F

C = VLP270F

Figure B17

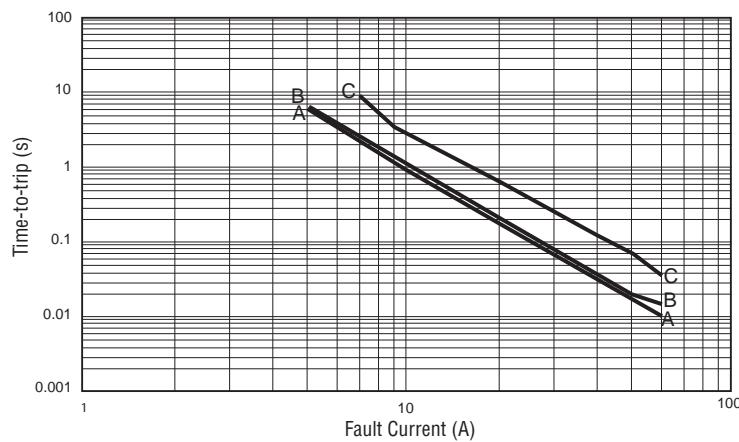


Figures B16-B22 - Typical Time-to-trip Curves at 20°C for Strap Battery Devices

... Cont'd

VTP (data at 25°C)

- A = VTP170F
- B = VTP175F
- C = VTP200F
- D = VTP210GF
- E = VTP240F


Figure B18

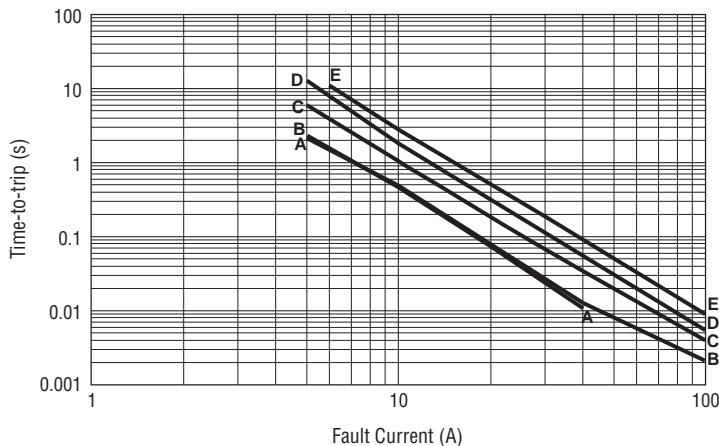

LTP

- A = LTP070F
- B = LTP100F
- C = LTP180F
- D = LTP190F
- E = LTP260F
- F = LTP300F
- G = LTP340F


Figure B19

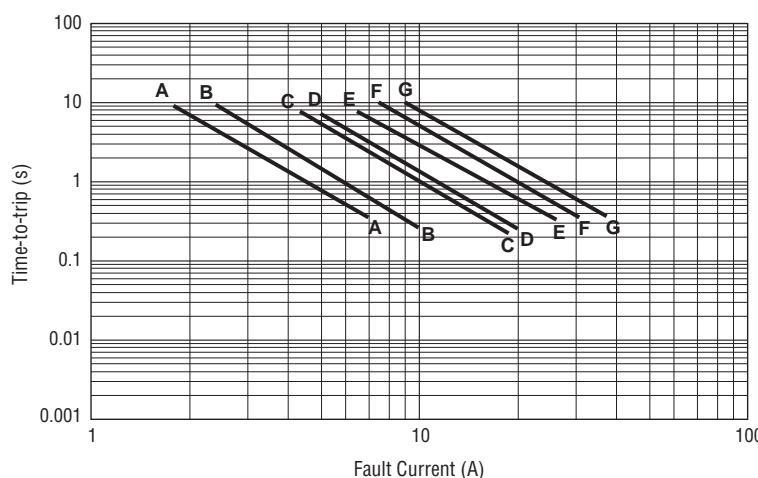

LR4

- A = LR4-170UF
- B = LR4-190F
- C = LR4-260F
- D = LR4-380F
- E = LR4-450F
- F = LR4-550F
- G = LR4-600F
- H = LR4-730F
- I = LR4-880F
- J = LR4-900F
- K = LR4-1300F
- L = LR4-1410F

Figure B20

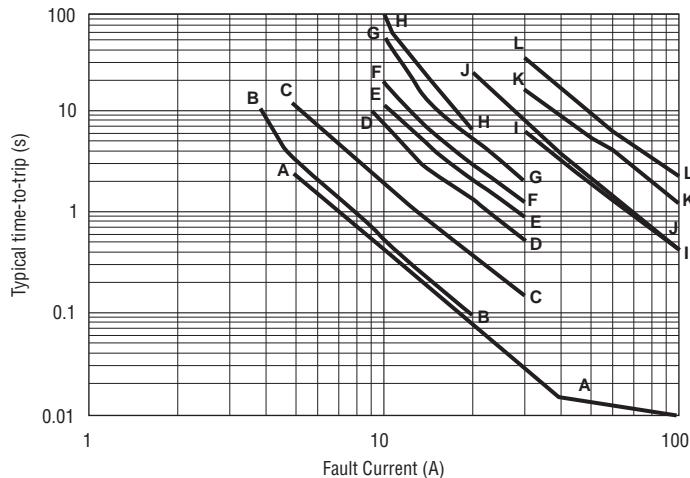

Figures B16-B22 - Typical Time-to-trip Curves at 20°C for Strap Battery Devices

... Cont'd

SRP

A = SRP120F


B = SRP175F

C = SRP200F

D = SRP350F

E = SRP420F

Figure B21

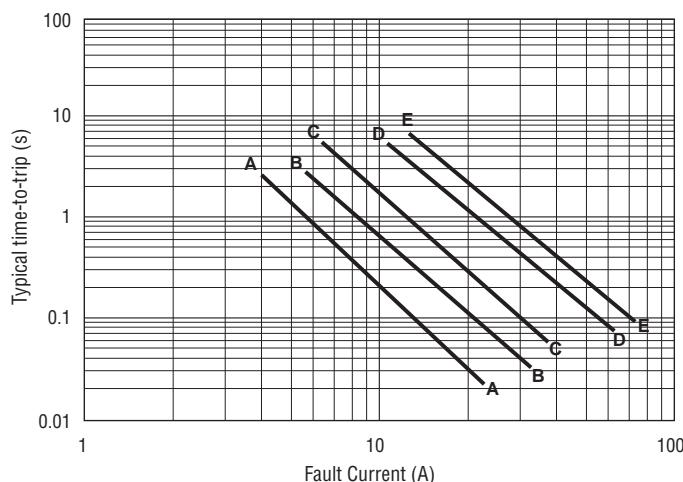

miniSMDE

A = miniSMDE190F

Figure B22

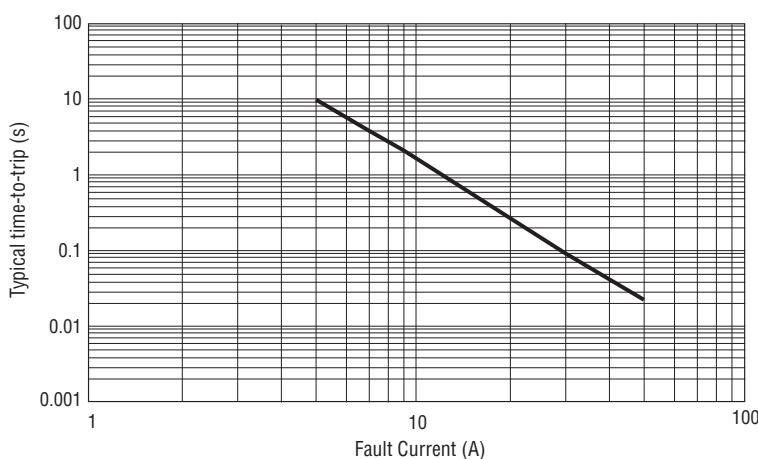


Table B5 - Physical Characteristics and Environmental Specifications for Strap Battery Devices

VLR Physical Characteristics

Lead material	0.125mm nominal thickness, quarter-hard nickel
Tape material	Polyester

VLR Environmental Specifications

Test	Conditions	Resistance Change
Passive aging	-40°C, 1000 hours	±5%
	60°C, 1000 hours	±20%
Humidity aging	60°C/95% RH, 1000 hours	±30%
Thermal shock	85°C, -40°C (10 times)	±5%
Vibration	MIL-STD-883D, Method 2026	No change

Table B5 - Physical Characteristics and Environmental Specifications for Strap Battery Devices ... Cont'd

**VLP and VTP
Physical Characteristics**

Lead material	0.125mm nominal thickness, quarter-hard nickel
Tape material	Polyester

**VLP and VTP
Environmental Specifications**

Test	Conditions	Resistance Change
Passive aging	-40°C, 1000 hours	±5%
	60°C, 1000 hours	±10%
Humidity aging	60°C/95% RH, 1000 hours	±10%
Thermal shock	85°C, -40°C (10 times)	±5%
Vibration	MIL-STD-883D, Method 2026	No change

**LTP
Physical Characteristics**

Lead material	0.125mm nominal thickness, quarter-hard nickel
Tape material	Polyester

**LTP
Environmental Specifications**

Test	Conditions	Resistance Change
Passive aging	70°C, 1000 hours	±10%
Humidity aging	85°C/85% RH, 7 days	±15%
Vibration	MIL-STD-883C, Test Condition A	No change

**LR4
Physical Characteristics**

Lead material	0.125mm nominal thickness, quarter-hard nickel
Tape material	Polyester

**LR4
Environmental Specifications**

Test	Conditions	Resistance Change
Passive aging	70°C, 1000 hours	±10%
Humidity aging	85°C/85% RH, 7 days	±5%
Vibration	MIL-STD-883D, Method 2026	No change

**SRP
Physical Characteristics**

Lead material	0.125mm nominal thickness, quarter-hard nickel
Tape material	Polyester

**SRP
Environmental Specifications**

Test	Conditions	Resistance Change
Passive aging	70°C, 1000 hours	±10%
Humidity aging	85°C/85% RH, 7 days	±5%
Vibration	MIL-STD-883C, Test Condition A	No change

Table B5 - Physical Characteristics and Environmental Specifications for Strap Battery Devices ... Cont'd

**miniSMDE
Physical Characteristics**

Termination pad materials	Solder-plated copper
Termination pad solderability	Meets EIA specification RS186-9E, ANSI/J-STD-002 Category 3

**miniSMDE
Environmental Specifications**

Test	Conditions	Resistance Change
Passive aging	60°C, 1000 hours	±5% typical
	85°C, 1000 hours	±5% typical
Humidity aging	85°C/85% RH, 100 days	±15% typical
Thermal shock	85°C, -40°C (20 times)	-33% typical
	125°C, -55°C (10 times)	-33% typical
Vibration	MIL-STD-883D, Method 2026	No change
Reflow conditions	260°C for 10-20 seconds	Less than R
Tape and reel specifications	Per EIA 481-1	N/A

Note: Storage conditions: 40°C max., 70% RH max.; devices should remain in original sealed bags prior to use. Devices may not meet specified values if these storage conditions are exceeded.

Table B6 - Packaging and Marking Information/Agency Recognition for Strap Battery Devices

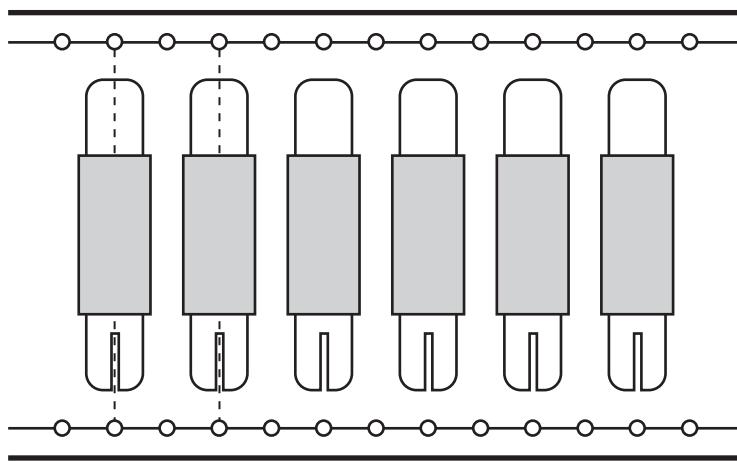
Part Number	Bag Quantity	Tape & Reel Quantity	Standard Package	Part Marking	Agency Recognition
85°C Typical Activation-VLR					
VLR170F	1,000	—	10,000	R17	UL, CSA, TÜV
VLR170LF	1,000	—	10,000	R17	UL, CSA, TÜV
VLR170UF	1,000	—	10,000	—	UL, CSA, TÜV
VLR175F	1,000	—	10,000	R1X	UL, CSA, TÜV
VLR175LF	1,000	—	10,000	R1X	UL, CSA, TÜV
VLR175UF	1,000	—	10,000	—	UL, CSA, TÜV
VLR230F	1,000	—	10,000	R23	UL, CSA, TÜV
VLR230F-C36	1,000	—	10,000	R23	UL, CSA, TÜV
VLR230SF	1,000	—	10,000	R23	UL, CSA, TÜV
VLR230SUF	1,000	—	10,000	—	UL, CSA, TÜV
VLR230UF	1,000	—	10,000	—	UL, CSA, TÜV
90°C Typical Activation-VLP					
VLP210F	1,000	—	10,000	W21	UL, CSA, TÜV
VLP220F	1,000	—	10,000	W22	UL, CSA, TÜV
VLP270F	1,000	—	10,000	W27	UL, CSA, TÜV
90°C Typical Activation-VTP					
VTP110F	1,000	—	10,000	—	UL, CSA, TÜV
VTP170F	1,000	—	10,000	V17	UL, CSA, TÜV
VTP170SSF	1,000	—	10,000	V17	UL, CSA, TÜV
VTP170XF	1,000	—	10,000	V17	UL, CSA, TÜV
VTP170XSF	1,000	—	10,000	V17	UL, CSA, TÜV
VTP175F	1,000	—	10,000	V1X	UL, CSA, TÜV
VTP175UF	1,000	—	10,000	—	UL, CSA, TÜV
VTP175LF	1,000	—	10,000	V1X	UL, CSA, TÜV
VTP200GF	1,000	—	10,000	V20	UL, CSA, TÜV
VTP200UF	1,000	—	10,000	—	UL, CSA, TÜV
VTP210GF	1,000	—	10,000	V21	UL, CSA, TÜV
VTP210GUF	1,000	—	10,000	—	UL, CSA, TÜV
VTP210GF-2	—	4,000	20,000	V21	UL, CSA, TÜV
VTP210LF	1,000	—	10,000	V21	UL, CSA, TÜV
VTP210LF-2	—	4,000	20,000	V21	UL, CSA, TÜV
VTP210SF	1,000	—	10,000	V21	UL, CSA, TÜV
VTP210SF-2	—	4,000	20,000	V21	UL, CSA, TÜV
VTP210SLF	1,000	—	10,000	V21	UL, CSA, TÜV
VTP210SLF-2	—	4,000	20,000	V21	UL, CSA, TÜV
VTP210SLF-19.2/5.8	1,000	—	10,000	V21	UL, CSA, TÜV

Table B6 - Packaging and Marking Information/Agency Recognition for Strap Battery Devices

... Cont'd

Part Number	Bag Quantity	Tape & Reel Quantity	Standard Package	Part Marking	Agency Recognition
90°C Typical Activation–VTP					
VTP210SLF-19.2/5.8-2	—	4,000	20,000	V21	UL, CSA, TÜV
VTP210SSF	1,000	—	10,000	V21	UL, CSA, TÜV
VTP210ULDF	1,000	—	10,000	—	UL, CSA, TÜV
VTP240F	1,000	—	10,000	V24	UL, CSA, TÜV
110°C Typical Activation–LTP, miniSMDE					
LTP070F	2,000	—	10,000	L07	UL, CSA, TÜV
LTP070SF	2,000	—	10,000	L07	UL, CSA, TÜV
LTP100F	2,000	—	10,000	L10	UL, CSA, TÜV
LTP100SF	2,000	—	10,000	L10	UL, CSA, TÜV
LTP100SF-2	—	4,000	20,000	L10	UL, CSA, TÜV
LTP100SLF	2,000	—	40,000	L10	UL, CSA, TÜV
LTP100SLF-2	—	4,000	20,000	L10	UL, CSA, TÜV
LTP100SSF	2,000	—	10,000	L10	UL, CSA, TÜV
LTP180F	2,000	—	10,000	L18	UL, CSA, TÜV
LTP180LF	500	—	10,000	L18	UL, CSA, TÜV
LTP180LF-2	—	4,000	20,000	L18	UL, CSA, TÜV
LTP180SF	2,000	—	10,000	L18	UL, CSA, TÜV
LTP180SF-2	—	4,000	20,000	L18	UL, CSA, TÜV
LTP190F	500	—	10,000	L19	UL, CSA, TÜV
LTP260F	1,000	—	10,000	L26	UL, CSA, TÜV
LTP300F	500	—	10,000	L30	UL, CSA, TÜV
LTP340F	500	—	10,000	L34	UL, CSA, TÜV
miniSMDE190-2F	—	5,000	5,000	19	UL, CSA, TÜV
125°C Typical Activation–LR4, SRP					
LR4-170UF	2,000	—	10,000	NA	UL, CSA, TÜV
LR4-190F	2,000	—	10,000	E19	UL, CSA, TÜV
LR4-190SF	2,000	—	10,000	E19	UL, CSA, TÜV
LR4-190SF-2	—	4,000	20,000	E19	UL, CSA, TÜV
LR4-260F	1,000	—	10,000	E26	UL, CSA, TÜV
LR4-260SF	1,000	—	10,000	E26	UL, CSA, TÜV
LR4-380F	1,000	—	10,000	E38	UL, CSA, TÜV
LR4-380XF	1,000	—	10,000	E3X	UL, CSA, TÜV
LR4-450F	1,000	—	10,000	E45	UL, CSA, TÜV
LR4-550F	1,000	—	10,000	E55	UL, CSA, TÜV
LR4-600F	1,000	—	10,000	E60	UL, CSA, TÜV
LR4-600XF	1,000	—	10,000	E60	UL, CSA, TÜV
LR4-730F	1,000	—	10,000	E73	UL, CSA, TÜV
LR4-73XF	500	—	10,000	E7X	UL, CSA, TÜV
LR4-880SSF	250	—	8,000	E88	(UL, CSA, TÜV pending)
LR4-900F	500	—	10,000	E90	UL, CSA, TÜV
LR4-1300SSF	250	—	10,000	EX3	UL, CSA, TÜV
LR4-1410F	250	—	10,000	E141	UL, CSA, TÜV
SRP120F	2,000	—	10,000	120	UL, CSA, TÜV
SRP120LF	1,000	—	10,000	120	UL, CSA, TÜV
SRP120SF	2,000	—	10,000	120	UL, CSA, TÜV
SRP175F	2,000	—	10,000	175	UL, CSA, TÜV
SRP175F-2	—	4,000	20,000	175	UL, CSA, TÜV
SRP175LF	1,000	—	10,000	175	UL, CSA, TÜV
SRP175SF	2,000	—	10,000	175	UL, CSA, TÜV
SRP175SSF	2,000	—	10,000	175	UL, CSA, TÜV
SRP200F	500	—	10,000	200	UL, CSA, TÜV
SRP200F-2	—	4,000	20,000	200	UL, CSA, TÜV
SRP350F	500	—	10,000	350	UL, CSA, TÜV
SRP420F	500	—	10,000	420	UL, CSA, TÜV



Figure B23 - Typical Taped Component Layout for Strap Battery Products

Note: Contact your local Raychem Circuit Protection representative for dimensions and availability.


Installation Guidelines for the Strap Family

- Polymeric PTC devices operate by thermal expansion of the conductive polymer. If devices are placed under pressure or installed in spaces that would prevent thermal expansion, they may not properly protect against fault conditions. Designs must be selected in such a manner that adequate space is maintained over the life of the product.
- Twisting, bending, or placing the Polymeric PTC device in tension will decrease the ability of the device to protect against electrical faults. No residual force should remain on the device after installation. Mechanical damage to Polymeric PTC chip may affect device performance and should be avoided.
- Chemical contamination of Polymeric PTC devices should be avoided. Certain greases, solvents, hydraulic fluids, fuels, industrial cleaning agents, volatile components of adhesives, silicones, and electrolytes can have an adverse effect on device performance.
- Polymeric PTC strap devices are designed to be resistance welded to battery cells or to pack interconnect straps, yet some precautions must be taken when doing so. In order for the Polymeric PTC device to exhibit its specified performance, weld placement should be a minimum of 2mm from the edge of the Polymeric PTC chip, weld splatter must not touch the Polymeric PTC chip, and welding conditions must not heat the Polymeric PTC device above its maximum operating temperature.
- Polymeric PTC strap devices are not designed for applications where reflow onto flex circuits or rigid circuit boards is required.
- The polyester tape on PolySwitch strap devices is intended for marking and identification purposes only, not for electrical insulation.

Agency Recognition for Strap Battery Devices

UL	File # E74889
CSA	File # 78165C
TÜV	Certificate number available on request

Part Numbering System for Strap Battery Devices

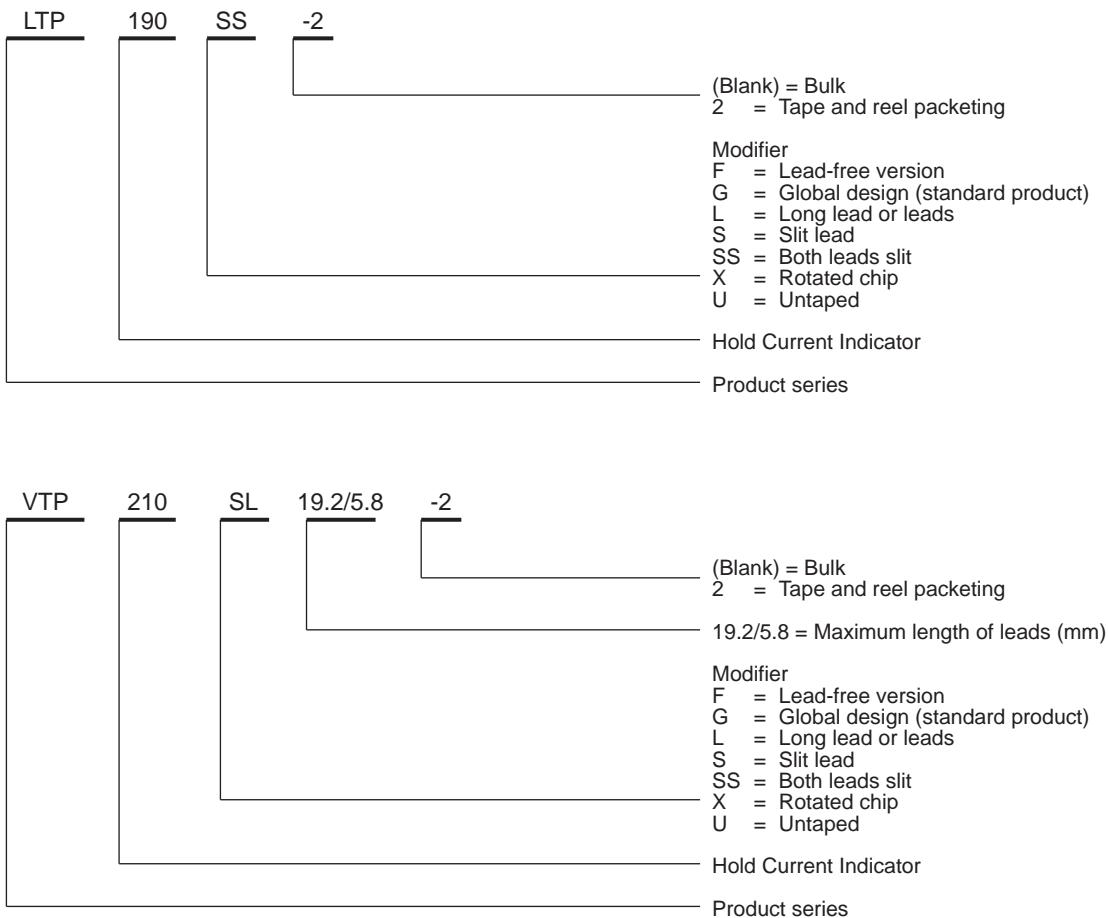

WARNING:

- Operation beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- The devices are intended for protection against occasional overcurrent or overtemperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the performance of the devices.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- Operation in circuit with a large inductance can generate a circuit voltage ($L \frac{di}{dt}$) above the rated voltage of the PolySwitch resettable device.