

**Specification Status: Released**

**Electrical Rating**

**Voltage: 24V MAX**  
**Current: 100A MAX**

Chip Size: 10.5 X 8.1mm


Leads: Nickel 1/4H  
0.125mm nominal thickness

Tape: Polyester (Yellow)  
10.2mm Width

Solder: Lead-free

Marking: (Color: Green)

- Manufacturer's Mark
- XX L19 — Part Identification
- — Lot Identification

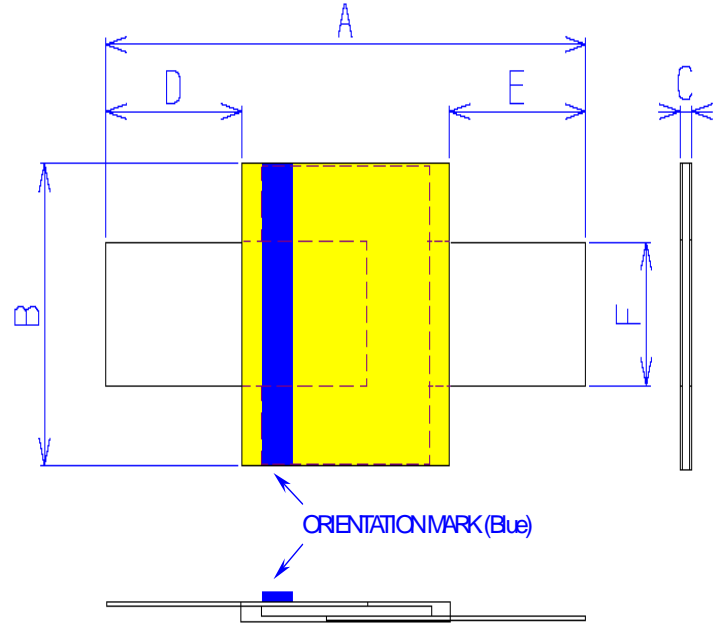

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F		G	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
Mm:	21.3	23.4	10.2	11.0	0.5	1.1	5.0	7.6	5.0	7.6	4.8	5.4		
In*:	(0.84)	(0.92)	(0.40)	(0.43)	(0.02)	(0.04)	(0.20)	(0.30)	(0.20)	(0.30)	(0.19)	(0.21)		

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.**

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP		REFERENCE RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE		TRIPPED-STATE POWER DISSIPATION		
	AMPS 20°C HOLD		AMPS AT 0°C		AMPS AT 20°C		AMPS AT 60°C		AMPS AT 80°C		SECONDS AT 20°C, 10.0A TYP		OHMS AT 20°C		WATTS AT 20°C, 15V TYP		
	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MIN	MAX	MIN	MAX	TYP	MAX	
	1.9	2.4	5.0	1.9	4.2	1.1	2.5	0.5	1.3	1.4	3.0	0.030	0.057	0.030	0.100	1.5	1.9

Agency Recognitions:  
Reference Documents:  
Precedence:  
Effectivity:  
CAUTION:

UL, TUV, CSA  
PS300  
This specification takes precedence over documents referenced herein.  
Reference documents shall be the issue in effect on the date of invitation for bid.  
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame

Materials Information:  
**ROHS Compliant**

**ELV Compliant**

**Pb-Free**

