

Specification Status: Released

Electrical Rating

Voltage: 24V MAX
Current: 100A MAX

Chip Size: 11 X 11mm

Leads: Nickel 1/4H
0.125mm nominal thickness

Tape: Polyester (Yellow)
13.0mm nominal Width

Solder: Lead-free

Marking: (Color: Green)

- Manufacturer's Mark
- ⊗ L26 — Part Identification
- □ □ □ — Lot Identification

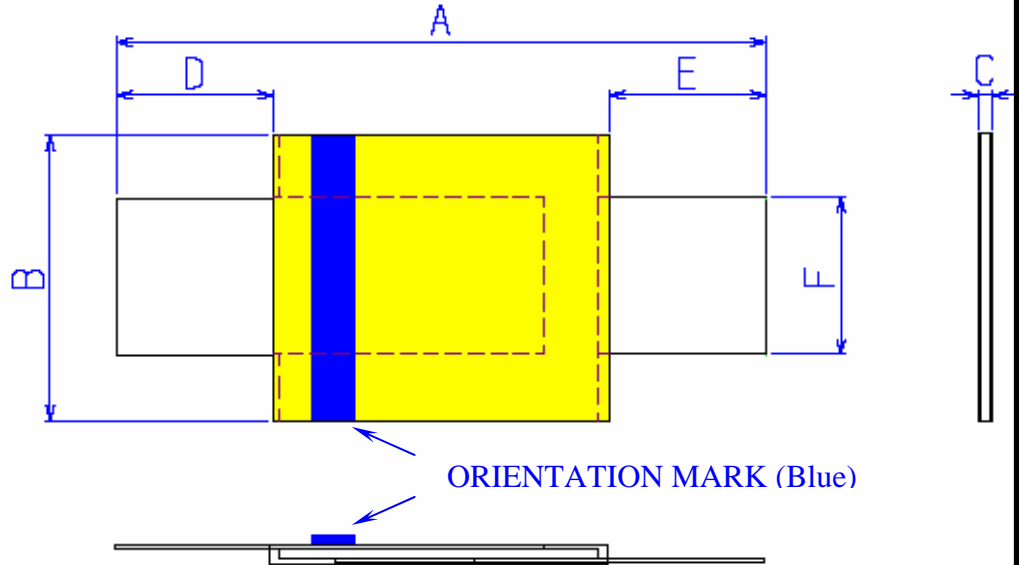


TABLE I. DIMENSIONS:

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
Mm:	24.0	26.0	10.8	11.9	0.6	1.0	5.0	7.0	5.0	7.0	5.9	6.1
In*:	(0.94)	(1.02)	(0.43)	(0.47)	(0.02)	(0.04)	(0.20)	(0.28)	(0.20)	(0.28)	(0.23)	(0.24)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips Model BU-75K.

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION				
	AMPS 20°C HOLD		AMPS AT 0°C AT 20°C		AMPS AT 60°C AT 20°C		AMPS AT -20°C AT 20°C						SECONDS AT 20°C, 13.0A TYP MAX		OHMS AT 20°C MIN MAX	
2.6	3.1	6.2	2.6	5.2	1.4	2.8	--	--	--	5	0.025	0.042	0.025	0.076	--	2.3

Agency Recognitions:
Reference Documents:
Precedence:
Effectivity:
CAUTION:
Materials Information:

UL, TUV, CSA
PS300

This specification takes precedence over documents referenced herein.

Reference documents shall be the issue in effect on the date of invitation for bid.

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame

ROHS Compliant

Directive 2002/95/EC
Compliant

ELV Compliant

Directive 2000/53/EC
Compliant

Pb-Free

