




**Specification Status: Released**


**Electrical Rating**

**Voltage: 16V MAX**  
**Current: 100A MAX**

Insulating Material:  
Cured, Flame Retardant Epoxy Polymer  
meets UL94 V-0 Requirements

Lead Material:  
20 AWG Tin Plated Copper

Marking:  
 Manufacturer's Mark and Voltage  
 16  
 GF1000 — Part Identification  
 — Lot Identification (can be on back)

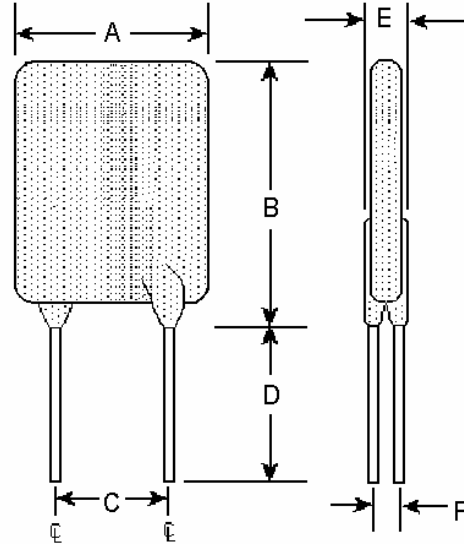

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
mm:	15.5	16.5	21.1	25.2	4.3	5.8	7.6	--	2.0	3.0	1.2
in*:	(0.61)	(0.65)	(0.83)	(0.99)	(0.17)	(0.23)	(0.30)	--	(0.08)	(0.12)	(0.05)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	R <sub>1</sub> MAX 1 HR. POST TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPS AT 25°C HOLD	AMPS AT 25°C HOLD	AMPS AT 25°C TRIP	OHMS AT 25°C		SECONDS AT 25°C, 50.0 A MAX	OHMS AT 25°C MAX	WATTS AT 25°C TYP
			MIN	MAX			
10.0	10.0	17.0	0.0040	0.0070	6.0	0.0102	3.6

Agency Recognitions: UL, CSA, TUV.  
 Reference Documents: PS300  
 Precedence: This specification takes precedence over documents referenced herein.  
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.  
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

ROHS Compliant      ELV Compliant      Pb-Free

