

**Specification Status: Released**

**Electrical Rating**

**Voltage: 16V MAX**  
**Current: 100A MAX**

**Insulating Material:**


Cured, Flame Retardant Epoxy Polymer  
 meets UL94 V-0 Requirements

**Lead Material:**

20 AWG Tin Plated Copper  
 (0.81mm [0.032] nom. diameter)

**Marking:**

- Raychem Logo and Voltage
- ⊗ 16 — Part Identification
- GF600 — Part Identification
- — Lot Identification (can be on back)

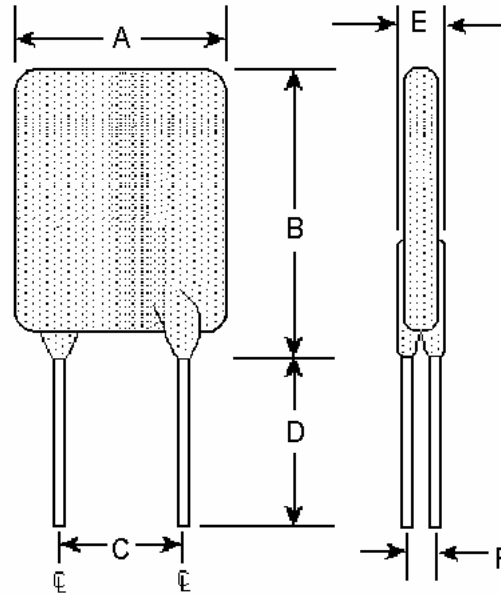

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
mm:	9.7	10.7	12.2	17.1	4.3	5.8	25.4	-	2.0	3.0	1.2
in*:	(0.38)	(0.42)	(0.48)	(0.67)	(0.17)	(0.23)	(1.0)	-	(0.08)	(0.12)	(0.05)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	R <sub>1</sub> MAX 1 HR. POST TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPS AT 25°C HOLD	AMPS AT 25°C HOLD	AMPS AT 25°C TRIP	OHMS AT 25°C		SECONDS AT 25°C, 30A MAX	OHMS AT 25°C MAX	WATTS AT 25°C TYP
			MIN	MAX			
6.0	6.0	10.2	0.0100	0.0190	3.3	0.0280	2.8

Agency Recognitions:

UL, CSA, TUV

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC  
 Compliant

Directive 2000/53/EC  
 Compliant

