

Tyco / Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: RUSBF110

DOCUMENT: SCD 25243
 PCN: F45901
 REV LETTER: B
 REV DATE: NOVEMBER 29, 2004
 PAGE NO.: 1 OF 1



Specification Status: RELEASED

Electrical Rating
Voltage: 16V_{DC} MAX
Current: 40A MAX

Insulating Material:
 Cured, Flame Retardant Epoxy Polymer meets
 UL 94 V-O Requirements

Lead Material:
 24 AWG Tin Plated Copper Clad Steel

Marking:

-  Raychem Logo
- RF110 — Part Identification
-  Lot Identification (can be on back)

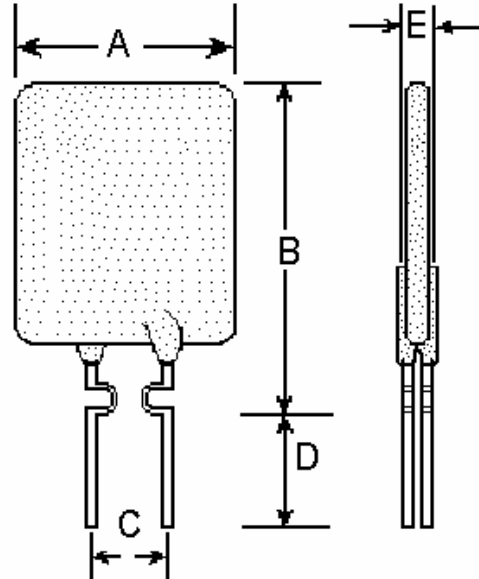


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.4	--	14.2	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.29)	--	(0.56)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS :

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TIME TO TRIP @ 8A	TRIPPED-STATE POWER DISSIPATION
	AMPERS AT 20°C HOLD	AMPERES AT 20°C HOLD TRIP	OHMS AT 20°C MIN TYP		OHMS AT 20°C MAX	SECONDS AT 20°C	WATTS AT 20°C
1.10	1.10	2.20	0.05	0.08	0.14	2.3	0.7

Agency Recognitions: UL, CSA, TUV recognized.
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

