

**Specification Status: Released**

**Electrical Rating**

**Voltage: 72V MAX**  
**Current: 40A MAX**

**Insulating Material:**


Cured, Flame Retardant Epoxy Polymer  
 meets UL94 V-0 Requirements

**Lead Material:**

20 AWG Tin Plated Copper

**Marking:**

- Raychem Logo and Voltage
- ⊗ 72
- XF185 — Part Identification
- — Lot Identification (can be on back)

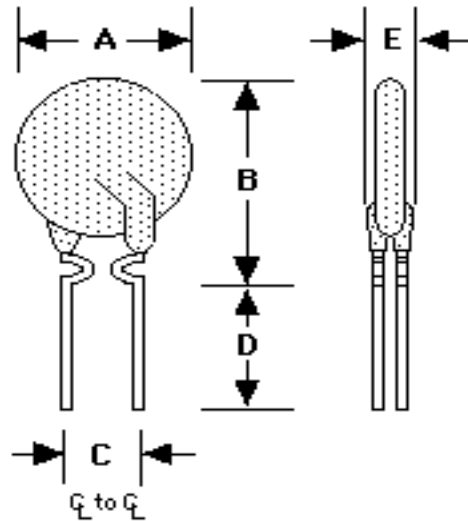

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	16.76	--	23.0	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.660)	--	(0.91)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS :**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPERES AT 20°C HOLD	AMPERES AT 20°C HOLD	AMPERES AT 20°C TRIP	OHMS AT 20°C MIN	OHMS AT 20°C MAX	SECONDS AT 20°C, 9.25A MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
1.85	1.85	3.70	0.08	0.12	12.6	0.19	2.1

**Agency Recognitions:**

UL, CSA and TUV

**Reference Documents:**

Approved by UL as a current limiting impedance, per the 1996 NEC, Tables 11 (c) and 11 (b). PS300

**Precedence:**

This specification takes precedence over documents referenced herein.

**Effectivity:**

Reference documents shall be the issue in effect on the date of invitation for bid.

**CAUTION:**

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

**ROHS Compliant**

**ELV Compliant**

**Pb-Free**

Directive 2002/95/EC Compliant

Directive 2000/53/EC Compliant

