

Specification Status: Released

Electrical Rating

Voltage: 15V MAX
Current: 100A MAX

Chip Size: 5 X 12mm

Leads: Nickel 1/4H
 0.125mm nominal thickness


Tape: Polyester (White)
 13mm Width

Solder: Lead-free

Lot Marking Ink Color (Green)

Marking:

- Manufacturer's Mark
- ✕ 175 — Part Identification
- □ □ □ — Lot Identification

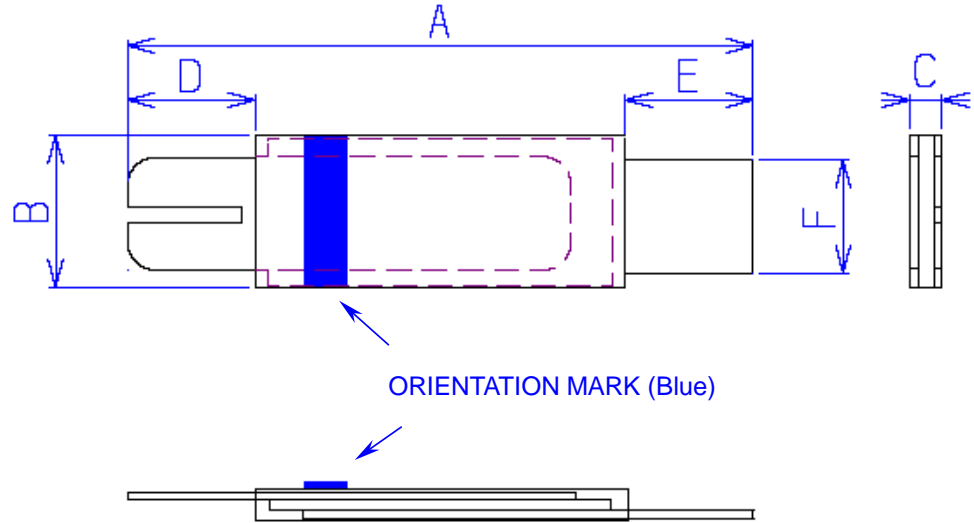

ORIENTATION MARK (Blue)

TABLE I. DIMENSIONS:

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
Mm:	20.9	23.1	4.9	5.2	0.6	1.0	4.1	5.5	4.1	5.5	3.9	4.1
In*:	(0.82)	(0.91)	(0.19)	(0.21)	(0.02)	(0.04)	(0.16)	(0.22)	(0.16)	(0.22)	(0.15)	(0.16)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION				
	AMPS 20°C HOLD		AMPS AT 0°C AT 20°C		AMPS AT 60°C AT 20°C		AMPS AT --°C AT 20°C						SECONDS AT 20°C, 8.75A TYP MAX		OHMS AT 20°C MIN MAX	
1.75	2.0	4.4	1.75	3.8	1.2	2.7	---	---	---	5	0.050	0.090	0.050	0.120	---	1.5

Agency Recognitions: UL, TUV, CSA
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame

Tyco / Electronics
Raychem Circuit Protection
308 Constitution Drive
Menlo Park, CA 94025-1164
Phone: 800-227-4856
Fax: 800-227-4866

PolySwitch®
PTC Devices
Overcurrent Protection Device

PRODUCT: SRP175SF

DOCUMENT: SCD26024
PCN: C29571
REV LETTER:A
REV DATE: JANUARY 12, 2005
PAGE NO.: 2 OF 1
