

**Specification Status: RELEASED**

**Max Electrical Rating at 20°C**


Operating Voltage: **60V<sub>DC</sub>**  
Interrupt Current: **3A<sub>RMS</sub>**

Fault Voltage: **600V<sub>RMS</sub>**

**Terminal Material:** Tin plated brass  
**Case Material:** 1000 V Dielectric rating

**Marking:**

- \_\_\_\_\_ Raychem Logo
- XX T20 \_\_\_\_\_ Part Identification
- \_\_\_\_\_ Lot Identification

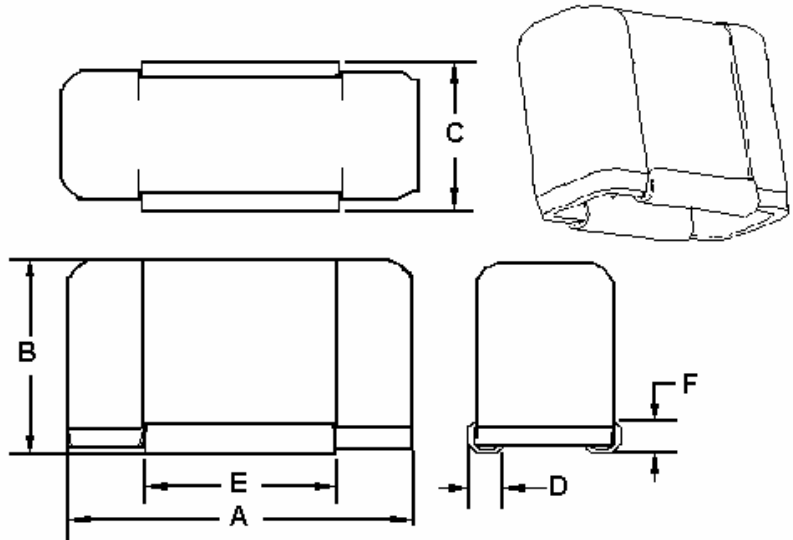

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	18.29	19.43	11.56	12.32	7.24	8.26	1.65	2.41	9.91	10.41	1.52	2.29
in*:	(0.720)	(0.765)	(0.455)	(0.485)	(0.285)	(0.325)	(0.065)	(0.095)	(0.390)	(0.410)	(0.060)	(0.090)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):**

IHOLD (A)		RESISTANCE (Ω)				TIME TO TRIP(s)	OPERATING Temperature (°C)		Power Dissipation
20°C	70°C	R MIN	R MAX	R <sub>1</sub> Inst*	R <sub>1</sub> MAX**	@ 1A TYP	MIN	MAX	Watts, Typical
0.200	0.110	4.0	7.5	13.5	13.5	12	-40	85	2.5

\*Post Reflow Resistance, measured after one hour.  
\*\*Maximum device resistance at 20°C measured 1 hour post trip.

Resistance Matched 0.5 Ohm

- Agency Recognitions: CSA, UL Recognition file #E74889
- Reference Documents: PS300
- Precedence: This specification takes precedence over documents referenced herein.
- Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
- CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

ROHS Compliant      ELV Compliant      Pb-Free

