

**Specification Status: Released**

**Maximum Electrical Rating**

**Operating Voltage: 16Vdc**  
**Interrupt Current: 100A**

Chip Size: 2.8 X 9.6mm


Leads: Nickel 1/2H  
0.125mm nominal thickness

Tape: None

Solder: Lead-free

Marking:

□□□□ — Lot Identification

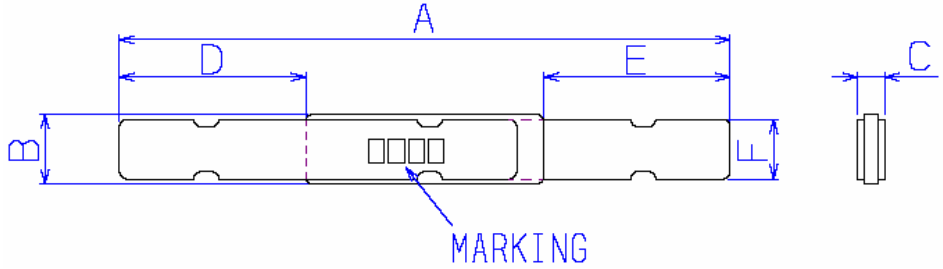

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	23.6	25.6	2.7	2.9	---	0.7	7.0	8.0	7.0	8.0	2.3	2.5
in*:	(0.93)	(1.01)	(0.11)	(0.11)	--	(0.03)	(0.28)	(0.31)	(0.28)	(0.31)	(0.09)	(0.10)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.**

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION		
	AMPS 25°C HOLD	AMPS AT 0°C HOLD	AMPS AT 25°C TRIP	AMPS AT 60°C HOLD	AMPS AT 60°C TRIP	AMPS AT -20°C HOLD	AMPS AT -20°C TRIP	AMPS AT -20°C TRIP						
1.1	1.4	3.4	1.1	2.7	0.7	1.7	---	---	5	0.038	0.070	0.038	0.140	1.3

Agency Recognitions:  
Reference Documents:  
Precedence:  
Effectivity:  
CAUTION:

UL, TUV, CSA  
PS300  
This specification takes precedence over documents referenced herein.  
Reference documents shall be the issue in effect on the date of invitation for bid.  
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information:

**ROHS Compliant**

**ELV Compliant**

**Pb-Free**

Directive 2000/53/EC  
Compliant

Directive 2002/95/EC  
Compliant

