

# PESDxU1UT series

Ultra low capacitance ESD protection diode in SOT23 package

Rev. 01 — 11 May 2005

Product data sheet

## 1. Product profile

### 1.1 General description

Ultra low capacitance ElectroStatic Discharge (ESD) protection diode in a SOT23 (TO-236AB) small SMD plastic package designed to protect one high-speed data line from the damage caused by ESD and other transients.

### 1.2 Features

- Unidirectional ESD protection of one line
- Ultra low diode capacitance:  $C_d = 0.6$  pF
- Max. peak pulse power:  $P_{PP}$  up to 200 W
- Low clamping voltage
- ESD protection > 23 kV
- IEC 61000-4-2; level 4 (ESD)
- IEC 61000-4-5; (surge)

### 1.3 Applications

- 10/100/1000 Ethernet
- FireWire
- Communication systems
- Local Area Network (LAN) equipment
- Computers and peripherals
- High-speed datalines

### 1.4 Quick reference data

Table 1: Quick reference data



Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{RWM}$	reverse stand-off voltage					
	PESD3V3U1UT		-	-	3.3	V
	PESD5V0U1UT		-	-	5.0	V
	PESD12VU1UT		-	-	12	V
	PESD15VU1UT		-	-	15	V
	PESD24VU1UT		-	-	24	V
$C_d$	diode capacitance	$f = 1$ MHz; $V_R = 0$ V <a href="#">[1]</a>	-	0.6	1.5	pF

[1] Measured from pin 1 to 2

# PHILIPS

## 2. Pinning information

Table 2: Pinning

Pin	Description	Simplified outline	Symbol
1	cathode ESD protection diode		 006aaa441
2	cathode compensation diode		
3	common anode		

## 3. Ordering information

Table 3: Ordering information

Type number	Package		
	Name	Description	Version
PESD3V3U1UT	-	plastic surface mounted package; 3 leads	SOT23
PESD5V0U1UT			
PESD12VU1UT			
PESD15VU1UT			
PESD24VU1UT			

## 4. Marking

Table 4: Marking codes

Type number	Marking code <sup>[1]</sup>
PESD3V3U1UT	*AP
PESD5V0U1UT	*AQ
PESD12VU1UT	*AR
PESD15VU1UT	*AS
PESD24VU1UT	*AT

- [1] \* = -: made in Hong Kong  
 \* = p: made in Hong Kong  
 \* = t: made in Malaysia  
 \* = W: made in China

## 5. Limiting values

**Table 5: Limiting values**

*In accordance with the Absolute Maximum Rating System (IEC 60134).*

Symbol	Parameter	Conditions	Min	Max	Unit
P <sub>PP</sub>	peak pulse power	8/20 $\mu$ s	[1]		
	PESD3V3U1UT		-	80	W
	PESD5V0U1UT		-	80	W
	PESD12VU1UT		-	200	W
	PESD15VU1UT		-	200	W
	PESD24VU1UT		-	200	W
I <sub>PP</sub>	peak pulse current	8/20 $\mu$ s	[1]		
	PESD3V3U1UT		-	5	A
	PESD5V0U1UT		-	5	A
	PESD12VU1UT		-	5	A
	PESD15VU1UT		-	5	A
	PESD24VU1UT		-	3	A
T <sub>j</sub>	junction temperature		-	150	°C
T <sub>amb</sub>	ambient temperature		-65	+150	°C
T <sub>stg</sub>	storage temperature		-65	+150	°C

[1] Non-repetitive current pulse 8/20  $\mu$ s exponential decay waveform according to IEC 61000-4-5.

**Table 6: ESD maximum ratings**


Symbol	Parameter	Conditions	Min	Max	Unit	
$V_{ESD}$	electrostatic discharge voltage	IEC 61000-4-2 (contact discharge)	[1] [2]			
			PESD3V3U1UT	-	30	kV
			PESD5V0U1UT	-	30	kV
			PESD12VU1UT	-	30	kV
			PESD15VU1UT	-	30	kV
			PESD24VU1UT	-	23	kV
		PESDxU1UT	HBM MIL-STD-883	-	10	kV

[1] Device stressed with ten non-repetitive ESD pulses.


[2] Measured from pin 1 to 2

**Table 7: ESD standards compliance**

Standard	Conditions
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
HBM MIL-STD-883; class 3	> 4 kV

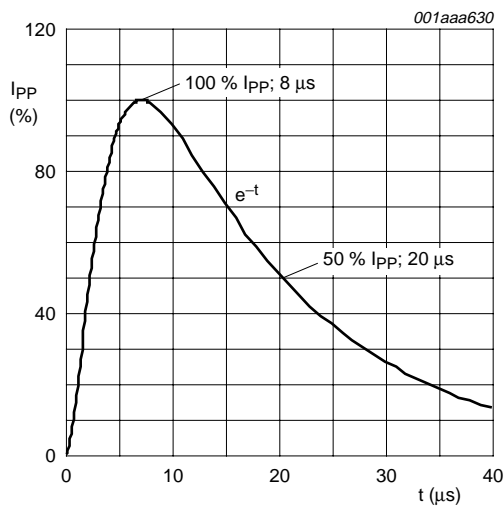

**Fig 1. 8/20  $\mu$ s pulse waveform according to IEC 61000-4-5**

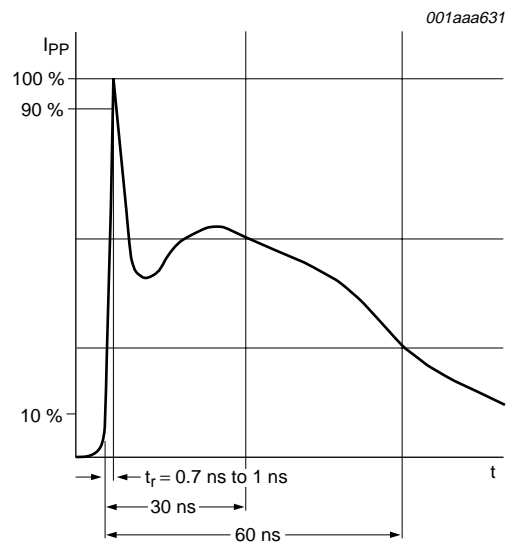

**Fig 2. ESD pulse waveform according to IEC 61000-4-2**

## 6. Characteristics

**Table 8: Characteristics**
 $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{RWM}$	reverse stand-off voltage					
	PESD3V3U1UT		-	-	3.3	V
	PESD5V0U1UT		-	-	5.0	V
	PESD12VU1UT		-	-	12	V
	PESD15VU1UT		-	-	15	V
	PESD24VU1UT		-	-	24	V
$I_{RM}$	reverse leakage current					
	PESD3V3U1UT	$V_{RWM} = 3.3\text{ V}$	-	0.25	2	$\mu\text{A}$
	PESD5V0U1UT	$V_{RWM} = 5.0\text{ V}$	-	0.03	1	$\mu\text{A}$
	PESD12VU1UT	$V_{RWM} = 12\text{ V}$	-	< 1	50	nA
	PESD15VU1UT	$V_{RWM} = 15\text{ V}$	-	< 1	50	nA
	PESD24VU1UT	$V_{RWM} = 24\text{ V}$	-	< 1	50	nA
$V_{BR}$	breakdown voltage	$I_R = 5\text{ mA}$	[2]			
	PESD3V3U1UT		5.8	6.4	6.9	V
	PESD5V0U1UT		7.0	7.6	8.2	V
	PESD12VU1UT		14.2	15.0	16.7	V
	PESD15VU1UT		17.1	18.9	20.3	V
	PESD24VU1UT		25.4	27.8	30.3	V
$C_d$	diode capacitance	$f = 1\text{ MHz}; V_R = 0\text{ V}$	[2]	0.6	1.5	pF
$V_{CL}$	clamping voltage		[1] [2]			
	PESD3V3U1UT	$I_{PP} = 1\text{ A}$	-	-	9	V
		$I_{PP} = 5\text{ A}$	-	-	20	V
	PESD5V0U1UT	$I_{PP} = 1\text{ A}$	-	-	12	V
		$I_{PP} = 5\text{ A}$	-	-	21	V
	PESD12VU1UT	$I_{PP} = 1\text{ A}$	-	-	23	V
		$I_{PP} = 5\text{ A}$	-	-	39	V
	PESD15VU1UT	$I_{PP} = 1\text{ A}$	-	-	28	V
		$I_{PP} = 5\text{ A}$	-	-	53	V
	PESD24VU1UT	$I_{PP} = 1\text{ A}$	-	-	40	V
		$I_{PP} = 3\text{ A}$	-	-	76	V
	$r_{dif}$	differential resistance	$I_R = 1\text{ mA}$			
PESD3V3U1UT			-	-	400	$\Omega$
PESD5V0U1UT			-	-	80	$\Omega$
PESD12VU1UT			-	-	200	$\Omega$
PESD15VU1UT			-	-	225	$\Omega$
PESD24VU1UT			-	-	300	$\Omega$

[1] Non-repetitive current pulse 8/20  $\mu\text{s}$  exponential decay waveform according to IEC 61000-4-5.

[2] Measured from pin 1 to 2


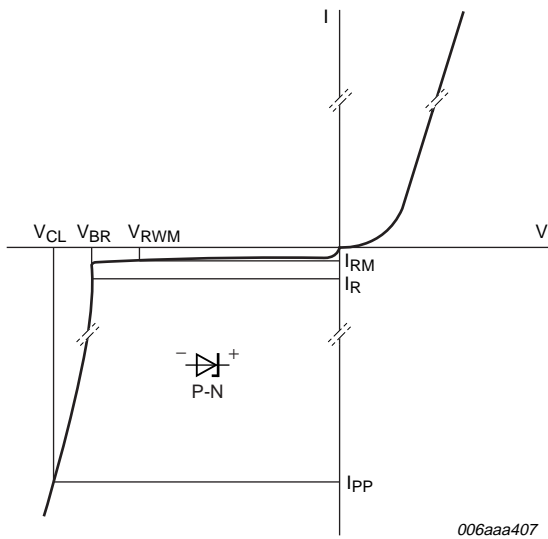


Fig 3. V-I characteristics

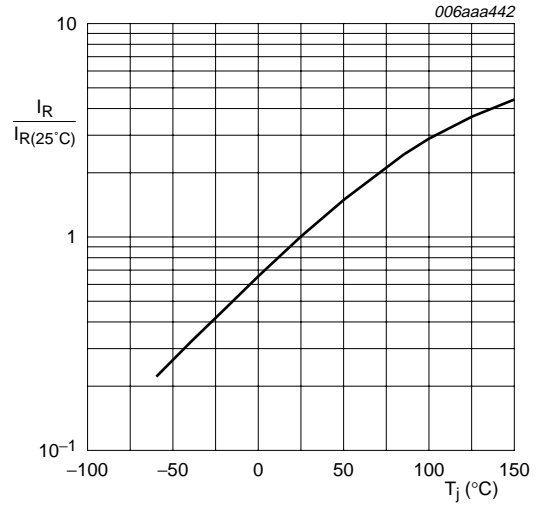

PESD3V3U1UT; PESD5V0U1UT


$I_R$  is less than 10 nA at 150  $^\circ C$  for:

PESD12VU1UT; PESD15VU1UT; PESD24VU1UT

Fig 4. Relative variation of reverse leakage current as a function of junction temperature; typical values

## 7. Application information

The PESDxU1UT series is designed for protection of high-speed datalines from damage caused by ESD and surge pulses. PESDxU1UT devices combine an ESD protection diode and an ultra low capacitance compensation diode to ensure an effective device capacitance as low as 0.6 pF. The PESDxU1UT series provides a surge capability of up to 200 W per line for an 8/20  $\mu$ s waveform.

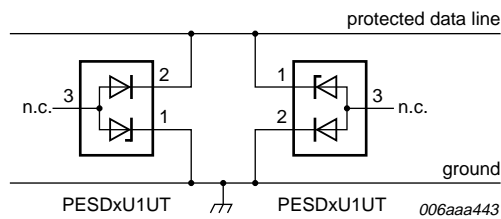

Two PESDxU1UT devices in anti-parallel configuration provide ESD protection in a common-mode application.

The two PESDxU1UT devices should be connected as follows:

**protected data line is connected to**

device 1 / pin 2

device 2 / pin 1


**Ground is connected to**

device 1 / pin 1

device 2 / pin 2

pin 3 is not connected for both devices

**Fig 5. Bi-directional ESD protection of one line, common mode**

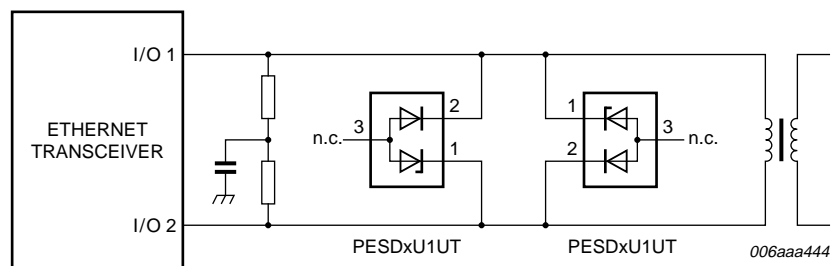

Two PESDxU1UT devices in anti-parallel configuration provide ESD protection in a differential-mode configuration as e.g. for Ethernet applications.

The two PESDxU1UT should be connected as follows:

**I/O line 1 is connected to**

device 1 / pin 2

device 2 / pin 1

**I/O line 2 is connected to**

device 1 / pin 1

device 2 / pin 2

pin 3 is not connected for both devices

**Fig 6. Differential mode Ethernet protection**


### Circuit board layout and protection device placement

Circuit board layout is critical for the suppression of ESD, Electrical Fast Transient (EFT) and surge transients. The following guidelines are recommended:

1. Place the PESDxU1UT as close to the input terminal or connector as possible.
2. The path length between the PESDxU1UT and the protected line should be minimized.
3. Keep parallel signal paths to a minimum.
4. Avoid running protected conductors in parallel with unprotected conductors.
5. Minimize all printed-circuit board conductive loops including power and ground loops.
6. Minimize the length of the transient return path to ground.
7. Avoid using shared transient return paths to a common ground point.
8. Ground planes should be used whenever possible. For multilayer printed-circuit boards, use ground vias.




**8. Test information**

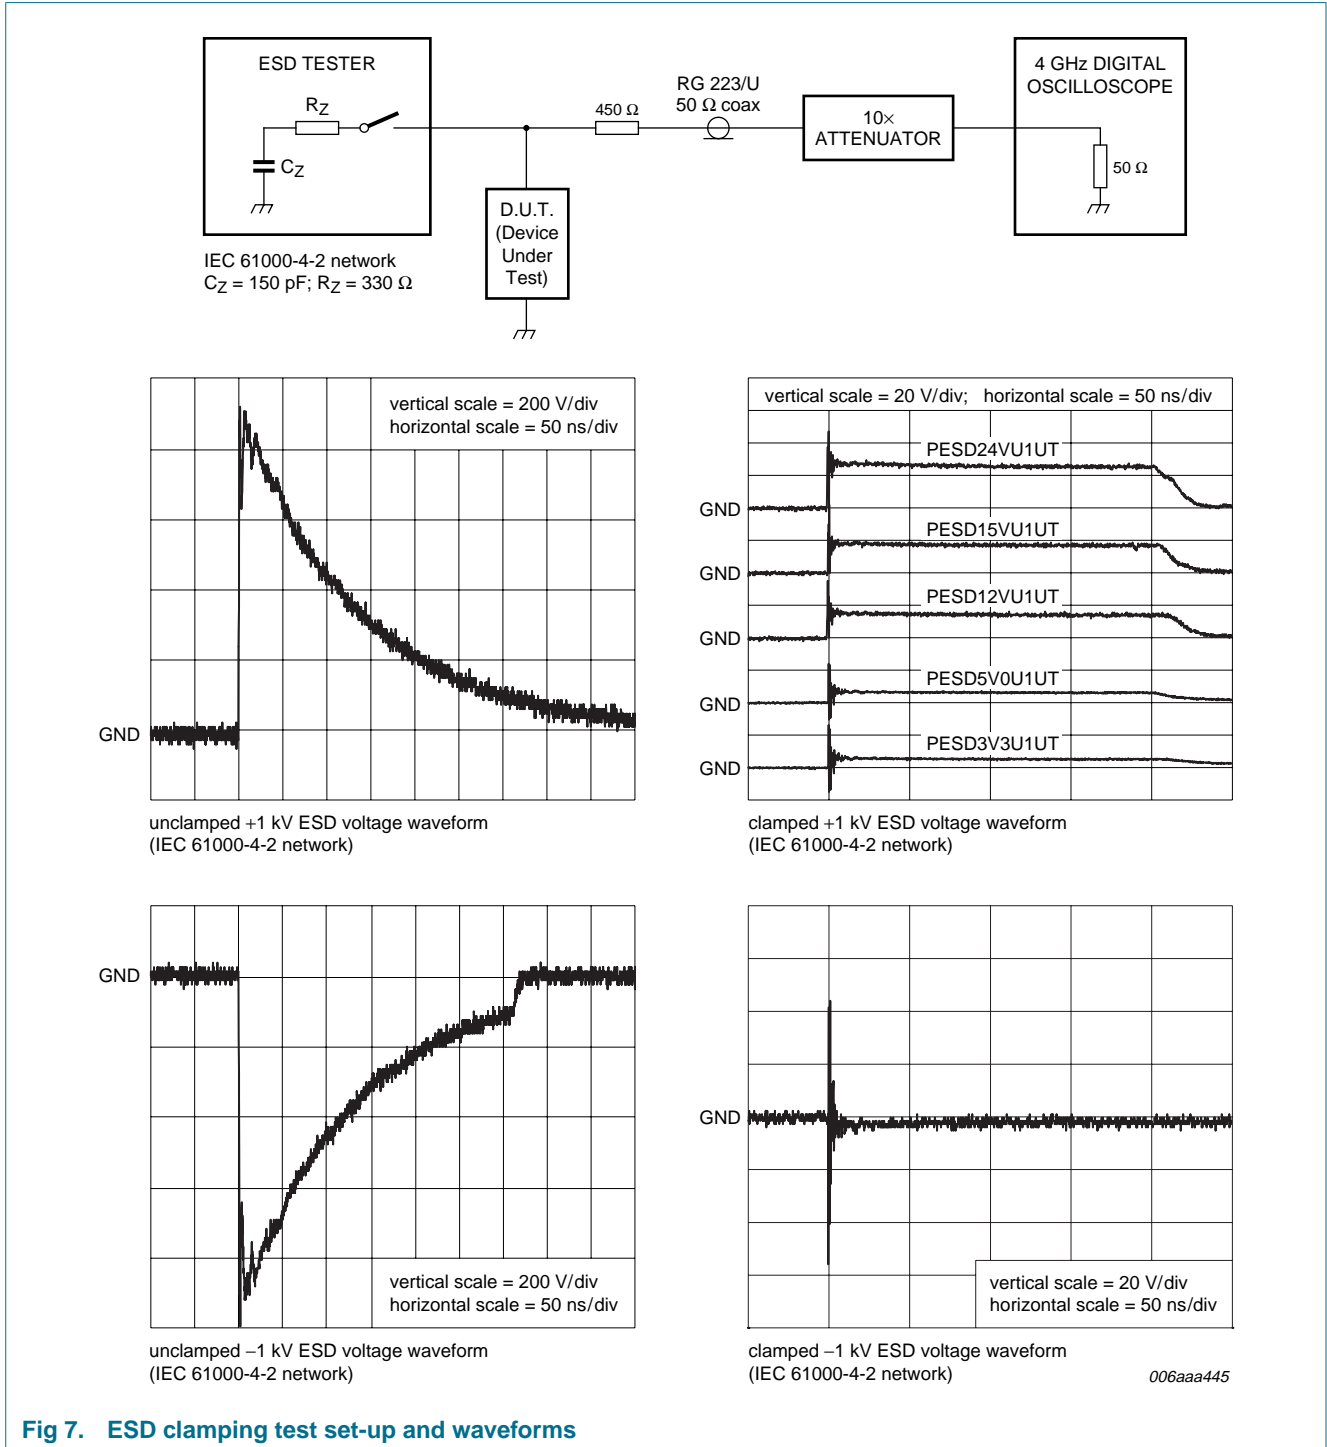

**Fig 7. ESD clamping test set-up and waveforms**

## 9. Package outline

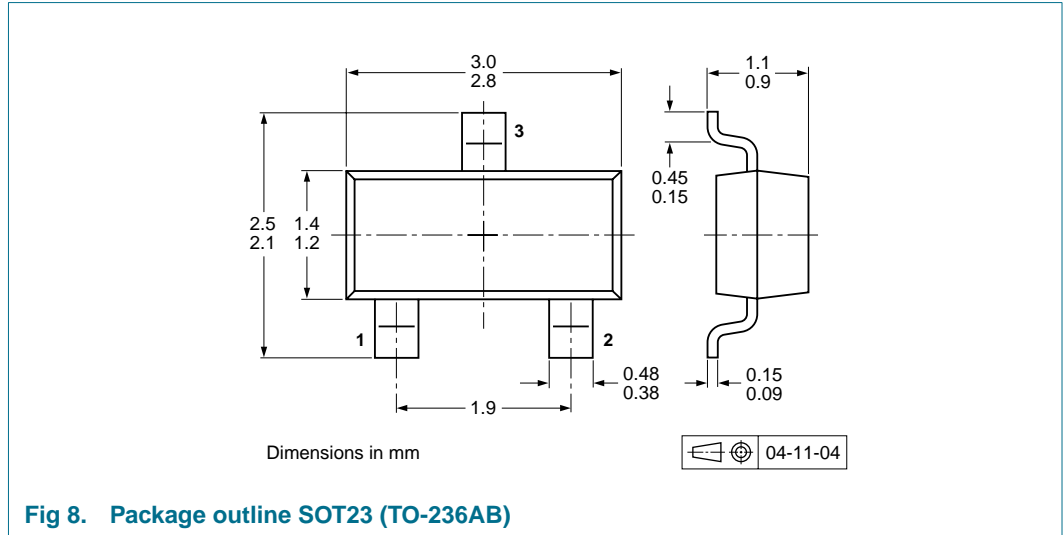

## 10. Packing information

**Table 9: Packing methods**

The -xxx numbers are the last three digits of the 12NC ordering code. [\[1\]](#)

Type number	Package	Description	Packing quantity	
			3000	10000
PESD3V3U1UT	SOT23	4 mm pitch, 8 mm tape and reel	-215	-235
PESD5V0U1UT				
PESD12VU1UT				
PESD15VU1UT				
PESD24VU1UT				

[1] For further information and the availability of packing methods, see [Section 16](#).

## 11. Revision history

Table 10: Revision history

Document ID	Release date	Data sheet status	Change notice	Doc. number	Supersedes
PESDXU1UT_SER_1	20050511	Product data sheet	-	9397 750 14912	-

## 12. Data sheet status

Level	Data sheet status <sup>[1]</sup>	Product status <sup>[2] [3]</sup>	Definition
I	Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
II	Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
III	Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN).

[1] Please consult the most recently issued data sheet before initiating or completing a design.

[2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

[3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

## 13. Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## 14. Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors

## 16. Contact information

For additional information, please visit: <http://www.semiconductors.philips.com>

For sales office addresses, send an email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com)

customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## 15. Trademarks

**Notice** — All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 17. Contents

---

<b>1</b>	<b>Product profile</b> . . . . .	<b>1</b>
1.1	General description. . . . .	1
1.2	Features . . . . .	1
1.3	Applications . . . . .	1
1.4	Quick reference data. . . . .	1
<b>2</b>	<b>Pinning information</b> . . . . .	<b>2</b>
<b>3</b>	<b>Ordering information</b> . . . . .	<b>2</b>
<b>4</b>	<b>Marking</b> . . . . .	<b>2</b>
<b>5</b>	<b>Limiting values</b> . . . . .	<b>3</b>
<b>6</b>	<b>Characteristics</b> . . . . .	<b>5</b>
<b>7</b>	<b>Application information</b> . . . . .	<b>7</b>
<b>8</b>	<b>Test information</b> . . . . .	<b>9</b>
<b>9</b>	<b>Package outline</b> . . . . .	<b>10</b>
<b>10</b>	<b>Packing information</b> . . . . .	<b>10</b>
<b>11</b>	<b>Revision history</b> . . . . .	<b>11</b>
<b>12</b>	<b>Data sheet status</b> . . . . .	<b>12</b>
<b>13</b>	<b>Definitions</b> . . . . .	<b>12</b>
<b>14</b>	<b>Disclaimers</b> . . . . .	<b>12</b>
<b>15</b>	<b>Trademarks</b> . . . . .	<b>12</b>
<b>16</b>	<b>Contact information</b> . . . . .	<b>12</b>



© Koninklijke Philips Electronics N.V. 2005

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: 11 May 2005  
Document number: 9397 750 14912

Published in The Netherlands