

## ► General data



Power supply unit, non-stabilized, filtered acc. to DIN 19240, input 230 V AC, output 24 V DC/10 A

Order number	2940456
Type	CM175-PS-230AC/24DCU/10
Barcode number	4017918080129
Unit pack	1 Pcs.
Customs tariff	85044094000

## ► Technical data

### Input data

Nominal input voltage	230 V AC
Frequency range	50 Hz ... 60 Hz
Current consumption	Approx. 1.6 A
Nominal power consumption	Approx. 370 VA
Inrush surge current	Power failure bypass
10 ms	Input fuse
Slow-blow	

### Output data

Nominal output voltage	24 V DC
Output current	10 A
Ripple factor	< 5 %
Output fuse	ISO/DIS 8820/DIN 72 581-3
Name of protection	Polarity protection
Protective circuit/component	Varistor, polarity protection, capacitor

---

### General data

Width	175 mm
Height	183 mm
Depth	155 mm
Weight	6.4 kg
Operating mode	100% operating factor
Test voltage input/output	4 kV AC
Degree of protection	IP 20
Ambient temperature (operation)	-20 °C ... 60 °C
Installation position	On horizontal DIN rail NS 35/15 unperforated, venting slits above and below
Assembly instructions	Can be aligned with spacing = 10 mm
Standards/regulations	IEC 664/IEC 664A/DIN VDE 0110-1:1989-01
Standards/regulations	DIN VDE 0551
Standards/regulations	DIN 19 240

---

### Connection data, input

Screw thread	M 2,5
Stripping length	8 mm
Type of connection	Screw connection
Min. conductor cross section AWG/kcmil	24
Conductor cross section AWG/kcmil max	14
Min. conductor cross section, rigid	0.2 mm <sup>2</sup>
Conductor cross section, rigid max.	2.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Max. conductor cross section, flexible	2.5 mm <sup>2</sup>

---



### Connection data, output

Stripping length	8 mm
Type of connection	Screw connection
Min. conductor cross section AWG/kcmil	24
Conductor cross section AWG/kcmil max	14
Min. conductor cross section, rigid	0.2 mm <sup>2</sup>
Conductor cross section, rigid max.	2.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Max. conductor cross section, flexible	2.5 mm <sup>2</sup>
Number of outputs	1


---

## ▸ Drawings

### Diagram



### Circuit diagram

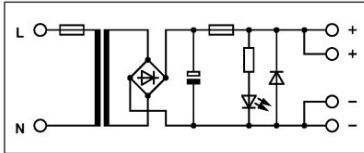

## ► Address

---

Phoenix Contact GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel + 49 - (0) 52 35 - 3-00  
Fax + 49 - (0) 52 35 - 3-4 12 00  
[www.phoenixcontact.com](http://www.phoenixcontact.com)

© Phoenix Contact  
Technical modifications reserved