





Features:

The Model PW 2 converts AC line voltage to regulated DC output. This compact power supply may be used to power various DC operated peripherals and inputs/output modules on PLC's, or transmitters in process control.

- Regulated Power Outputs of 5 VDC, 12 VDC and 24 VDC
- 120V/60Hz Input
- Screw Terminal Connections
- Easily Mounted
- Output DC voltages are isolated from AC line

Dimensions:

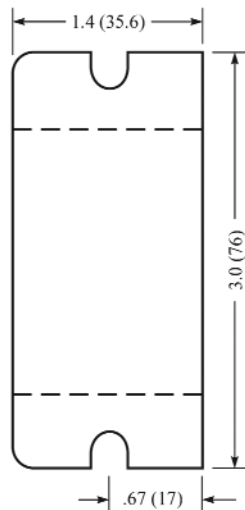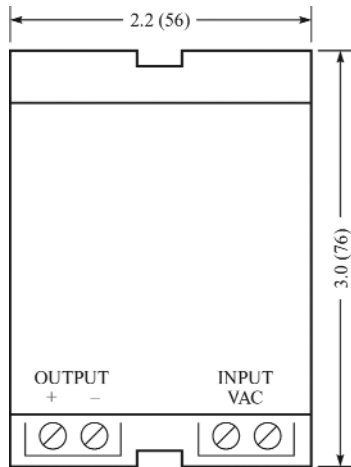

Specifications:

Voltage:	
Input :	120 VAC \pm 5%/60Hz (external fuse recommended)
Output:	5V \pm 0.2VDC@300mA
	12V \pm 0.5VDC@200mA
	24V \pm 1VDC@100mA
Environment:	
Operating Temperature:	0 to 55 °C
Max. Humidity:	95% RH, noncondensing
Weight:	0.38 lb.
Mounting:	side or base

Ordering Information:

PW2-5	120 AC/ 5 VDC Power Supply
PW2-12	120 AC/ 12 VDC Power Supply
PW2-24	120 AC/ 24 VDC Power Supply

