

**Model**

**Switch Mode Power Supply**

## PAS250

250 Watts<sub>max</sub> output power


Power Factor Correction

Single Output

**H.A.L.T.** Highly Accelerated Life Testing  
TESTED

### Electrical Specifications

Input Voltage:	85-132/180-264 VAC, 47-63 Hz, 1 phase
Input Current:	<6A RMS @ 115 VAC @ full load <3A RMS @ 230 VAC @ full load
Inrush Current:	<35A, pk @ 265 VAC @ cold start <75A, pk @ 132 VAC @ cold start
Harmonic Distortion:	Meets EN61000-3-2 for Class A
EMI Filtering:	Meets CISPR 11 and 22 and FCC Part 15 Class B (conducted)
Input Protection:	Internal AC line fuse; 250 VAC, 8A
Surge Withstand:	Meets EN61000-4-5 Level 3
Output Power:	250W with 25CFM air; 130W Convection
Line Regulation:	± 0.3%
Load Regulation:	± 0.5%
PARD:	<1% or 50mV; 20MHz bandwidth
Hold-up Time:	16 ms @ full load (120 VAC)
Output Polarity:	Output is floating
Minimum Load:	0% of rated load
Transient Response:	3% for 25% load change @ 1A/μs; 50% duty cycle 50/60 Hz
Output Rise Time:	<100 ms (10% to 90%)
Current Limit:	105-130% of rated current; Hiccup
Remote Sense:	Compensates for up to 250mV of total cable drop
Remote On/Off:	Optional

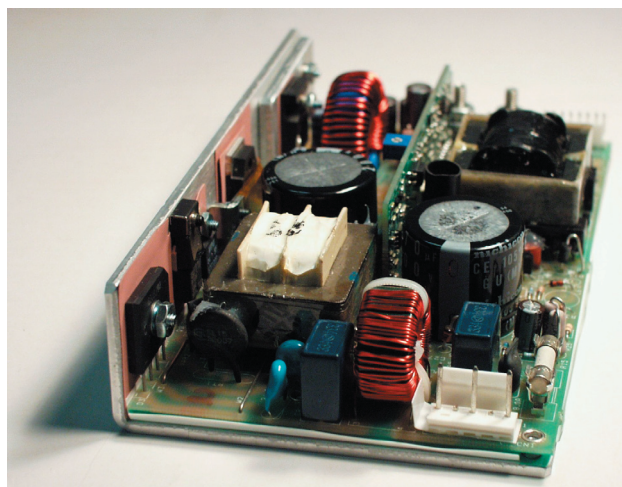

Thermal Shutdown:	Standard
DC OK:	Standard; Open Collector
Turn-on Delay:	<1 second after application of AC Input
Stability:	<0.1% for 8 hours after 1/2-hour warm up
Isolation:	>20 MΩ @ 100 VDC between output terminals and chassis ground
AC Power Fail:	TTL <sub>LOW</sub> logic "0" at least 2 ms before output drops 5%; Open Collector
Overvoltage Protect:	Factory set, 125% ±5%, cycle AC to reset
Reverse Voltage:	Output has reverse voltage protection; Reverse current limited to 100% of output rating
Efficiency:	Up to 85%
MTBF:	MIL-STD-HDBK 217E >200,000 hours @ 25°C Highly Accelerated Life Testing

### Available Voltage Outputs\*

Voltage Codes	Voltages (Volts)	Continuous Current (Amps)
<b>-4</b>	<b>12.0</b>	<b>21</b>
<b>-5</b>	<b>15.0</b>	<b>17</b>
<b>-6</b>	<b>24.0</b>	<b>10.5</b>
-7	28.0	9.0
-8	36.0	7.2
<b>-9</b>	<b>48.0</b>	<b>5.5</b>

\* Consult factory for other voltages and OEM quantities.

Note: Standard models are shown **bold**

### PART # STRUCTURE:

**MODEL** - **VOLTAGE CODE** - **OPTION CODES** (See sheet 2)  
**PAS250** - **X** - **ABC....**

Example: Part Number **PAS250-7-GS**= 250W Power Factor Corrected, 28V @ 9A with Field Configurable Options (Droop Share, Single Wire Share and Square Current Limit) and Remote On/Off Invert.

[CLICK HERE TO SEE THE PAS250 CODE TABLE AND AVAILABLE OPTIONS.](#)

## Model PAS250



### Options

- 12V@0.5A Aux./Fan Drive (A)
- Fan Assembly (C)
- PF Invert (F)
- Single Wire Current Share ±5% (I)
- Molex Connector (K)
- OR-ing Diode (O)
- Remote On/Off Invert (S)
- Droop Current Share ±10% (B)
- DC OK Invert (E)
- Field-Configurable (G)
- Square Current Limit (J)
- Metric Mounting (M)
- Remote On/Off (R)

### Certifications

- NRTL\*\*\* Recognition to UL60950-1
- CSA C22.2 No. 609501-03
- BAUART Certification to EN60950-1
- CB Test Report in Accordance with IEC60950-1
- CE Declaration to Low Voltage Directive 72/23/EEC


\*\*\* Nationally Recognized Test Laboratory

### Compliance

- EN61000-4-5 Level 3
- EN61000-3-2 for Class A
- EN61000-4-4 Level 3
- CISPR 11 and 22 FCC Part 15 Class B (conducted)
- EN61000-4-2 Level 2
- EN61000-4-2 Level 3 (Air Only)
- EN61000-4-11

### Physical Specifications

- Dimensions: (HxWxL) 1.5" x 4.0" x 7"
- Operating Temp: 0 to 70°C; rated power to 50°C derate linearly to 50% at 70°C.
- Relative Humidity: 5% to 90%, non-condensing
- Storage: -50 to 85°C/20-90% RH
- Altitude: 10,000' operating; 40,000' storage

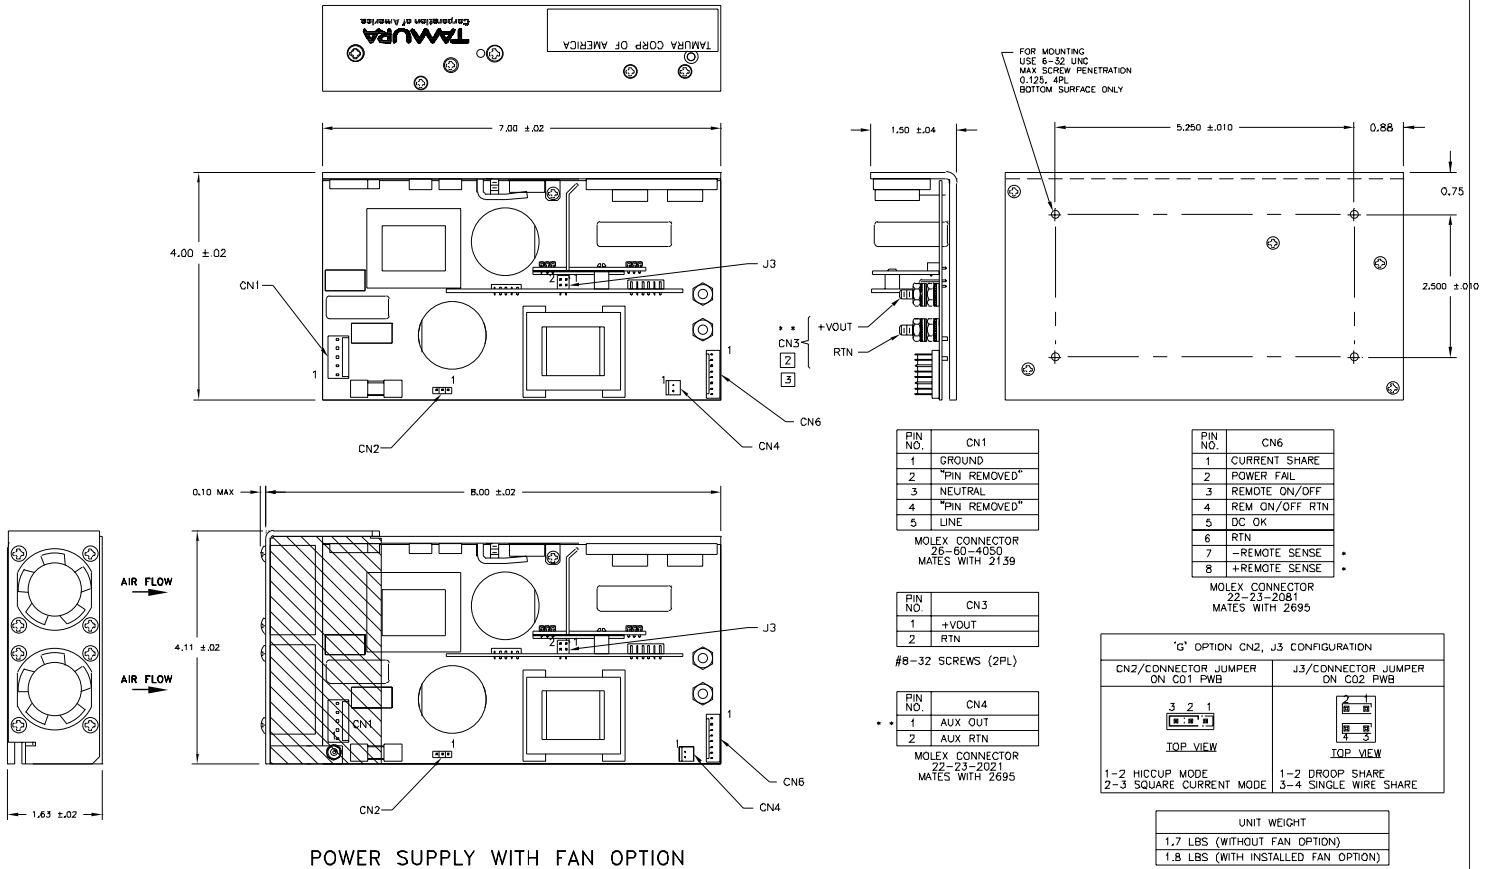

POWER SUPPLY WITH FAN OPTION

[3] OPTIONAL—MOLEX CONNECTOR (OPTION 'K'—LIMITED TO 7A) MAY BE SPECIFIED FOR CN3 INSTEAD OF STANDARD OUTPUT STUDS.  
 [2] DO NOT EXCEED 17 INCH-LBS (MAX TORQUE) WHEN TIGHTENING TOP NUTS ON OUTPUT STUDS.  
 1. FOR CLARITY NOT ALL ITEMS ARE SHOWN IN EACH VIEW.

\* **WARNING:** DAMAGE WILL OCCUR IF REMOTE SENSE LEADS (CN6-7 & CN6-8) ARE REVERSED OR USED WITH LOAD DISCONNECTED FROM OUTPUT (CN3).  
 \* **NOTE:** FOR PROPER REGULATION OF AUXILIARY OUTPUT, APPLY AT LEAST 10% OF RATED LOAD TO VOUT.

© Copyright 2006 TAMURA CORPORATION OF AMERICA. Specifications subject to change without notice.



TAMURA CORPORATION OF AMERICA  
 43352 Business Park Drive, Temecula, CA 92590-6624  
 (951) 699-1270 / Fax: (951) 676-9482  
**(800) 472-6624** www.tamuracorp.com

