



AC-AC UL/cUL ADAPTOR AC 20V 75mA



REV. Status

REVISION -  
10/25/01 RJ

REVISION A  
CHANGED  
A.2 & A.6  
05/06/02 RJ

REVISION B  
REVISED PLUG  
LOCATION. ADDED  
RoHS  
05/17/06 MP

REVISION C  
WITHSTAND  
VOLTAGE WAS  
1500Vrms  
08/01/06 MP

A. Electrical specifications

1. Input voltage: AC 120V ±10% 60Hz ±0.5Hz
2. Output voltage and current: AC 20V at 75mA

V <sub>in</sub>	100% Load	No Load
108	16.0VAC MIN	-
120	19.5-20.5VAC	25.5VAC MAX
132	-	28.0VAC MAX


NOTE: Specification applies after 10 minutes warm-up with full load and at any operating temperature.

3. Operating temperature: -10 °C to +40 °C
4. Storage temperature: -20 °C to +85 °C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: 1000Vrms 1 minute @ input to output


B. Typical performance data test Condition:  
T<sub>a</sub> = +25°C measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies  
UL and cUL File No. E218172

D. Nameplate: Information is as follows:  
Metallic letters on a black background




TYPICAL PERFORMANCE CHART

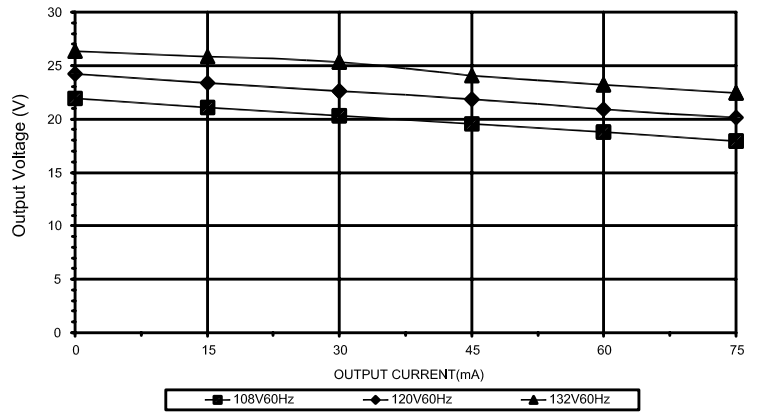

E. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

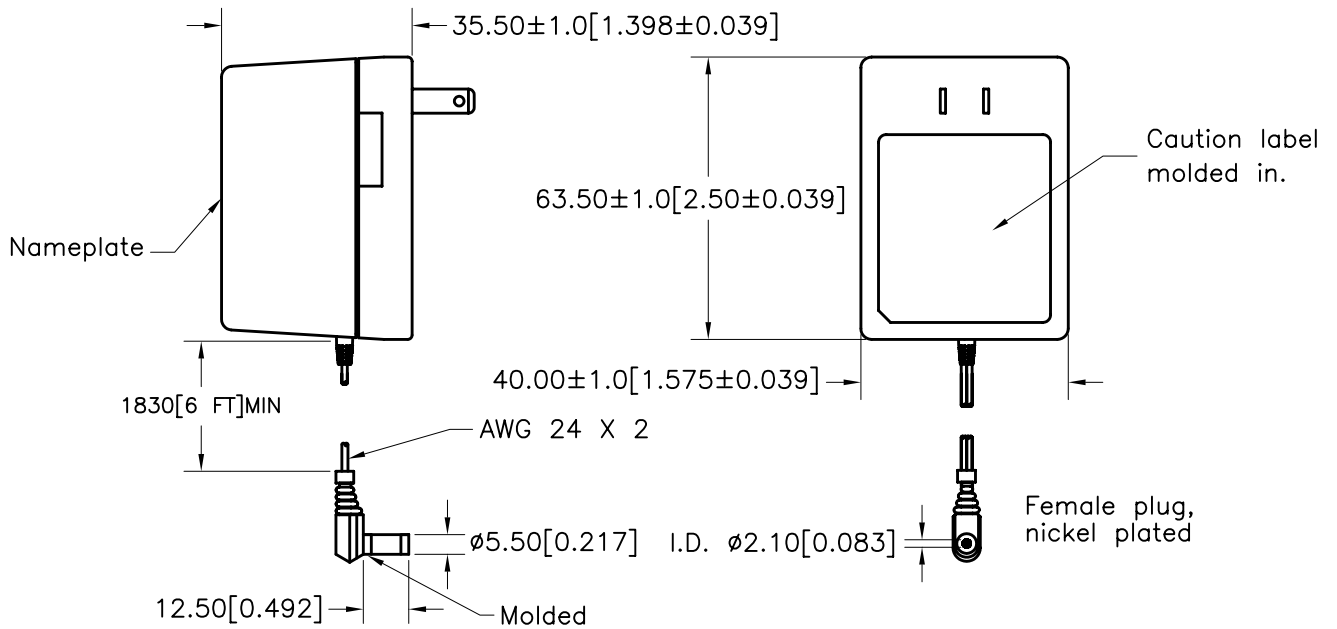

PREPARED BY:

K. BRENNAN

ENGINEER:

M. PITCHAI

QUALITY CONTROL:

T. CLEM

APPROVED:

Y. SEKIGUCHI

DWG CONTROL NO. P-A7-12932  
ACAD\PS\A7129321.DWG

REV C

UL/cUL AC 20V 75mA  
POWER SUPPLY

TAMURA CORPORATION OF AMERICA  
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
(951) 699-1270 FAX 9516769482

212AS20007

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.