

# MW174KB

## Universal 40-65 Watt Series



**Medical / Switch Mode Power Supply**

**3 Year Warranty**

- 100-240 VAC Universal Input
- Desktop Style
- Single Output to 65W
- Four Models Available; 12V to 24V
- Regulated Output with Low Ripple
- Impact Resistant Polycarbonate Enclosure
- Modified and Custom Designs
- Designed to Meet EISA Requirements — see reverse side for details



**International Safety Standard Approvals**



## Specifications

Output Specifications			General Specifications		
Line and Load Regulation (Excluding cord)		Line Voltage +/-1% Load Voltage +/-5%	Topology		Switching-Fixed Frequency Flyback
Ripple		1% Vp-p max.	Efficiency		Designed to Meet EISA Requirements — see reverse side
Transient Response		0.5ms for 50% Load change Typical	Hold-up Time @120VAC		18ms min.
Protection		Over-current Protection (Hiccup) Short Circuit Protection	Dielectric Withstand		4,000VAC or 5,656VDC Primary-Secondary; 1,500VAC or 2,150VDC Primary-F.G; 500VDC Secondary-F.G
Input Specifications			Storage Temp		-30° C to 85° C
Input Voltage Range	Universal input	100-240VAC -10%, +10%	Approvals and Safety Standards	Australian, Japanese certification available - extra fees apply.	UL60601-1, IEC/EN60601-1 EMC : EN60601-1-2 EN55024
Line Frequency		47-63Hz	MTBF		100,000 Calculated Hours
Input Current	90VAC Input	1.5A max.	Case and Dimension		Desktop Style 4.20L x 2.60W x 1.46H (in) 107.0L x 66.0W x 37.0H (mm)
Protection		Internal Primary Current Fuse, Inrush Limiting	Case Material		Black 94V0 Polycarbonate
Environmental Specifications			Cord and Connectors		18 AWG 1,500mm 2 Conductor. Ault #3 Connector. Other connectors are also available.
Thermal Performance	Operating temperature full load, no derating convictional cooling Non vented case	0° C to 40° C			
Relative Humidity	Non-condensing	5% to 95%			
Altitude		0-10,000 feet			

# MW174KB

Universal 40-65 Watt Series

Medical / Switch Mode Power Supply

For the most current data and application support visit [www.slpower.com](http://www.slpower.com)

Ault Part Number	Output Voltage	Output Current Max	Max Watts	Ripple Vp-p max.
MW174KB12XX	12 V	5.00 A	60.0 W	120 mV
MW174KB15XX	15 V	4.00 A	60.0 W	150 mV
MW174KB18XX	18 V	3.40 A	61.2 W	180 mV
MW174KB24XX	24 V	2.70 A	64.8 W	240 mV

## Ault Part Number Key


Product Family Name	Manufacturing Location	Design Revision Changes	Voltage DC	Connector Number
MW174	K	B	12	XX

## Input Configuration



IEC320  
w/ground  
C14  
(F)

## Pin Connections

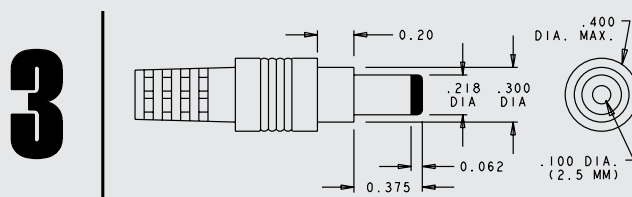

Pinout Code	Center contact: positive
Description	Switchcraft 760 plug or equivalent
Suggested Mating	Switchcraft 712A jack or equivalent
Other Connectors are available by special order	

## 2007 Energy Independence and Security Act – EISA

The Energy Independence and Security Act of 2007 was passed in December of 2007 and addresses minimum efficiency standards and standby levels for Class A external power supplies that are 250 watts and under. This law stipulates that external power supplies manufactured on July 1, 2008 and beyond meet certain minimum efficiency and standby criteria as defined below.

### Minimum Efficiency Criteria

Active mode is defined as when a power supply's input is connected to line voltage AC and its output is connected to a DC or AC load drawing a portion of the product's power output. Depending on the power rating for the power supply, it must meet the minimum efficiency criteria outlined below.

### Energy-Efficiency Criteria for Active Mode:

output power on adapter label	minimum average efficiency percentage
0 to $\leq$ less than 1 watt	$\geq 0.50 * \text{output power on adapter label}$
$> 1$ to $\leq 51$ watts	$\geq [0.09 * \text{Ln}(\text{output power on adapter label})] + 0.50$
$> 51$ watts	$\geq 0.85$

The power supply must also meet a requirement for when its input is connected to a line voltage AC but its output is not connected to a load. Depending on the power output of the supply, it must keep its energy consumption below the following values.

### Energy Consumption Criteria for No Load Mode:

output power on adapter label	maximum power consumption in no-load mode
0 to $< 250$ watts	$\leq 0.5$ watts



SL Power Electronics Corp • 6050 King Drive • Ventura, CA 93003 • Phone:805.486.4565 • Fax:858.712.2040 • Email:info@slpower.com • www.slpower.com

Data Sheet © 2008 SL Power Electronics Corp. The information and specifications contained in this data sheet are believed to be correct at time of publication.

However, SL Power accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.

Rev.6/9/08