

***EV2300***  
***Evaluation Module Interface Board***

*User's Guide*

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

### Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265

## EVM IMPORTANT NOTICE

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation kit being sold by TI is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not considered by TI to be fit for commercial use. As such, the goods being provided may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety measures typically found in the end product incorporating the goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may not meet the technical requirements of the directive.

Should this evaluation kit not meet the specifications indicated in the EVM User's Guide, the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Please be aware that the products received may not be regulatory compliant or agency certified (FCC, UL, CE, etc.). Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

**EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**.

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein**.

Please read the EVM User's Guide and, specifically, the EVM Warnings and Restrictions notice in the EVM User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact the TI application engineer.

Persons handling the product must have electronics training and observe good laboratory practice standards.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265

## **EVM WARNINGS AND RESTRICTIONS**

It is important to operate this EVM within the input voltage range of 5 V and the output voltage range of 3.3 V at 30 mA and 5 V at 50 mA.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 30°C. The EVM is designed to operate properly with certain components above 70°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

### **Mailing Address:**

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265

# Read This First

---

---

---

---

### ***About This Manual***

This users guide describes the function and operation of the EV2300 evaluation module. A complete description, as well as schematic diagram and bill of materials are included.

### ***How to Use This Manual***

This document contains the following chapters:

- Chapter 1—Introduction
- Chapter 2—Interfaces
- Chapter 3—EV2300 Bill of Materials, Component Placement, and Schematic

### ***Information About Cautions and Warnings***

This document may contain cautions and warnings.

**This is an example of a caution statement.**

**A caution statement describes a situation that could potentially damage your software or equipment.**

**This is an example of a warning statement.**

**A warning statement describes a situation that could potentially cause harm to you.**

The information in a caution or a warning is provided for your protection. Please read each caution and warning carefully.



**This EVM contains components that can potentially be damaged by electrostatic discharge, Always transport and store the EVM in its supplied ESD bag when not in use. Handle using an antistatic wristband. Operate on an antistatic work surface. For more information on proper handling, refer to SSYA008.**

### ***FCC Warning***

This equipment is intended for use in a laboratory test environment only. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to subpart J of part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

# Contents

---

---

---

<b>1</b>	<b>Introduction</b>	<b>1-1</b>
1.1	Features	1-2
1.2	Kit Contents	1-2
1.3	Ordering Information	1-2
<b>2</b>	<b>Interfaces</b>	<b>2-1</b>
2.1	Overview	2-2
2.2	EV2300 Controller	2-2
2.3	USB Interface (USB)	2-3
2.4	HDQ Interface (HDQ)	2-3
2.5	I <sup>2</sup> C/EEPROM Interface (I <sup>2</sup> C)	2-4
2.6	SMBus Interface (SMBus)	2-4
<b>3</b>	<b>EV2300 Bill of Materials, Component Placement, and Schematic</b>	<b>3-1</b>
3.1	Bill of Materials (BOM)	3-2
3.2	EV2300 Component Placement	3-4
3.3	EV2300 Schematic	3-12

# Figures

---

---

---

3-1	Board Layer 1	3-4
3-2	Solder Mask 1	3-5
3-3	Solder Mask 2	3-6
3-4	Board Layer 2	3-7
3-5	Component Placement 1	3-8
3-6	Component Placement 2	3-9
3-7	Internal Board Layer 1	3-10
3-8	Internal Board Layer 2	3-11

# Tables

---

---

---

1-1	Ordering Information	1-2
-----	----------------------	-----





# Introduction

---

---

---

---

This EVM interface board enables an IBM-compatible or other type (with required driver for the particular platform) PC to communicate with Texas Instruments SMBus, HDQ or DQ interface gas gauges via a Universal Serial Bus (USB) port. In addition to this board, PC software is required to interpret the gas gauge data to complete the evaluation system.

<b>Topic</b>	<b>Page</b>
<b>1.1 Features</b> .....	<b>1-2</b>
<b>1.2 Kit Contents</b> .....	<b>1-2</b>
<b>1.3 Ordering Information</b> .....	<b>1-2</b>

## 1.1 Features

- Fully powered from the USB port
- Capable of providing a 25-mA 3.3-V source
- Complete interface between USB and SMBus, I<sup>2</sup>C, and HDQ (8/16) interfaces using a simple API

## 1.2 Kit Contents

- EV2300 circuit module
- Standard USB cable

## 1.3 Ordering Information

*Table 1–1. Ordering Information*

<b>EVM Part Number</b>
EV2300

# Interfaces

---

---

---


The EV2300 interfaces are described in the following table. The reference designators on the circuit board and the functions are also listed.

<b>Reference Designator</b>	<b>Function</b>	<b>Description</b>
HDQ and SMB	SMBus, HDQ and DQ Interface ports	Terminal block for connecting to a target device
I <sup>2</sup> C	E <sup>2</sup> PROM I <sup>2</sup> C Interface	Terminal for connecting to a target E <sup>2</sup> PROM or I <sup>2</sup> C interface battery monitor
USB	USB Interface	Interface to host computer

<b>Topic</b>	<b>Page</b>
<b>2.1 Overview</b> .....	<b>2-2</b>
<b>2.2 EV2300 Controller</b> .....	<b>2-2</b>
<b>2.3 USB Interface (USB)</b> .....	<b>2-3</b>
<b>2.4 HDQ Interface (HDQ)</b> .....	<b>2-3</b>
<b>2.5 I<sup>2</sup>C/EEPROM Interface (I<sup>2</sup>C)</b> .....	<b>2-4</b>
<b>2.6 SMBus Interface (SMBus)</b> .....	<b>2-4</b>

## 2.1 Overview

The EV2300 is enclosed and is provided as shown.

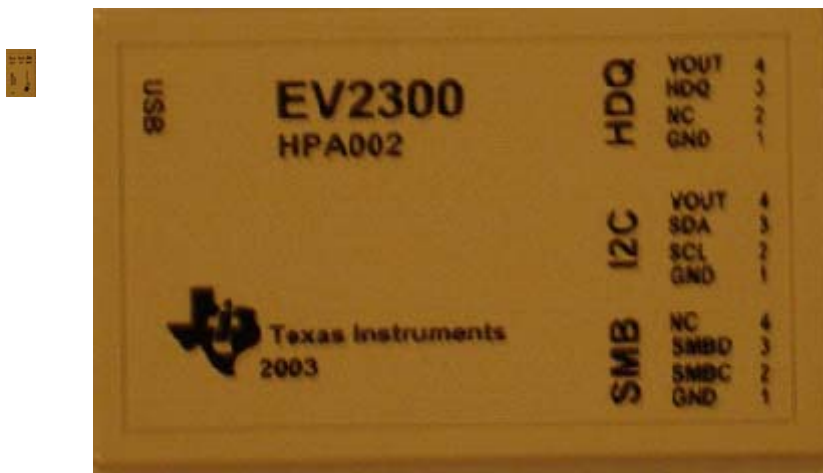

## 2.2 EV2300 Controller

The EV2300 controller is a bq8012 running at 4 MHz. The controller firmware is stored in flash memory and is executed by the core at power-up after the boot ROM code verifies the integrity words.

The controller communicates with target device(s) through either: a 2-wire SMBus communication port, a 1-wire HDQ port, or a 2-wire E<sup>2</sup>PROM I<sup>2</sup>C port. The 2-wire SMBus communication port supports both SMBus and I<sup>2</sup>C protocols.

## 2.3 USB Interface (USB)

The interface board connects to a USB port (version 1.1) on a host computer and is powered from the port. All communication over the USB is proprietary and does not fit any USB-defined device classes. Therefore communication with the device requires a loader and driver from Texas Instruments.

The loader enumerates the device (determines it is present on the USB), then loads the EV2300 controller firmware for the USB interface. Once the firmware load is complete, the loader sends a command to the USB interface IC to execute the new program and the loader driver exits. A new driver takes control and enumerates the EV2300 and makes the device present to programs running on the host.

The installer for the USB EVB installs:

- 1) A loader driver
- 2) A binary to load onto the USB interface IC
- 3) An EV2300 controller driver for direct access to the device
- 4) An EV2300 DLL for application access to the device

## 2.4 HDQ Interface (HDQ)

This interface allows a host computer to interact with a slave or target device through the two-wire SMBus or the one-wire HDQ interfaces. The ports are labeled with the corresponding signal names above each port connector. Connect the signal and a ground reference (GND), and optionally VOUT, to a target device.

The two-wire interface supports SMBus version 1.1 byte, word, block transactions with and without PEC. The SMBus limits the capacitance on each line (Data and Clock) to 100 pF. The EV2300 places 8 pF on each line, so a device may place up to 92 pF total. If the capacitive load approaches or exceeds 100 pF, SMBus communication may not be reliable.

Pin	Name	Description
1	GND	Ground return/reference for HDQ interface.
3	HDQ	HDQ one-wire interface. Pulled up to 3.3-V rail with a 10-k $\Omega$ resistor.
4	VOUT	Supplies 3.3 VDC to a target. Current load should be limited to 30 mA.

## 2.5 I<sup>2</sup>C/EEPROM Interface (I<sup>2</sup>C)

This interface allows a host computer to interact with a target E<sup>2</sup>PROM or other I<sup>2</sup>C interface device such as a battery monitor device through a two-wire I<sup>2</sup>C interface. The interface contains a controlled power pin, the I<sup>2</sup>C clock and data lines, and a ground reference.

Pin	Name	Description
1	GND	Ground return. Connected to the SMD and HDQ GND.
2	SCL	I <sup>2</sup> C clock. This line must be pulled up by the target.
3	SDA	I <sup>2</sup> C data. This line must be pulled up by the target.
4	VOOUT	Controlled EEPROM power. Supplies 5 VDC to a target EEPROM IC

## 2.6 SMBus Interface (SMBus)

Pin	Name	Description
1	GND	Ground reference
2	SMBC	SMB clock pin. This pin is pulled to 3.3 VDC through a 10-k $\Omega$ resistor. Do not exceed 5.6 VDC on this pin.
3	SMBD	SMB data pin. This pin is pulled to 3.3 VDC through a 10-k $\Omega$ resistor. Do not exceed 5.6 VDC on this pin.
4	NC	Not connected on this board. This pin is floating.

# **EV2300 Bill of Materials, Component Placement, Schematic**

---

---

---

---

This chapter includes the schematic, component placement on the circuit board, and a listing of the bill of materials for the EV2300 EVM.

<b>Topic</b>	<b>Page</b>
<b>3.1 Bill of Materials (BOM) .....</b>	<b>3-2</b>
<b>3.2 EV2300 Component Placement .....</b>	<b>3-4</b>
<b>3.3 EV2300 Schematic .....</b>	<b>3-12</b>

## 3.1 Bill of Materials (BOM)

Qty	Ref Des	Description	Size	MFR	Part Number
10	C1-C7, C10-C12, C15, C20	Capacitor, ceramic, 0.1 $\mu$ F, 25 V, X7R, 10%	603	TDK	C1608X7R1E104KT
0	C13	Open	603		
2	C16, C21	Capacitor, POSCAP 4.7 $\mu$ F, 35 V, 20%	6032 (C)	AVX	TAJC475K035R
1	C18	Capacitor, ceramic, 2200 pF, 50 V, C0G, 10%	603	TDK	C1608C0G1H222KT
1	C19	Capacitor, ceramic, 150 pF, 50 V, C0G, 10%	603	TDK	C1608C0G1H151KT
2	C8, C9	Capacitor, ceramic, 22 pF, 50 V, C0G, 10%	603	TDK	C1608C0G1H220KT
0	D1-D7, D9, D13-D15, D17	Open	0.068 $\times$ 0.049		
2	D12, D19	Diode, LED, green, 20 mA, 0.9 mcd	0.068 $\times$ 0.049	Panasonic	LN1371G-(TR)
1	D20	Diode, LED, red, 20 mA, 0.9 mcd	0.068 $\times$ 0.049	Panasonic	LN1271R-(TR)
3	D21-D23	Diode, dual, 250 mA, 70 V	SOT23	Vishay-Liteon	BAW56GS08
5	D8, D10, D11, D16,D18	Diode, low capacitance, TVS	SOT23	General Semi	GL05T
1	J1	Connector, USB upstream (Type B)	0.47" $\times$ 0.67"	Molex	67068-1000
3	J13-J15	Header, friction lock assembly, 4-pin right angle	0.400 $\times$ 0.500	Molex	22-05-3041
1	J2	Header, 11 pin, 100 mil spacing, (36-pin strip)	121100	Sullins	PTC36SAAN
0	J3-J5, J8-J11	Open	0.038"		
1	J7	Header, 2 pin, 100 mil spacing, (36-pin strip)	0.100 $\times$ 2"	Sullins	PTC36SAAN
1	Q1	Transistor, NPN, high-performance, 500 mA	SOT23	Fairchild	MMBT2222A
1	Q2	MOSFET, P-ch, -12 V, 4 A, 51 m $\Omega$	SOT23	Vishay	Si2335DS
4	R1, R14, R16, R19	Resistor, chip, 10 k $\Omega$ , 1/16 W, 5%	603	Std	Std
12	R13, R15, R21-R24, R26, R27, R45, R46, R49, R50	Resistor, chip, 100 $\Omega$ , 1/16 W, 5%	603	Std	Std
3	R18, R42, R43	Resistor, chip, 1 M $\Omega$ , 1/16 W, 1%	603	Std	Std
1	R2	Resistor, chip, 15 k $\Omega$ , 1/16 W, 5%	603	Std	Std
7	R3-R5, R32-R34, R39	Resistor, chip, 100 k $\Omega$ , 1/16 W, 5%	603	Std	Std
3	R30, R51, R52	Resistor, chip, 620 $\Omega$ , 1/16 W, 5%	603	Std	Std
2	R31, R41	Resistor, chip, 10 $\Omega$ , 1/16 W, 5%	603	Std	Std
1	R35	Resistor, chip, 61.9 k $\Omega$ , 1/16 W, 1%	603	Std	Std



Qty	Ref Des	Description	Size	MFR	Part Number
1	R53	Resistor, chip, 0 Ω, 1/16 W, 5%	603	Std	Std
1	R54	Resistor, chip, 113 kΩ, 1/16 W, 0.1%	603	Vishay	TNPW06031133BT9RT1
1	R6	Resistor, chip, 1.5 kΩ, 1/16 W, 5%	603	Std	Std
0	R7, R10–R12, R17, R20, R25, R28, R36–R38, R40	Open	603		
2	R8, R9	Resistor, chip, 33 Ω, 1/16 W, 5%	603	Std	Std
0	SW1	Open	5 mm × 5 mm		
2	U1, U2	IC, Single bus buffer gate with 3–state output, with negative enable	DCK	TI	SN74LVC1G125DCK
1	U3	IC, Single bus buffer gate with 3–state output, with positive enable	DCK	TI	SN74LVC1G126DCK
1	U4	IC, USB, general purpose, device controller	0.480 × 0.480"	TI	TUSB3210PM
1	U5	IC, ultra low-power LDO regulator, 3.3 V, 50 mA	SOT23-5	TI	TPS77033DBV
1	U6	IC, Advance gas gauge	DBT38	TI	bq8015DBT
1	Y1 or Y4	Cryatal, high performance, 12.00 MHz, SMT	0.126 × 0.126	Citizen or Daishinku	CSA-309–12.000MABJ or DSX630G-12.00MHz
0	Y2 or Y3	Crystal, 32,768 MHz, 7–12 pF capacitance	1.9mm × 5mm	Daishinku or ECS	DST520G-32.768kHz or ECS-.327-8-14
1	N/A	Plastic enclosure, bone, Texas Instruments silkscreen		PacTec	84107–501–039
		Wire Cable Assembly			
1	Mate	Connector, female, 0.100 centers		22–01–30 47	Molex
4	N/A	Terminals, crimp, tin		08–50–011 4	Molex
	N/A	Wire, insulated 22 Awg, red, 18 inches (± 3 inches) (VOUT)		Any	Any
	N/A	Wire, insulated 22 Awg, white, 18 inches (± 3 inches) (SCL)		Any	Any
	N/A	Wire, insulated 22 Awg, black, 18 inches (± 3 inches) (GND)		Any	Any
	N/A	Wire, insulated 22 Awg, brown, 18 inches (± 3 inches) (SDA)		Any	Any
1	N/A	Heatshrink 1"		Any	Any

- Notes:**
- 1) These assemblies are ESD sensitive, ESD precautions should be observed.
  - 2) These assemblies must be clean and free from flux and all contaminants. Use of no clean flux is not acceptable.
  - 3) These assemblies must comply with workmanship standards IPC-A-610 Class 2.
  - 4) Reference designators marked with an asterisk (\*) cannot be substituted. All other components can be substituted with equivalent manufacturers components.
  - 5) Make one EEPROM connector wire assembly for each assembly produced, from J15 mate, 4 – 22 AWG wires and crimp terminals. Wire colors for pin numbers are listed below. Strip and tin flying leads 0.25 inches from end of wire.  
 Red – pin #4 (signal VOUT)  
 Brown – pin #3 (signal SDA)  
 White – pin #2 (signal SCL)  
 Black – pin #1 (GND)

### 3.2 EV2300 Component Placement

Figure 3-1. Board Layer 1

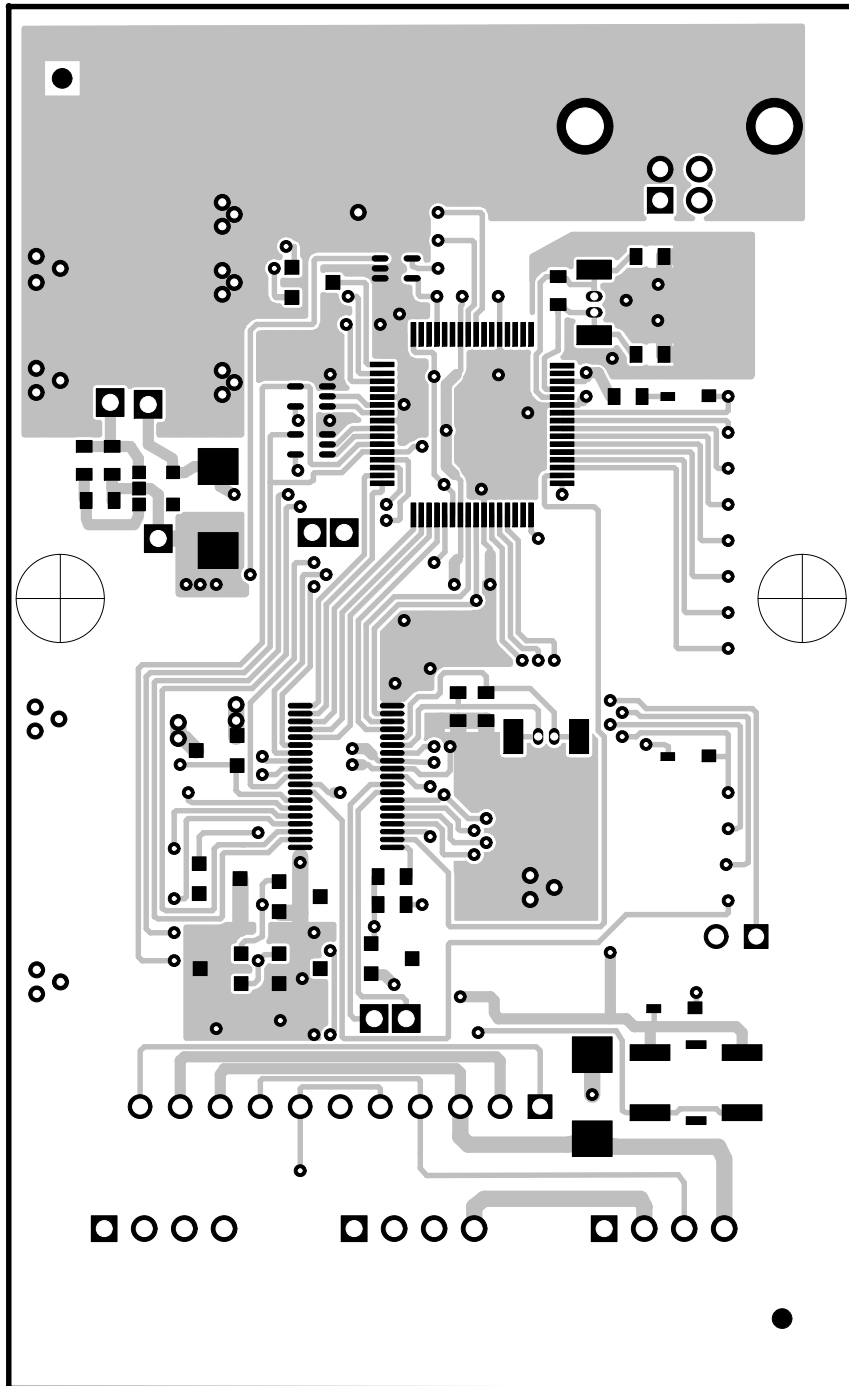


Figure 3-2. Solder Mask 1

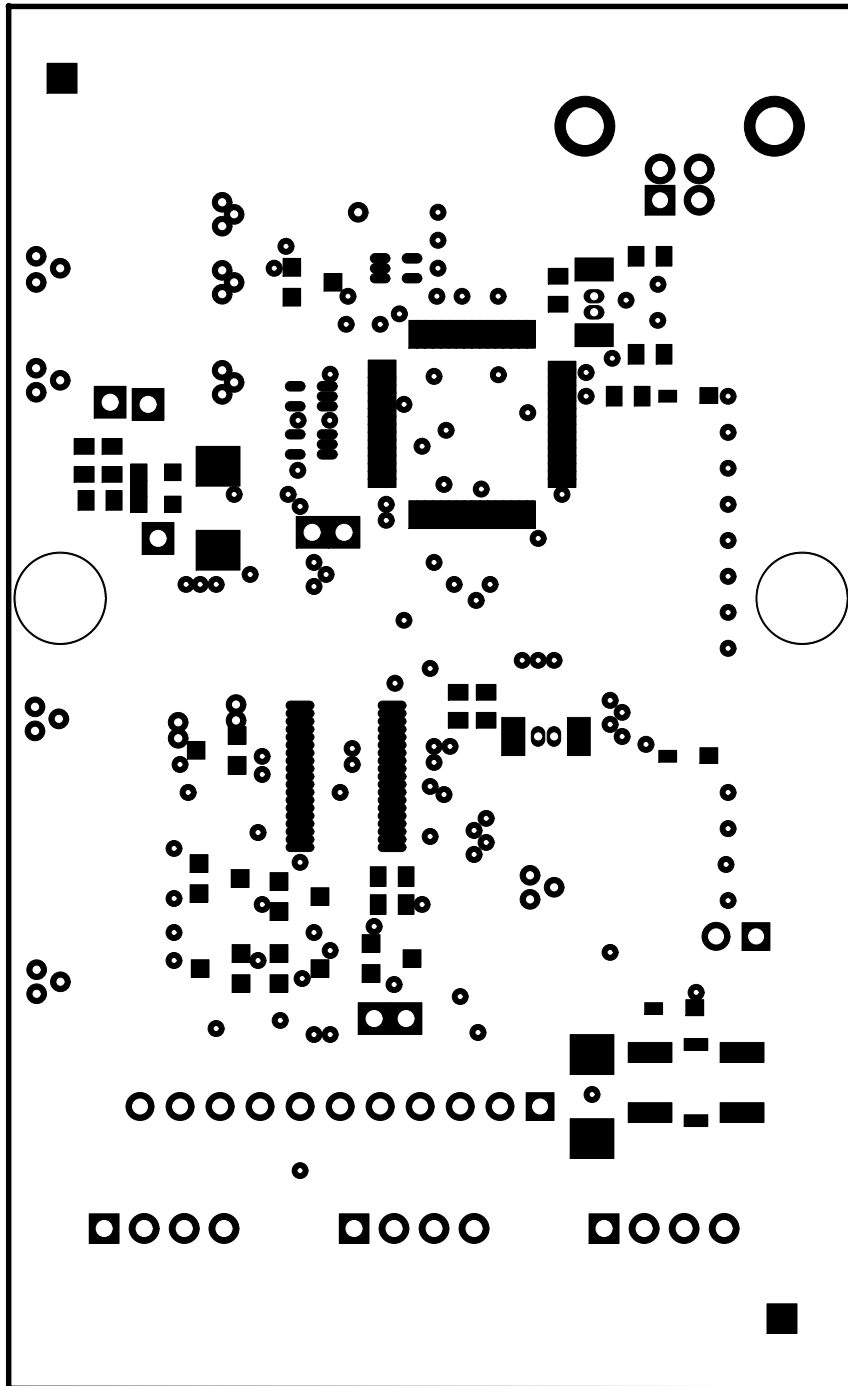


Figure 3-3. Solder Mask 2

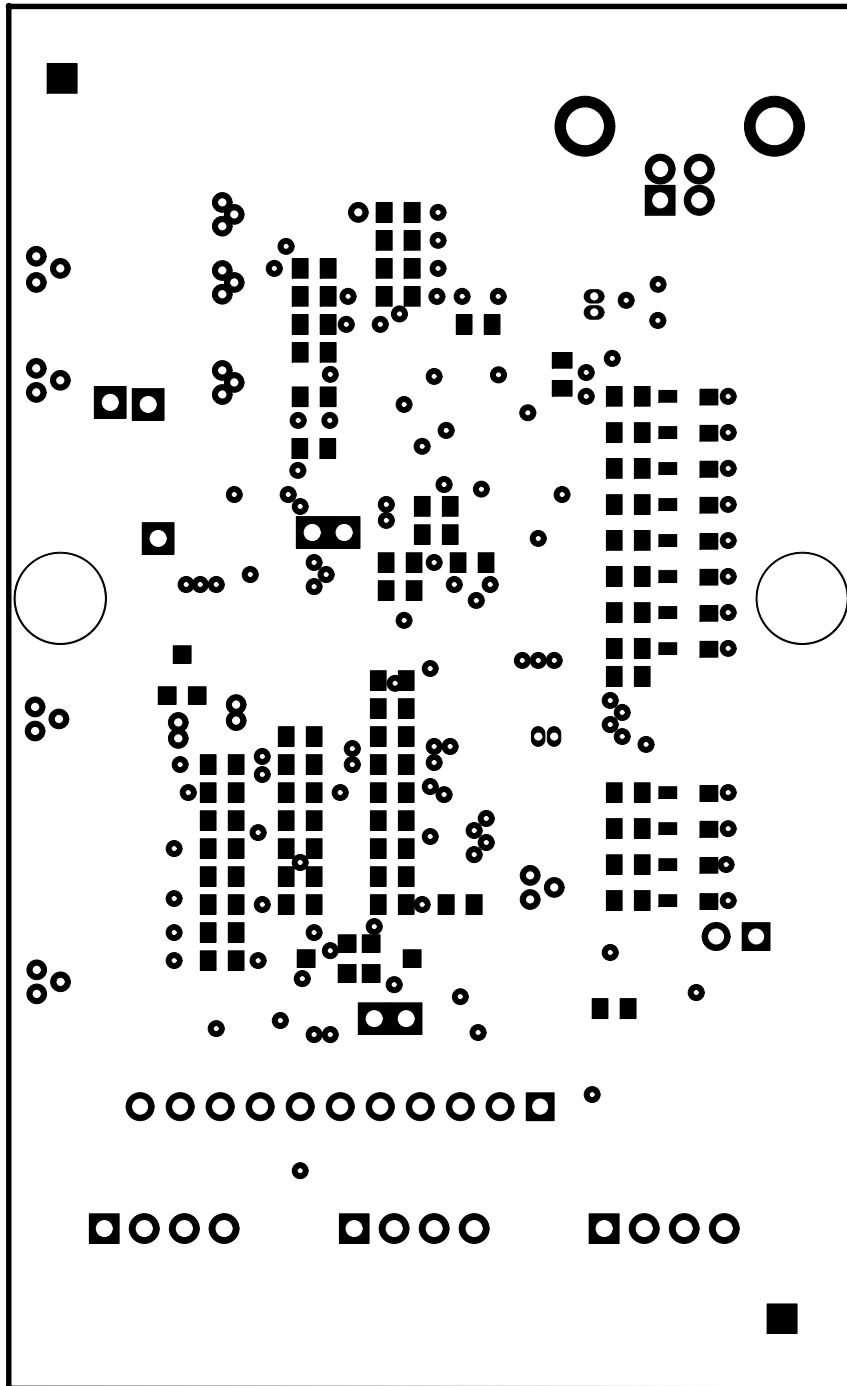


Figure 3-4. Board Layer 2

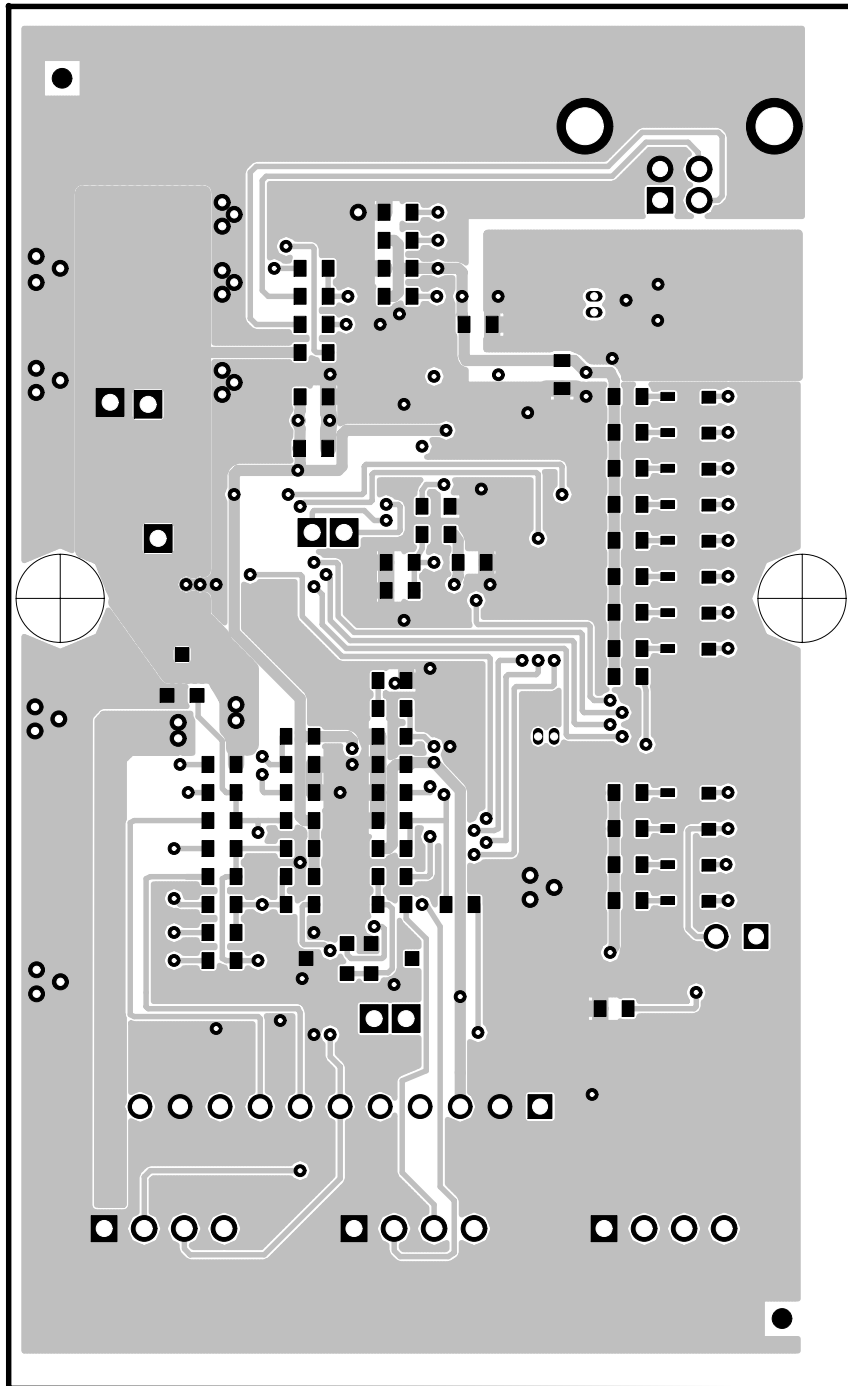


Figure 3-5. Component Placement 1

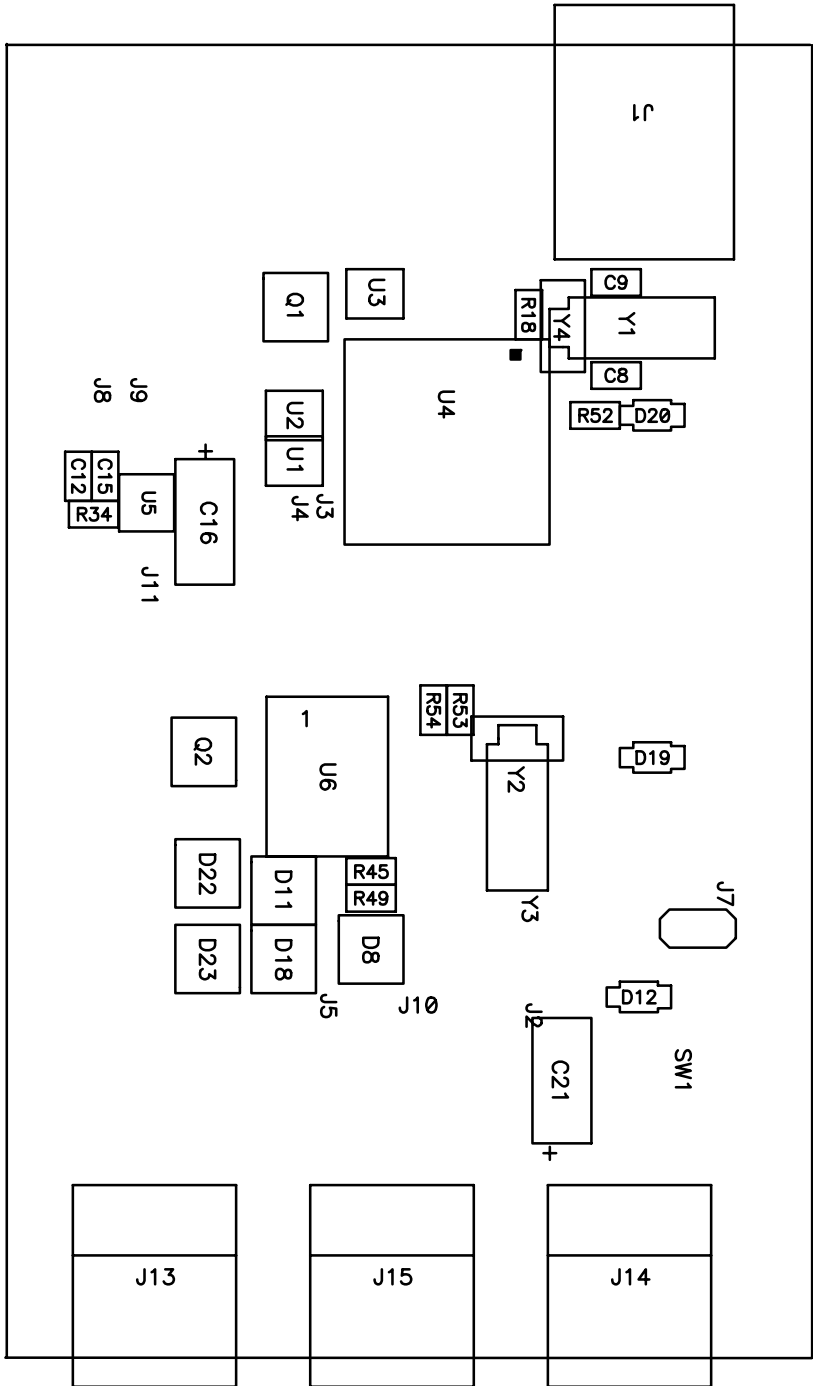


Figure 3-6. Component Placement 2

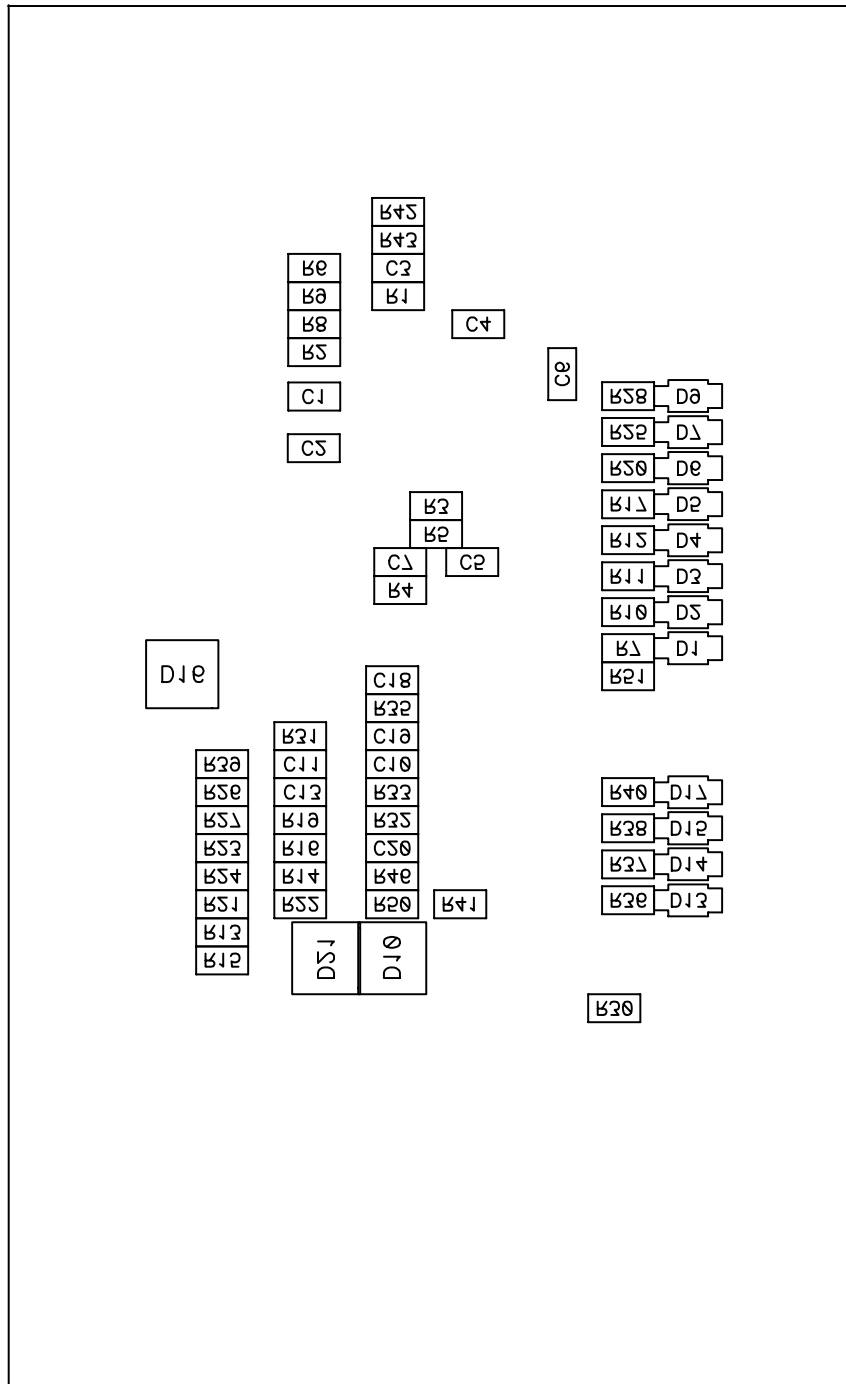


Figure 3-7. Internal Board Layer 1



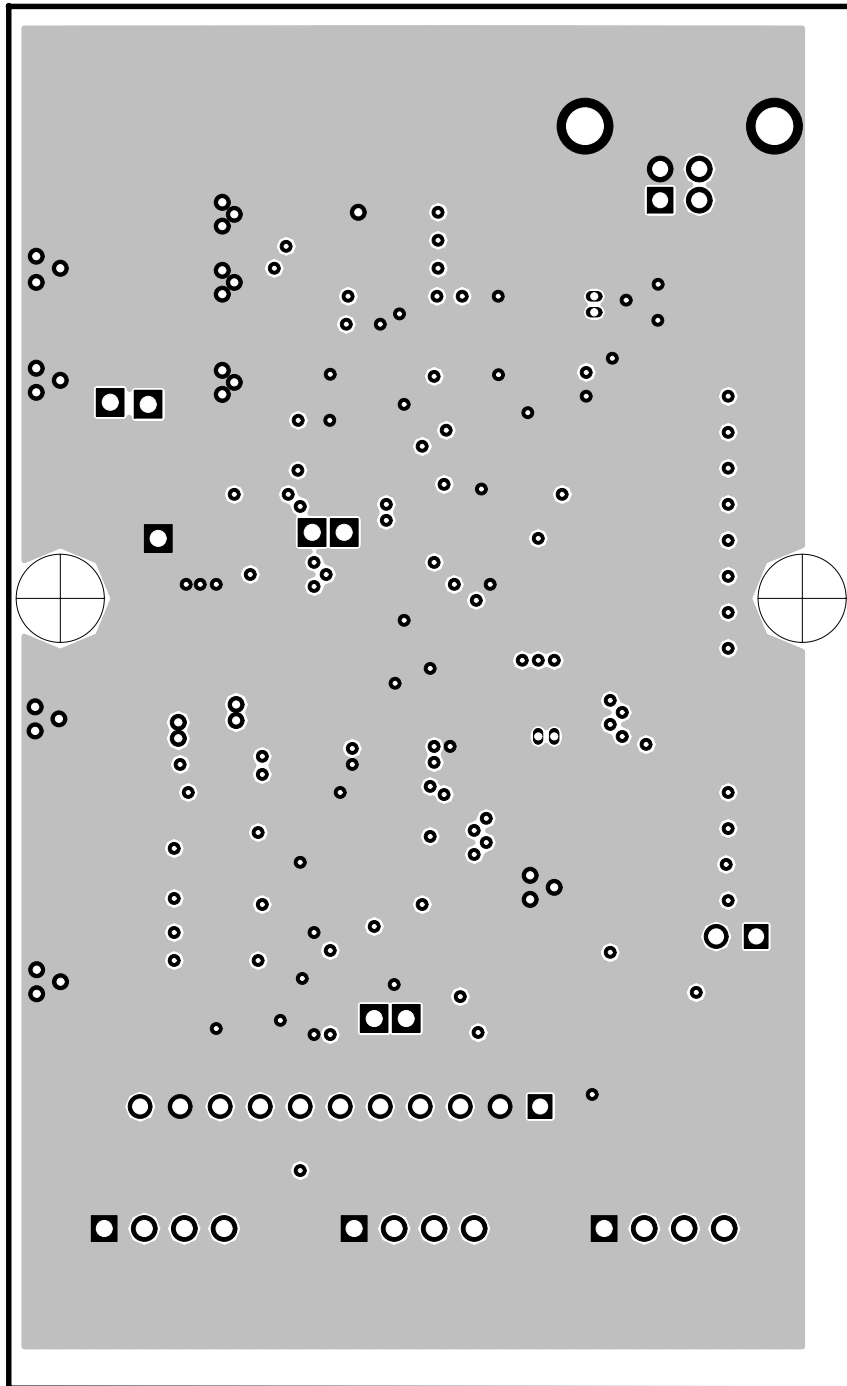




Figure 3-8. Internal Board Layer 2

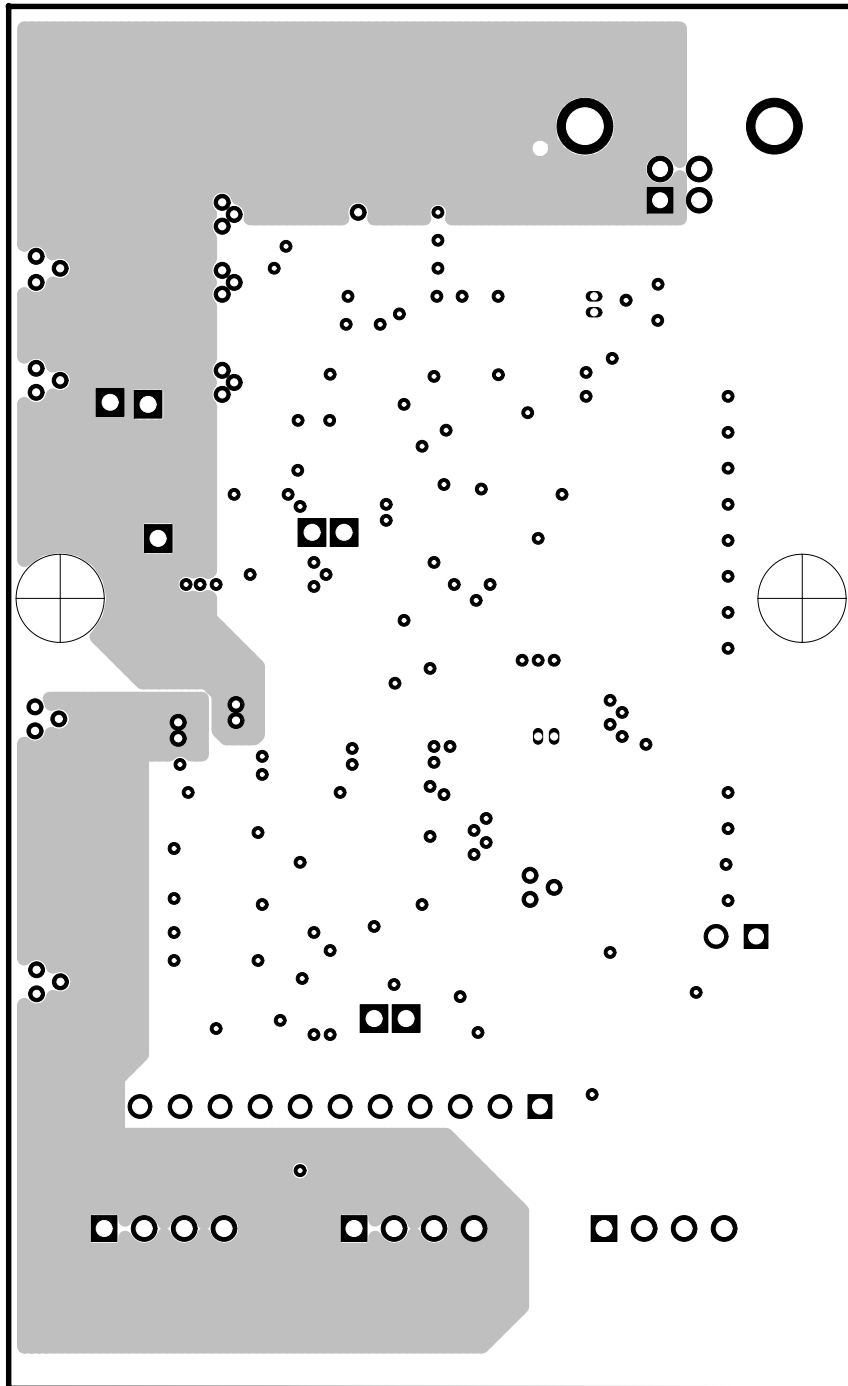

### **3.3 EV2300 Schematic**

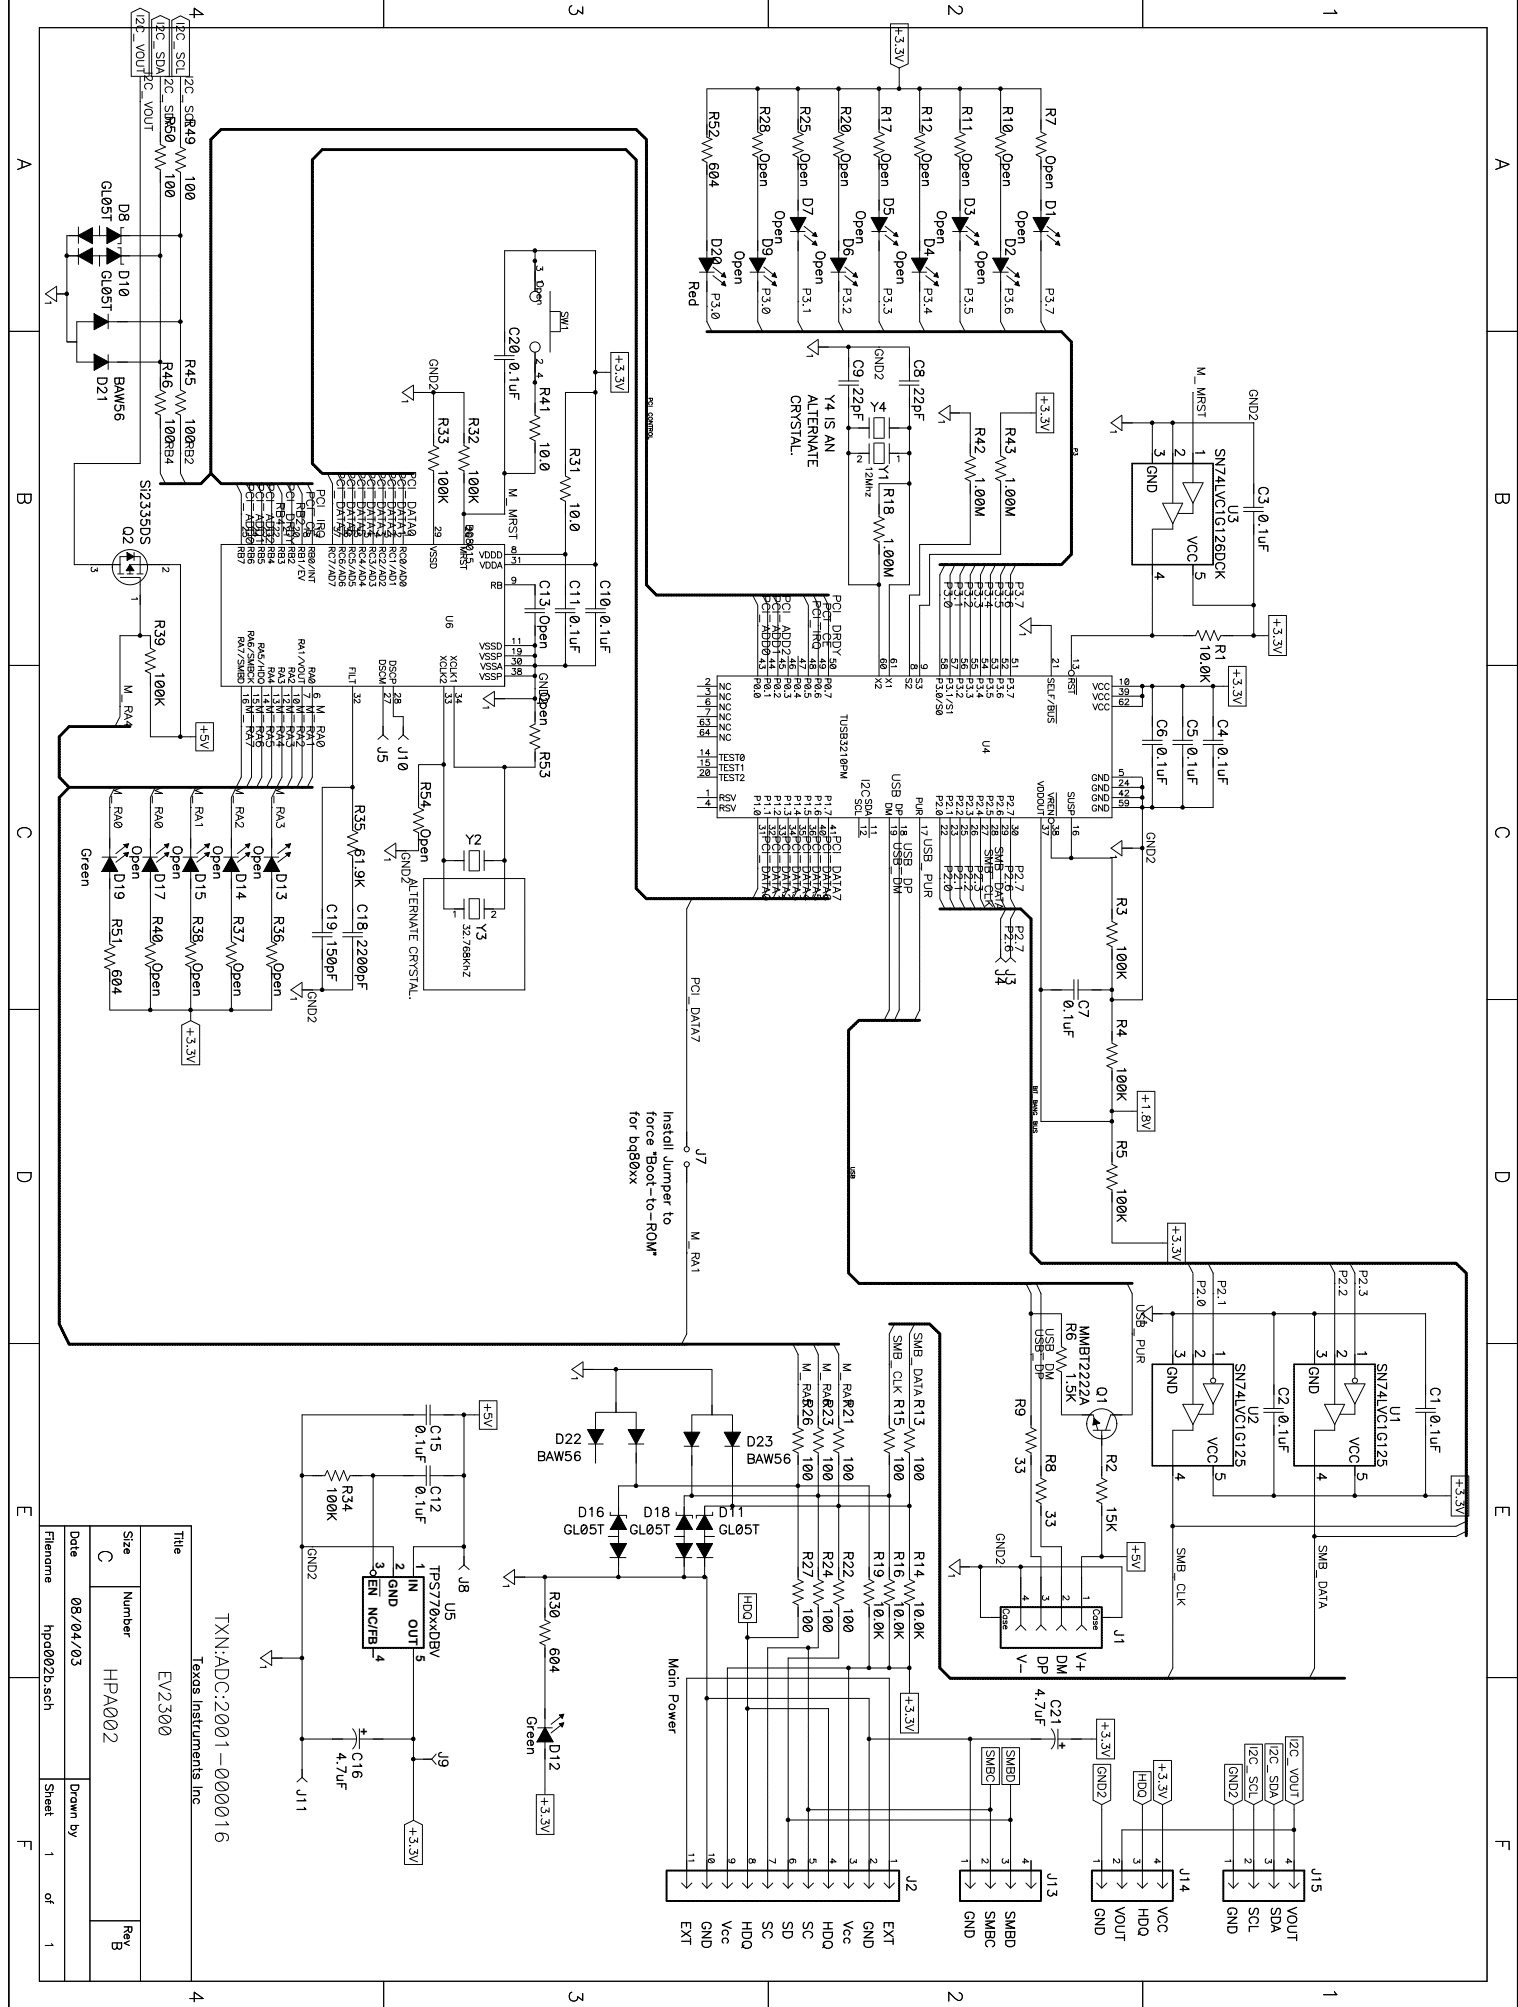

TXN:ADC2001-000016  
Texas Instruments Inc

Title		EV2300	
Size		C	
Number		HPA002	
Date		08/04/03	
Filename		hp0002b.sch	
Sheet		1 of 1	
Drawn by		Rev B	