

# AVR® JTAGICE mkII

## On-chip Debug System

### DEBUG AVR APPLICATIONS USING JTAG OR DEBUGWIRE INTERFACE

The AVR® JTAGICE mkII from Atmel® is a powerful development tool for On-chip Debugging of all AVR 8-bit RISC microcontrollers with IEEE 1149.1 compliant JTAG interface or debugWIRE Interface. DebugWIRE enables on chip debug of AVR microcontrollers in small pin count packages, using only a single wire for the debug interface. The JTAGICE mkII and the AVR Studio® user interface give the user complete control of the internal resources of the microcontroller, helping to reduce development time by making debugging easier. The JTAGICE mkII performs Real Time emulation of the microcontroller while it is running in a target system. The JTAGICE mkII provides emulation capability at a fraction of the cost of traditional emulators.



- AVR Studio Operated
- Full Emulation of All Analog and Digital Functions
- Full JTAG Programming Support
- Supports Multiple Devices in a JTAG Scan Chain
- USB 1.1 or RS-232 Interface to PC
- Full Support for Assembly and High Level Languages
- Program and Data Breakpoints
- All Operations and Breakpoints are Real Time
- Adapter for Direct Connection to STK500
- Upgrades are done from AVR Studio
- Target Voltage 1.8 – 5.5V
- Supply Voltage 9V – 12V, or Powered from USB port

## JTAGICE mkII AVR ON-CHIP DEBUG SYSTEM

**Corporate Headquarters**  
2325 Orchard Parkway  
San Jose, CA 95131  
USA  
TEL: (1)(408) 441-0311  
FAX: (1)(408) 487-2600

**Europe**  
Atmel Sarl  
Route des Arsenaux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
TEL: (41) 26-426-5555  
FAX: (41) 26-426-5500

**Asia**  
Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
TEL: (852) 2721-9778  
FAX: (852) 2722-1369


**Japan**  
9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
TEL: (81) 3-3523-3551  
FAX: (81) 3-3523-7581

**Web Site**  
<http://www.atmel.com>

The JTAGICE mkII allows access to all the powerful features of the AVR microcontroller. All AVR resources can be monitored: Flash memory, EEPROM memory, SRAM memory, Register File, Program Counter, Fuse and Lock Bits, and all I/O modules. The JTAGICE mkII also offers extensive On-chip Debug support for break conditions, including break on change of Program memory flow, Program memory Break Points on single address or address range, and Data memory Break Points on single address or address range.

The debugWIRE uses the Reset line for electrical connection; hence the system designer does not have to sacrifice I/O capabilities to take full advantage of the On-Chip-Debug system.

The JTAGICE mkII will automatically be upgraded by future AVR Studio releases to support future devices with JTAG and debugWIRE support as they are released.

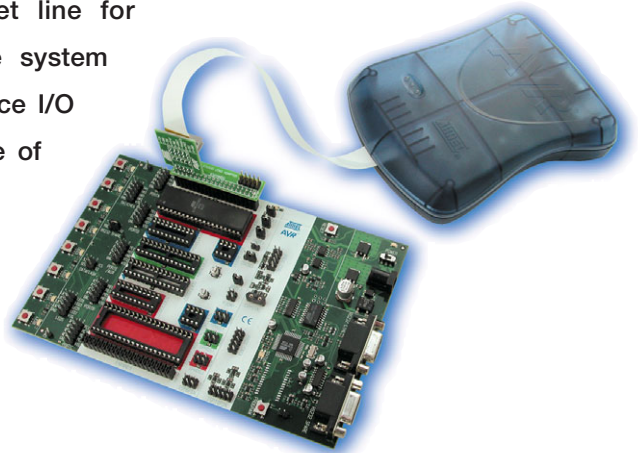

The JTAGICE mkII interface is integrated in AVR Studio, Atmel's front-end tool for development on the AVR architecture. All phases of the AVR development can be done in this Integrated Development Environment.

### Supported Devices

#### JTAG

ATmega16	ATmega6490
ATmega162	ATmega128
ATmega169	ATmega1281
ATmega32	ATmega1280
ATmega329	ATmega128CAN11
ATmega3290	ATmega256
ATmega64	ATmega2560
ATmega649	

#### DebugWIRE

ATtiny13
ATtiny2313
ATtiny25
ATtiny45
ATmega48
ATmega88
ATmega168

*Note: Low voltage devices are also supported.*

### Ordering Information

The JTAGICE is available from Atmel franchised distributors.

The ordering code is **ATJTAGICE2**

The latest version of AVR Studio is available free of charge from Atmel web site: [www.atmel.com](http://www.atmel.com)

The JTAGICE will automatically be upgraded by future AVR Studio releases to support future devices with JTAG support as they are released.



© Atmel Corporation 2004. All rights reserved. Atmel®, AVR®, AVR Studio®, are registered trademarks of Atmel. Other terms and product names may be trademarks of others.

2489D-AVR-02/04/0M