

MAXIM

MAX662A Evaluation Kit

Evaluates: MAX662A

General Description

The MAX662A evaluation kit (EV kit) is an assembled surface-mount board that allows easy evaluation of the MAX662A or MAX662. The EV kit schematic is the standard circuit shown in Figure 3a on page 5 of the MAX662A data sheet. A 3-pin jumper connector and a shunt are included to allow easy control of normal-operation and shutdown modes.

Ordering Information

PART	TEMP. RANGE	BOARD TYPE
MAX662AEVKIT-SO	0°C to +70°C	Surface Mount

Component List

DESIGNATION	QTY	DESCRIPTION
C1, C2	2	0.22 μ F ceramic SMD chip capacitors
C3	1	0.1 μ F ceramic SMD chip capacitor (MAX662 only)
C4, C5	2	4.7 μ F low-ESR tantalum capacitors
J1	1	3-pin jumper
None	1	Shunt
U1	1	MAX662ACSA
None	1	MAX662A data sheet
None	1	1.5" x 1.1" PC board

Operating Instructions

Pin 1 of the 3-pin jumper connector is tied to ground, pin 2 is tied to the SHDN pin of the MAX662A, and pin 3 is tied to VCC (Figure 1). Connect the jumper shunt across pins 1 and 2 of jumper connector J1 for normal operation. **Note: The MAX662A EV kit will be in shutdown mode if the jumper shunt is not inserted across J1. The SHDN pin has an internal pull-up to VCC, and therefore must be connected to ground for proper operation.** Connect the jumper shunt across jumper connector pins 2 and 3, or simply remove the jumper shunt to observe shutdown-mode operation.

Observe the power-supply input voltage limits specified in the data sheet. Do not short the output to ground. Also, do not excessively load the output—V_{OUT} should not fall below V_{CC}. If the above conditions are violated, the device may be damaged.

PC Board Layout

The EV kit printed circuit board layouts (Figures 2 and 3) can be copied directly and incorporated into production boards.

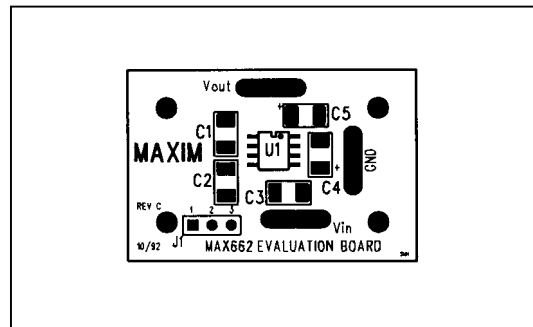


Figure 1. MAX662A EV Kit Surface-Mount Component Placement Diagram (1x scale)

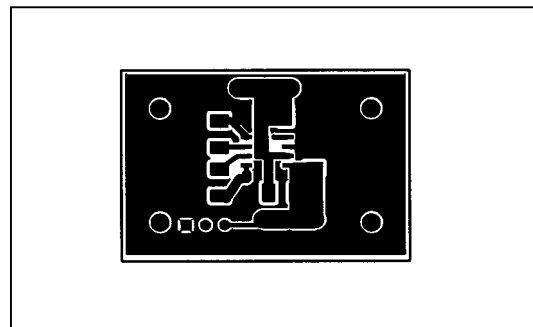


Figure 2. MAX662A EV Kit PC Board Layout—Component Side (1x scale)

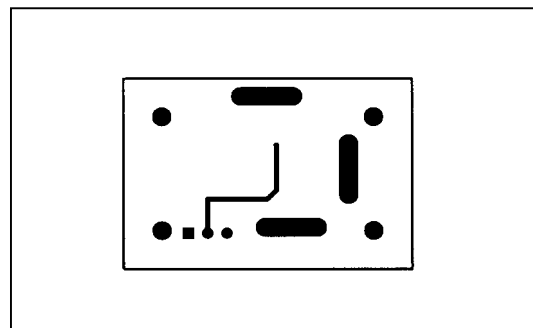


Figure 3. MAX662A EV Kit PC Board Layout—Solder Side (1x scale)

Evaluates: MAX662A

MAX662A Evaluation Kit

1994 EVALUATION KIT DATA BOOK FAXBACK OFFER



Accelerate your time to market with Maxim's evaluation kits (EV kits) that simplify design-in and prototyping. For your convenience, the *1994 Evaluation Kit Data Book* includes EV kit manuals and corresponding data sheets covering 95 products in one easy-to-use book. To receive your free data book, simply FAX this response card to your nearest Maxim office, or call toll-free 1-800-998-8800 (in the US only) for prompt fulfillment. We look forward to serving you.

FAX NUMBERS:

US (408) 737-7194 **Italy** (02) 99041981 **Japan** (03) 3232-6149
UK (0734) 84 38 63 **France** (1) 30 64 73 48 **Taiwan** (35) 777659
Germany (Maxim GmbH) (089) 8544239

My application is: |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_|

My end product is: |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_| |_|

Name _____ Title _____

Company _____

Address _____

City _____ State _____ Zip _____ Phone# _____

MAX662A EV DS REV 0

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

2 _____ Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

© 1994 Maxim Integrated Products Printed USA **MAXIM** is a registered trademark of Maxim Integrated Products.