

PROSLIC[®] PROGRAMMABLE CMOS SLIC/CODEC WITH RINGING/BATTERY VOLTAGE GENERATION

Features

- Performs all BORSCHT functions
- Software-programmable internal balanced ringing up to 90 V_{PK} (5 REN up to 4 kft, 3 REN up to 8 kft)
- Integrated battery supply with dynamic voltage output (Si3210)
 - On-chip dc-dc converter continuously minimizes power in all operating modes
 - Entire solution can be powered from a single 3.3 or 5 V supply
 - 3.3 to 35 V dc input range
 - Dynamic 0 to -94.5 V output
 - Low-cost inductor and high-efficiency transformer versions supported
- Software-programmable linefeed parameters
 - Ringing frequency, amplitude, cadence, and waveform
 - 2-wire ac impedance and hybrid
 - Constant current feed (20 to 41 mA)
 - Loop closure and ring trip thresholds and filtering
- Software-programmable signal generation and audio processing
 - DTMF generation and decoding
 - 12 kHz/16 kHz pulse metering generation
 - Phase-continuous FSK (caller ID) generation
 - Dual audio tone generators
 - Smooth and abrupt polarity reversal
 - μ -Law/A-Law and 16-bit linear PCM audio
- Extensive test and diagnostic features
 - Multiple voice loopback test modes
 - Real-time dc linefeed measurement
 - GR-909 line test capabilities
- SPI and PCM bus digital interfaces
- Extensive programmable interrupts
- 100% software-configurable global solution
- Ideal for customer premise equipment applications
- Pb-free and RoHS-compliant packages available



Applications

- Voice-over-broadband systems: DSL, codec, wireless
- PBX/IP-PBX/key telephone systems
- Terminal adapters: ISDN, Ethernet, USB

Description

The ProSLIC[®] is a low-voltage CMOS device that provides a complete analog telephone interface ideal for customer premise equipment (CPE) applications. The ProSLIC integrates a subscriber line interface circuit (SLIC), codec, and battery generation functionality into a single CMOS integrated circuit. The integrated battery supply continuously adapts its output voltage to minimize power and enables the entire solution to be powered from a single 3.3 V (Si3210M/Si3211M only) or 5 V supply. The ProSLIC controls the phone line through Silicon Labs' Si3201 Linefeed Interface Chip. Si3210 features include software-configurable 5 REN internal ringing up to 90 V_{PK}, DTMF generation and decoding, and a comprehensive set of telephony signaling capabilities for operation with only one hardware solution. The ProSLIC is packaged in a 38-pin QFN and TSSOP, and the Si3201 is packaged in a thermally-enhanced 16-pin SOIC.

Functional Block Diagram

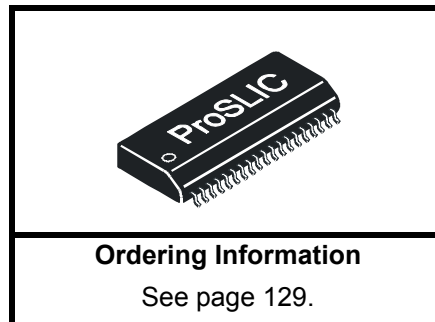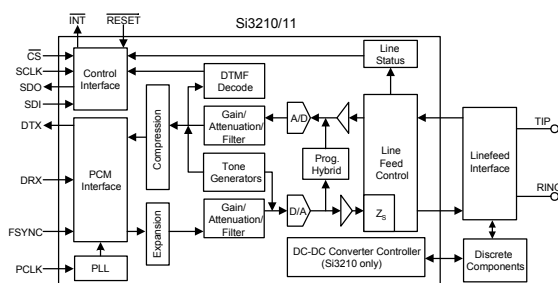

TSSOP Pin Assignments

Si3210/11

| | | | |
|-------------------|----|----|-------------------|
| CS | 1 | 38 | SCLK |
| INT | 2 | 37 | SDI |
| PCLK | 3 | 36 | SDO |
| DRX | 4 | 35 | SDITHRU |
| DTX | 5 | 34 | DCDRV/DCSW |
| FSYNC | 6 | 33 | DCFF/DOUT |
| RESET | 7 | 32 | TEST |
| SDCH/DIO1 | 8 | 31 | GNDD |
| SDCL/DIO2 | 9 | 30 | VDDD |
| V _{DDA1} | 10 | 29 | ITIPN |
| IREF | 11 | 28 | ITIPP |
| CAPP | 12 | 27 | V _{DDA2} |
| QGND | 13 | 26 | IRINGP |
| CAPM | 14 | 25 | IRINGN |
| STIPDC | 15 | 24 | IGMP |
| SRINGDC | 16 | 23 | GNDA |
| STIPE | 17 | 22 | IGMN |
| SVBAT | 18 | 21 | SRINGAC |
| SRINGE | 19 | 20 | STIPAC |

U.S. Patent #6,567,521

U.S. Patent #6,812,744

Other patents pending

TABLE OF CONTENTS

| <u>Section</u> | <u>Page</u> |
|---|--------------------|
| 1. Electrical Specifications | 4 |
| 2. Functional Description | 30 |
| 2.1. Linefeed Interface | 30 |
| 2.2. Battery Voltage Generation and Switching | 36 |
| 2.3. Tone Generation | 39 |
| 2.4. Ringing Generation | 42 |
| 2.5. Pulse Metering Generation | 46 |
| 2.6. DTMF Detection | 47 |
| 2.7. Audio Path | 48 |
| 2.8. Two-Wire Impedance Matching | 51 |
| 2.9. Clock Generation | 51 |
| 2.10. Interrupt Logic | 51 |
| 2.11. Serial Peripheral Interface | 52 |
| 2.12. PCM Interface | 55 |
| 2.13. Companding | 56 |
| 3. Control Registers | 59 |
| 4. Indirect Registers | 117 |
| 4.1. DTMF Decoding | 117 |
| 4.2. Oscillators | 119 |
| 4.3. Digital Programmable Gain/Attenuation | 121 |
| 4.4. SLIC Control | 122 |
| 4.5. FSK Control | 124 |
| 5. Pin Descriptions: Si3210/11 | 125 |
| 6. Pin Descriptions: Si3201 | 128 |
| 7. Ordering Guide | 129 |
| 8. Package Outline: 38-Pin QFN | 131 |
| 9. Package Outline: 38-Pin TSSOP | 132 |
| 10. Package Outline: 16-Pin ESOIC | 133 |
| Document Change List | 135 |
| Contact Information | 138 |

Si3210/Si3211

1. Electrical Specifications

Table 1. Absolute Maximum Ratings and Thermal Information¹

| Parameter | Symbol | Value | Unit |
|--|-------------------------------|---|------|
| Si3210/11 | | | |
| DC Supply Voltage | $V_{DDD}, V_{DDA1}, V_{DDA2}$ | -0.5 to 6.0 | V |
| Input Current, Digital Input Pins | I_{IN} | ±10 | mA |
| Digital Input Voltage | V_{IND} | -0.3 to ($V_{DDD} + 0.3$) | V |
| Operating Temperature Range ² | T_A | -40 to 100 | C |
| Storage Temperature Range | T_{STG} | -40 to 150 | C |
| TSSOP-38 Thermal Resistance, Typical | θ_{JA} | 70 | C/W |
| QFN-38 Thermal Resistance, Typical | θ_{JA} | 35 | C/W |
| Continuous Power Dissipation ² | P_D | 0.7 | W |
| Si3201 | | | |
| DC Supply Voltage | V_{DD} | -0.5 to 6.0 | V |
| Battery Supply Voltage | V_{BAT} | -104 | V |
| Input Voltage: TIP, RING, SRINGE, STIPE pins | V_{INHV} | ($V_{BAT} - 0.3$) to ($V_{DD} + 0.3$) | V |
| Input Voltage: ITIPP, ITIPN, IRINGP, IRINGN pins | V_{IN} | -0.3 to ($V_{DD} + 0.3$) | V |
| Operating Temperature Range ² | T_A | -40 to 100 | C |
| Storage Temperature Range | T_{STG} | -40 to 150 | C |
| SOIC-16 Thermal Resistance, Typical ³ | θ_{JA} | 55 | C/W |
| Continuous Power Dissipation ² | P_D | 0.8 at 70 °C | W |
| | | 0.6 at 85 °C | |
| Notes: | | | |
| <ol style="list-style-type: none"> 1. Permanent device damage may occur if the absolute maximum ratings are exceeded. Functional operation should be restricted to the conditions as specified in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. 2. Operation above 125 °C junction temperature may degrade device reliability. 3. Thermal resistance assumes a multilayer PCB with the exposed pad soldered to a topside PCB pad. | | | |

Table 2. Recommended Operating Conditions

| Parameter | Symbol | Test Condition | Min* | Typ | Max* | Unit |
|--------------------------|-------------------------------|----------------------|------|---------|------|------|
| Ambient Temperature | T_A | K-grade | 0 | 25 | 70 | °C |
| Ambient Temperature | T_A | B-grade | -40 | 25 | 85 | °C |
| Si3210/11 Supply Voltage | $V_{DDD}, V_{DDA1}, V_{DDA2}$ | | 3.13 | 3.3/5.0 | 5.25 | V |
| Si3201 Supply Voltage | V_{DD} | | 3.13 | 3.3/5.0 | 5.25 | V |
| Si3201 Battery Voltage | V_{BAT} | $V_{BATH} = V_{BAT}$ | -96 | — | -10 | V |

***Note:** All minimum and maximum specifications are guaranteed and apply across the recommended operating conditions. Typical values apply at nominal supply voltages and an operating temperature of 25 °C unless otherwise stated. Product specifications are only guaranteed for the typical application circuit (including component tolerances).

Table 3. AC Characteristics

($V_{DDA}, V_{DDD} = 3.13$ to 5.25 V, $T_A = 0$ to 70 °C for K-Grade, -40 to 85 °C for B-Grade)

| Parameter | Test Condition | Min | Typ | Max | Unit |
|---|---|------------|------|-------|----------|
| TX/RX Performance | | | | | |
| Overload Level | THD = 1.5% | 2.5 | — | — | V_{PK} |
| Single Frequency Distortion ¹ | 2-wire – PCM or PCM – 2-wire: 200 Hz–3.4 kHz | — | — | -45 | dB |
| Signal-to-(Noise + Distortion) Ratio ² | 200 Hz to 3.4 kHz D/A or A/D 8-bit Active off-hook, and OHT, any ZAC | Figure 1 | — | — | |
| Audio Tone Generator Signal-to-Distortion Ratio ² | 0 dBm0, Active off-hook, and OHT, any Zac | 45 | — | — | dB |
| Intermodulation Distortion | | — | — | -45 | dB |
| Gain Accuracy ² | 2-wire to PCM, 1014 Hz | -0.5 | 0 | 0.5 | dB |
| | PCM to 2-wire, 1014 Hz | -0.5 | 0 | 0.5 | dB |
| Gain Accuracy over Frequency | | Figure 3,4 | — | — | |
| Group Delay over Frequency | | Figure 5,6 | — | — | |
| Gain Tracking ³ | 1014 Hz sine wave, reference level -10 dBm signal level: 3 to -37 dB | -0.25 | — | 0.25 | dB |
| | -37 to -50 dB | -0.5 | — | 0.5 | dB |
| | -50 to -60 dB | -1.0 | — | 1.0 | dB |
| Round-Trip Group Delay | at 1000 Hz | — | 1100 | — | µs |
| Gain Step Accuracy | -6 to +6 dB | -0.017 | — | 0.017 | dB |

Si3210/Si3211

Table 3. AC Characteristics

(V_{DDA} , $V_{DDD} = 3.13$ to 5.25 V, $T_A = 0$ to 70 °C for K-Grade, -40 to 85 °C for B-Grade)

| Parameter | Test Condition | Min | Typ | Max | Unit |
|---|--|-------|-----|------|----------|
| Gain Variation with Temperature | All gain settings | -0.25 | — | 0.25 | dB |
| Gain Variation with Supply | $V_{DDA} = V_{DDD} = 3.3/5$ V $\pm 5\%$ | -0.1 | — | 0.1 | dB |
| 2-Wire Return Loss | 200 Hz to 3.4 kHz | 30 | 35 | — | dB |
| Transhybrid Balance | 300 Hz to 3.4 kHz | 30 | — | — | dB |
| Noise Performance | | | | | |
| Idle Channel Noise ⁴ | C-Message Weighted | — | — | 15 | dBmC |
| | Psophometric Weighted | — | — | -75 | dBmP |
| | 3 kHz flat | — | — | 18 | dBm |
| PSRR from VDDA | RX and TX, DC to 3.4 kHz | 40 | — | — | dB |
| PSRR from VDDD | RX and TX, DC to 3.4 kHz | 40 | — | — | dB |
| PSRR from VBAT | RX and TX, DC to 3.4 kHz | 40 | — | — | dB |
| Longitudinal Performance | | | | | |
| Longitudinal to Metallic or PCM Balance | 200 Hz to 3.4 kHz, $\beta_{Q1,Q2} \geq 150$, 1% mismatch | 56 | 60 | — | dB |
| | $\beta_{Q1,Q2} = 60$ to 240^5 | 43 | 60 | — | dB |
| | $\beta_{Q1,Q2} = 300$ to 800^5 | 53 | 60 | — | dB |
| | Using Si3201 | 53 | 60 | — | dB |
| Metallic to Longitudinal Balance | 200 Hz to 3.4 kHz | 40 | — | — | dB |
| Longitudinal Impedance | 200 Hz to 3.4 kHz at TIP or RING Register selectable ETBO/ETBA | | | | |
| | 00 | — | 33 | — | Ω |
| | 01 | — | 17 | — | Ω |
| | 10 | — | 17 | — | Ω |
| Longitudinal Current per Pin | Active off-hook 200 Hz to 3.4 kHz Register selectable ETBO/ETBA | | | | |
| | 00 | — | 4 | — | mA |
| | 01 | — | 8 | — | mA |
| | 10 | — | 12 | — | mA |

Notes:

1. The input signal level should be 0 dBm0 for frequencies greater than 100 Hz. For 100 Hz and below, the level should be -10 dBm0. The output signal magnitude at any other frequency will be smaller than the maximum value specified.
2. Analog signal measured as $V_{TIP} - V_{RING}$. Assumes ideal line impedance matching.
3. The quantization errors inherent in the μ/A -law companding process can generate slightly worse gain tracking performance in the signal range of 3 to -37 dB for signal frequencies that are integer divisors of the 8 kHz PCM sampling rate.
4. The level of any unwanted tones within the bandwidth of 0 to 4 kHz does not exceed -55 dBm.
5. Assumes normal distribution of betas.

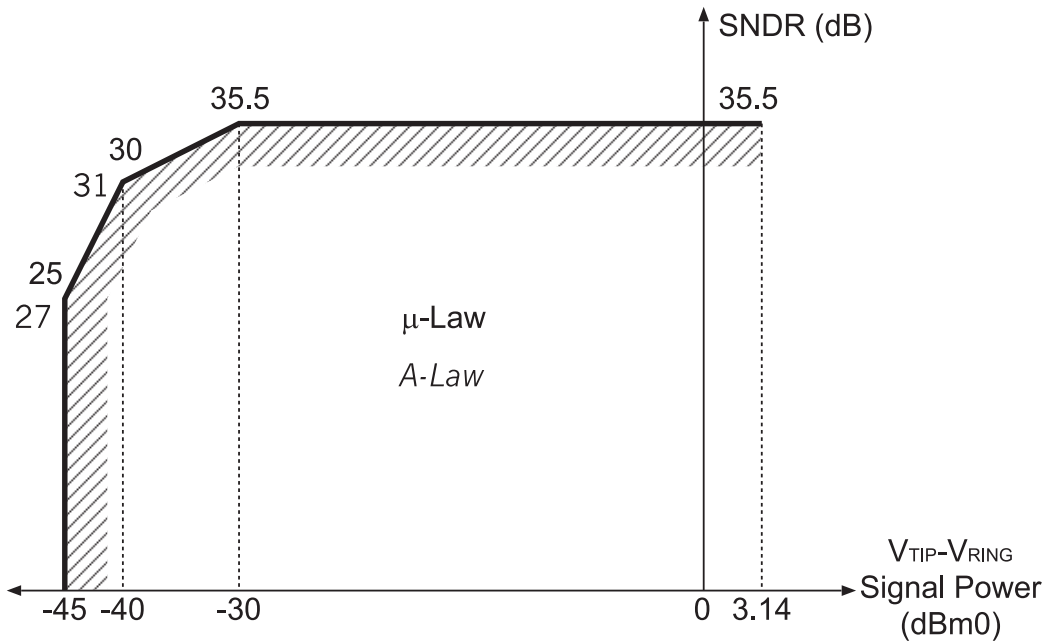


Figure 1. Transmit and Receive Path SNDR

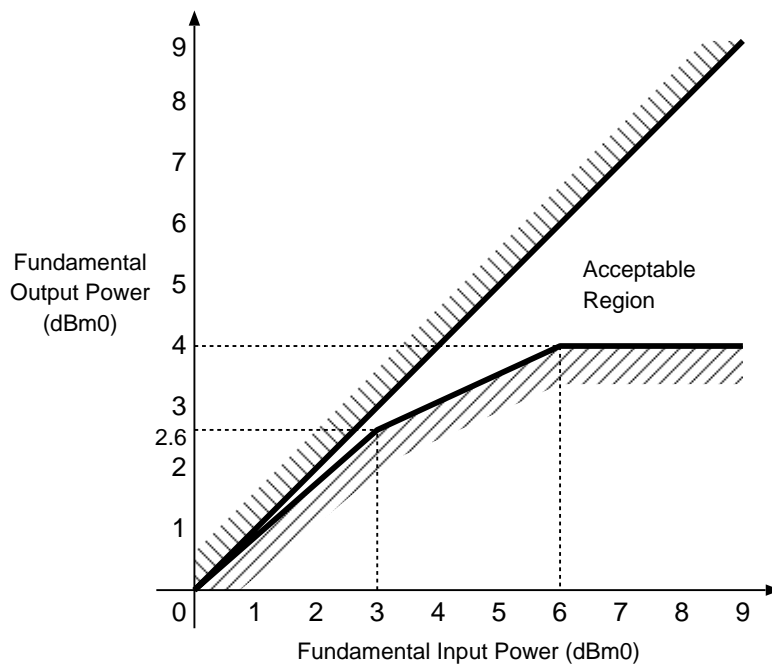


Figure 2. Overload Compression Performance

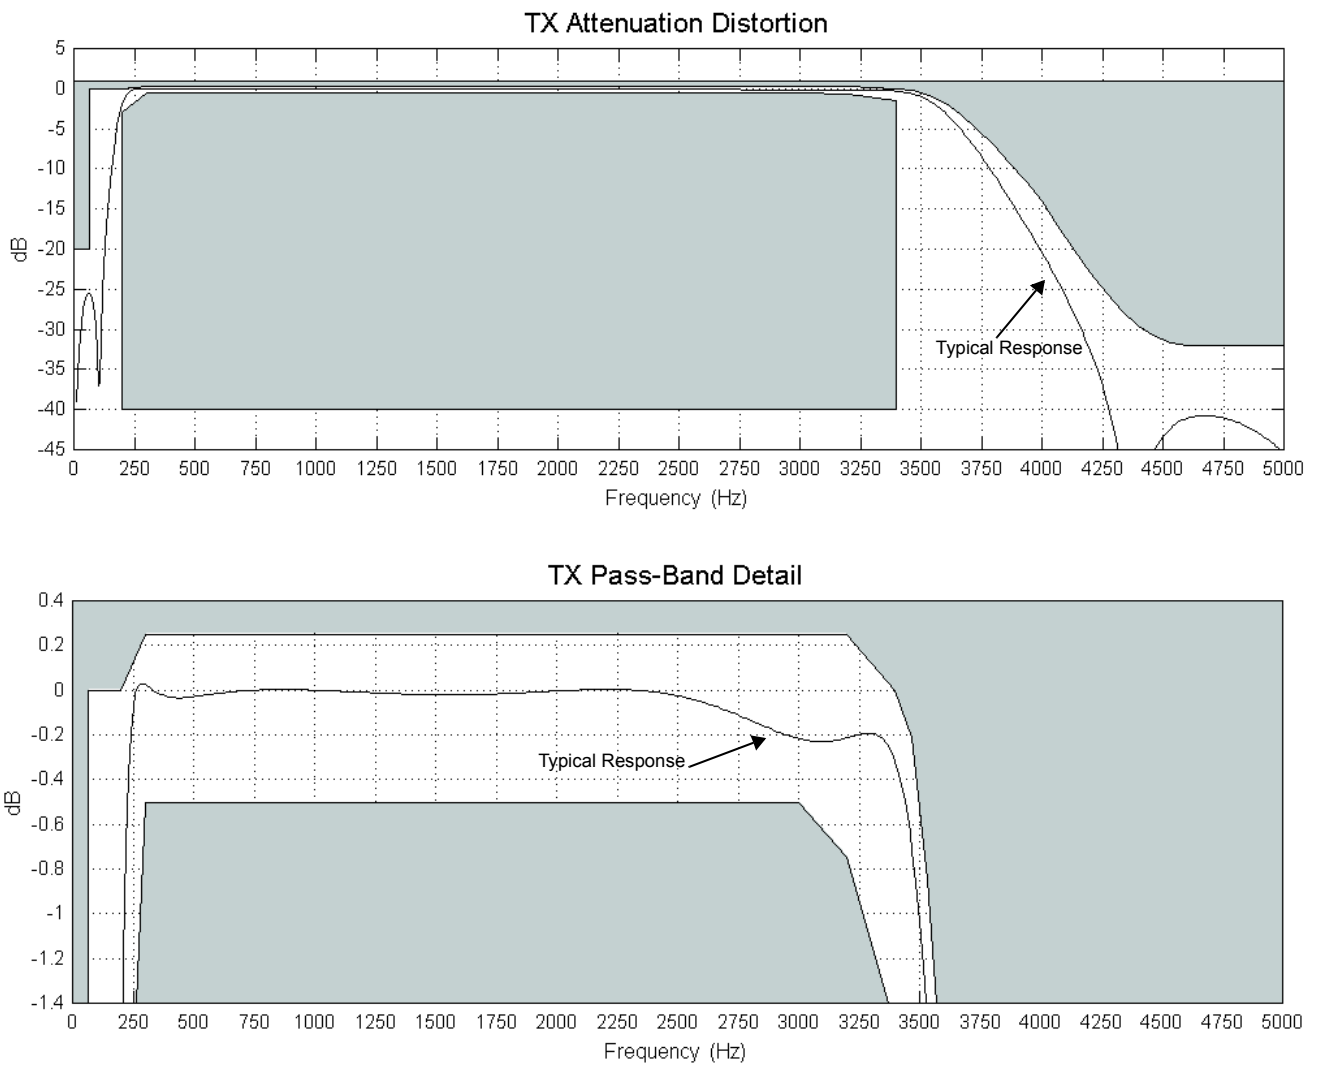


Figure 3. Transmit Path Frequency Response

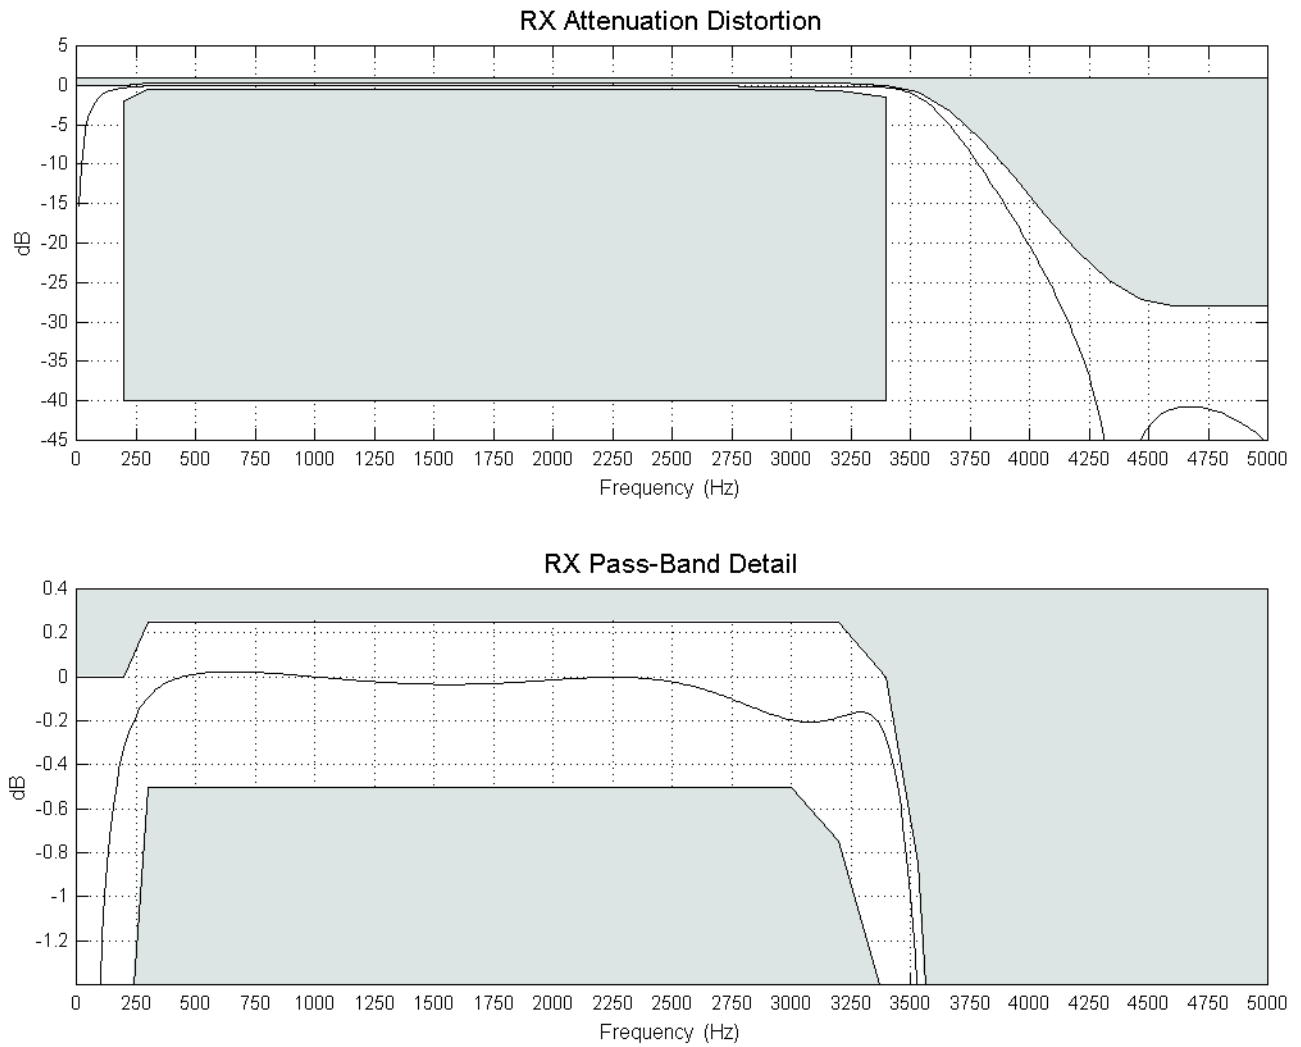


Figure 4. Receive Path Frequency Response

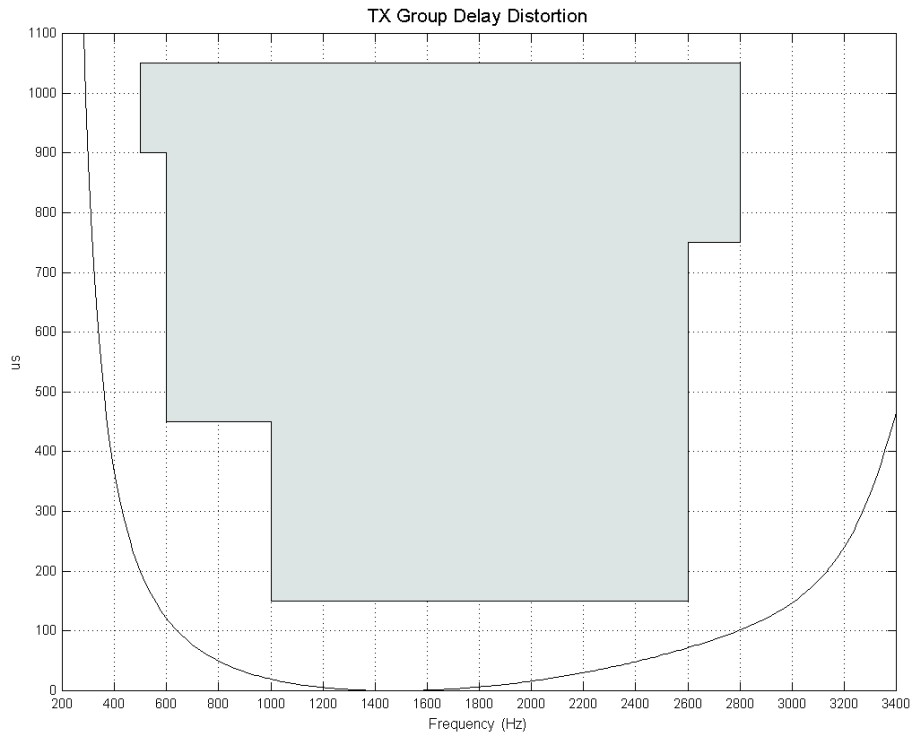


Figure 5. Transmit Group Delay Distortion

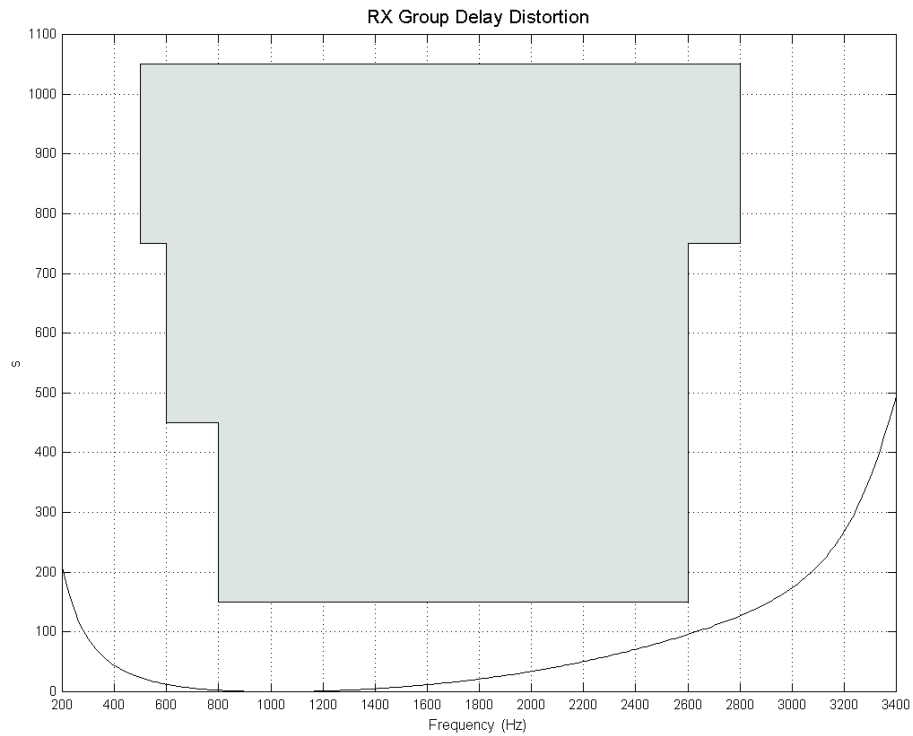


Figure 6. Receive Group Delay Distortion

Table 4. Linefeed Characteristics(V_{DDA}, V_{DDD} = 3.13 to 5.25 V, T_A = 0 to 70°C for K-Grade, -40 to 85°C for B-Grade)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|-------------------|---|------|-----|------|------------------|
| Loop Resistance Range* | R _{LOOP} | See *Note. | 0 | — | 160 | Ω |
| DC Loop Current Accuracy | | I _{LIM} = 29 mA, ETBA = 4 mA | -10 | — | 10 | % |
| DC Open Circuit Voltage Accuracy | | Active Mode; V _{OC} = 48 V, V _{TIP} - V _{RING} | -4 | — | 4 | V |
| DC Differential Output Resistance | R _{DO} | I _{LOOP} < I _{LIM} | — | 160 | — | Ω |
| DC Open Circuit Voltage—Ground Start | V _{OCTO} | I _{RING} < I _{LIM} ; V _{RING} wrt ground V _{OC} = 48 V | -4 | — | 4 | V |
| DC Output Resistance—Ground Start | R _{ROTO} | I _{RING} < I _{LIM} ; RING to ground | — | 160 | — | Ω |
| DC Output Resistance—Ground Start | R _{TOTO} | TIP to ground | 150 | — | — | kΩ |
| Loop Closure/Ring Ground Detect Threshold Accuracy | | I _{THR} = 11.43 mA | -20 | — | 20 | % |
| Ring Trip Threshold Accuracy | | I _{THR} = 40.64 mA | -10 | — | 10 | % |
| Ring Trip Response Time | | User Programmable Register 70 and Indirect Register 36 | — | — | — | |
| Ring Amplitude | V _{TR} | 5 REN load; sine wave; R _{LOOP} = 160 Ω, V _{BAT} = -75 V | 44 | — | — | V _{rms} |
| Ring DC Offset | R _{OS} | Programmable in Indirect Register 19 | 0 | — | — | V |
| Trapezoidal Ring Crest Factor Accuracy | | Crest factor = 1.3 | -.05 | — | .05 | |
| Sinusoidal Ring Crest Factor | R _{CF} | | 1.35 | — | 1.45 | |
| Ringing Frequency Accuracy | | f = 20 Hz | -1 | — | 1 | % |
| Ringing Cadence Accuracy | | Accuracy of ON/OFF Times | -50 | — | 50 | ms |
| Calibration Time | | ↑CAL to ↓CAL Bit | — | — | 600 | ms |
| Power Alarm Threshold Accuracy | | At Power Threshold = 300 mW | -25 | — | 25 | % |

*Note: DC resistance round trip; 160 Ω corresponds to 2 kft, 26 gauge AWG.

Si3210/Si3211

Table 5. Monitor ADC Characteristics

($V_{DDA}, V_{DDD} = 3.13$ to 5.25 V, $T_A = 0$ to 70 °C for K-Grade, -40 to 85 °C for B-Grade)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|--|--------|----------------|------|-----|-----|------|
| Differential Nonlinearity (6-bit resolution) | DNLE | | -1/2 | — | 1/2 | LSB |
| Integral Nonlinearity (6-bit resolution) | INLE | | -1 | — | 1 | LSB |
| Gain Error (Voltage) | | | — | — | 10 | % |
| Gain Error (Current) | | | — | — | 20 | % |

Table 6. Si321x DC Characteristics, $V_{DDA} = V_{DDD} = 5.0$ V

($V_{DDA}, V_{DDD} = 4.75$ to 5.25 V, $T_A = 0$ to 70 °C for K-Grade, -40 to 85 °C for B-Grade)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------|----------|--|----------------------|-----|----------------------|---------|
| High Level Input Voltage | V_{IH} | | $0.7 \times V_{DDD}$ | — | — | V |
| Low Level Input Voltage | V_{IL} | | — | — | $0.3 \times V_{DDD}$ | V |
| High Level Output Voltage | V_{OH} | DIO1,DIO2,SDITHRU: $I_O = -4$ mA SDO, DTX: $I_O = -8$ mA | $V_{DDD} - 0.6$ | — | — | V |
| | | DOUT: $I_O = -40$ mA | $V_{DDD} - 0.8$ | — | — | V |
| Low Level Output Voltage | V_{OL} | DIO1,DIO2,DOUT,SDITHRU: $I_O = 4$ mA SDO,INT,DTX: $I_O = 8$ mA | — | — | 0.4 | V |
| Input Leakage Current | I_L | | -10 | — | 10 | μ A |

Table 7. Si321x DC Characteristics, $V_{DDA} = V_{DDD} = 3.3$ V

($V_{DDA}, V_{DDD} = 3.13$ to 3.47 V, $T_A = 0$ to 70 °C for K-Grade, -40 to 85 °C for B-Grade)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------|----------|--|----------------------|-----|----------------------|---------|
| High Level Input Voltage | V_{IH} | | $0.7 \times V_{DDD}$ | — | — | V |
| Low Level Input Voltage | V_{IL} | | — | — | $0.3 \times V_{DDD}$ | V |
| High Level Output Voltage | V_{OH} | DIO1,DIO2,SDITHRU: $I_O = -2$ mA SDO, DTX: $I_O = -4$ mA | $V_{DDD} - 0.6$ | — | — | V |
| | | DOUT: $I_O = -40$ mA | $V_{DDD} - 0.8$ | — | — | V |
| Low Level Output Voltage | V_{OL} | DIO1,DIO2,DOUT,SDITHRU: $I_O = 2$ mA SDO,INT,DTX: $I_O = 4$ mA | — | — | 0.4 | V |
| Input Leakage Current | I_L | | -10 | — | 10 | μ A |

Table 8. Power Supply Characteristics(V_{DDA}, V_{DDD} = 3.13 to 5.25 V, T_A = 0 to 70 °C for K-Grade, -40 to 85 °C for B-Grade)

| Parameter | Symbol | Test Condition | Typ ¹ | Typ ² | Max | Unit |
|---|---------------------------------|---|------------------|------------------|-----|------|
| Power Supply Current, Analog and Digital | I _A + I _D | Sleep ($\overline{\text{RESET}} = 0$) | 0.1 | 0.13 | 0.3 | mA |
| | | Open | 33 | 42.8 | 49 | mA |
| | | Active on-hook ETBO = 4 mA, codec and Gm amplifier powered down | 37 | 53 | 68 | mA |
| | | Active OHT ETBO = 4 mA | 57 | 72 | 83 | mA |
| | | Active off-hook ETBA = 4 mA, I _{LIM} = 20 mA | 73 | 88 | 99 | mA |
| | | Ground Start | 36 | 47 | 55 | mA |
| | | Ringing sinewave, REN = 1, V _{PK} = 56 V | 45 | 55 | 65 | mA |
| V _{DD} Supply Current (Si3201) | I _{VDD} | Sleep mode, RESET = 0 | 100 | 100 | — | μA |
| | | Open (high impedance) | 100 | 100 | — | μA |
| | | Active on-hook standby | 110 | 110 | — | μA |
| | | Forward/reverse active off-hook, no I _{LOOP} , ETBO = 4 mA, V _{BAT} = -24 V | 1 | 1 | — | mA |
| | | Forward/reverse OHT, ETBO = 4 mA, V _{BAT} = -70 V | 1 | 1 | — | mA |
| V _{BAT} Supply Current ³ | I _{BAT} | Sleep ($\overline{\text{RESET}} = 0$) | 0 | 0 | — | mA |
| | | Open (DCOF = 1) | 0 | 0 | — | mA |
| | | Active on-hook V _{OC} = 48 V, ETBO = 4 mA | 3 | 3 | — | mA |
| | | Active OHT ETBO = 4 mA | 11 | 11 | — | mA |
| | | Active off-hook ETBA = 4 mA, I _{LIM} = 20 mA | 30 | 30 | — | mA |
| | | Ground Start | 2 | 2 | — | mA |
| | | Ringing: V _{PK_RING} = 56 V _{PK} , Sinewave ringing: REN = 1 | 5.5 | 5.5 | — | mA |
| V _{BAT} Supply Slew Rate | | When using Si3201 | — | — | 10 | V/μs |
| Notes: | | | | | | |
| 1. V _{DDD} , V _{DDA} = 3.3 V. | | | | | | |
| 2. V _{DDD} , V _{DDA} = 5.25 V. | | | | | | |
| 3. I _{BAT} = current from V _{BAT} (the large negative supply). For a switched-mode power supply regulator efficiency of 71%, the user can calculate the regulator current consumption as I _{BAT} × V _{BAT} / (0.71 × V _{DC}). | | | | | | |

Si3210/Si3211

Table 9. Switching Characteristics (General Inputs)

$V_{DDA} = V_{DDA} = 3.13$ to 5.25 V, $T_A = 0$ to 70 °C for K-Grade, -40 to 85 °C for B-Grade, $C_L = 20$ pF)


| Parameter | Symbol | Min | Typ | Max | Unit |
|---------------------------------------|----------|-----|-----|-----|------|
| Rise Time, $\overline{\text{RESET}}$ | t_r | — | — | 20 | ns |
| $\overline{\text{RESET}}$ Pulse Width | t_{rl} | 100 | — | — | ns |

Note: All timing (except rise and fall time) is referenced to the 50% level of the waveform. Input test levels are $V_{IH} = V_D - 0.4$ V, $V_{IL} = 0.4$ V. Rise and fall times are referenced to the 20% and 80% levels of the waveform.

Table 10. Switching Characteristics (SPI)
 $V_{DDA} = V_{DDA} = 3.13$ to 5.25 V, $T_A = 0$ to 70 °C for K-Grade, -40 to 85 °C for B-Grade, $C_L = 20$ pF

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---|-----------|-----------------|-------|-----|-----|---------|
| Cycle Time SCLK | t_c | | 0.062 | — | — | μ s |
| Rise Time, SCLK | t_r | | — | — | 25 | ns |
| Fall Time, SCLK | t_f | | — | — | 25 | ns |
| Delay Time, SCLK Fall to SDO Active | t_{d1} | | — | — | 20 | ns |
| Delay Time, SCLK Fall to SDO Transition | t_{d2} | | — | — | 20 | ns |
| Delay Time, \overline{CS} Rise to SDO Tri-state | t_{d3} | | — | — | 20 | ns |
| Setup Time, \overline{CS} to SCLK Fall | t_{su1} | | 25 | — | — | ns |
| Hold Time, \overline{CS} to SCLK Rise | t_{h1} | | 20 | — | — | ns |
| Setup Time, SDI to SCLK Rise | t_{su2} | | 25 | — | — | ns |
| Hold Time, SDI to SCLK Rise | t_{h2} | | 20 | — | — | ns |
| Delay Time between Chip Selects (Continuous SCLK) | t_{cs} | | 440 | — | — | ns |
| Delay Time between Chip Selects (Non-continuous SCLK) | t_{cs} | | 220 | — | — | ns |
| SDI to SDITHRU Propagation Delay | t_{d4} | | — | 4 | 10 | ns |

Note: All timing is referenced to the 50% level of the waveform. Input test levels are $V_{IH} = V_{DD} - 0.4$ V, $V_{IL} = 0.4$ V

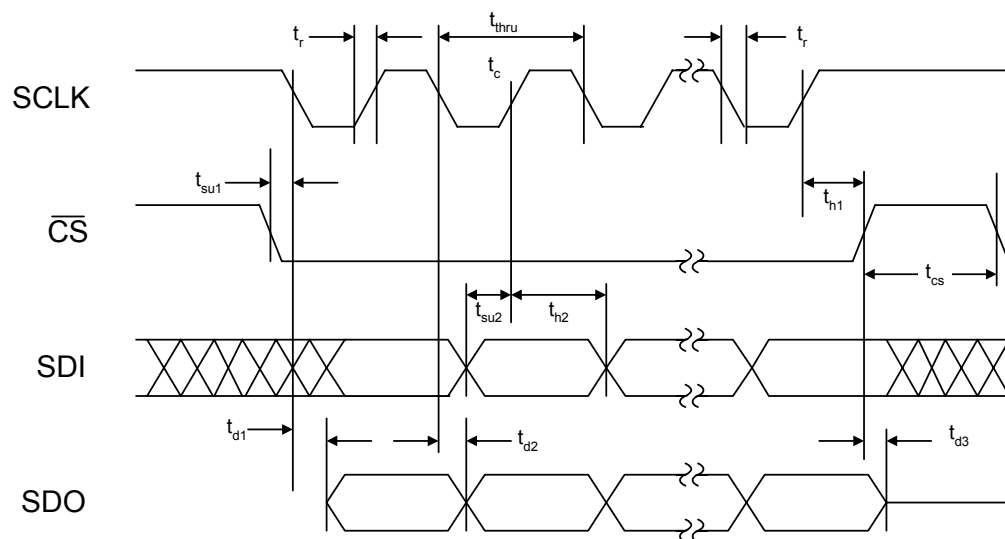**Figure 7. SPI Timing Diagram**

Si3210/Si3211

Table 11. Switching Characteristics—PCM Highway Serial Interface

$V_D = 3.13$ to 5.25 V, $T_A = 0$ to 70 °C for K-Grade, -40 to 85 °C for B-Grade, $C_L = 20$ pF

| Parameter | Symbol | Test Conditions | Min ¹ | Typ ¹ | Max ¹ | Units |
|---|--------------|-----------------|------------------|--------------------|------------------|-------|
| PCLK Frequency | $1/t_c$ | | — | 0.256 | — | MHz |
| | | | — | 0.512 | — | MHz |
| | | | — | 0.768 ² | — | MHz |
| | | | — | 1.024 | — | MHz |
| | | | — | 1.536 ² | — | MHz |
| | | | — | 2.048 | — | MHz |
| | | | — | 4.096 | — | MHz |
| | | | — | 8.192 | — | MHz |
| PCLK Duty Cycle Tolerance | t_{dty} | | 40 | 50 | 60 | % |
| PCLK-to-FSYNC Jitter Tolerance | t_{jitter} | | -120 | — | 120 | ns |
| Rise Time, PCLK | t_r | | — | — | 25 | ns |
| Fall Time, PCLK | t_f | | — | — | 25 | ns |
| Delay Time, PCLK Rise to DTX Active | t_{d1} | | — | — | 20 | ns |
| Delay Time, PCLK Rise to DTX Transition | t_{d2} | | — | — | 20 | ns |
| Delay Time, PCLK Rise to DTX Tri-state ³ | t_{d3} | | — | — | 20 | ns |
| Setup Time, FSYNC to PCLK Fall | t_{su1} | | 25 | — | — | ns |
| Hold Time, FSYNC to PCLK Fall | t_{h1} | | 20 | — | — | ns |
| Setup Time, DRX to PCLK Fall | t_{su2} | | 25 | — | — | ns |
| Hold Time, DRX to PCLK Fall | t_{h2} | | 20 | — | — | ns |

Notes:

1. All timing is referenced to the 50% level of the waveform. Input test levels are $V_{IH} - V_{IO} - 0.4V$, $V_{IL} = 0.4$ V.
2. Not a valid PCLK frequency for GCI mode.
3. Specification applies to PCLK fall to DTX tri-state when that mode is selected ($TRI = 0$).


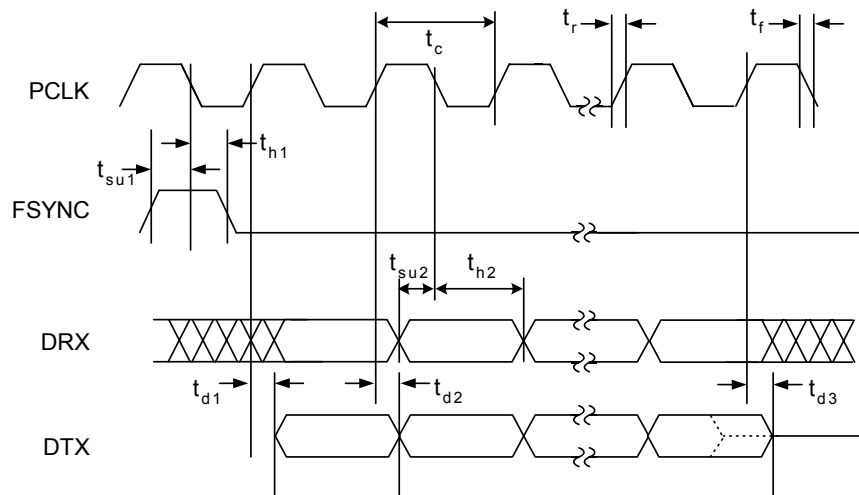


Figure 8. PCM Highway Interface Timing Diagram

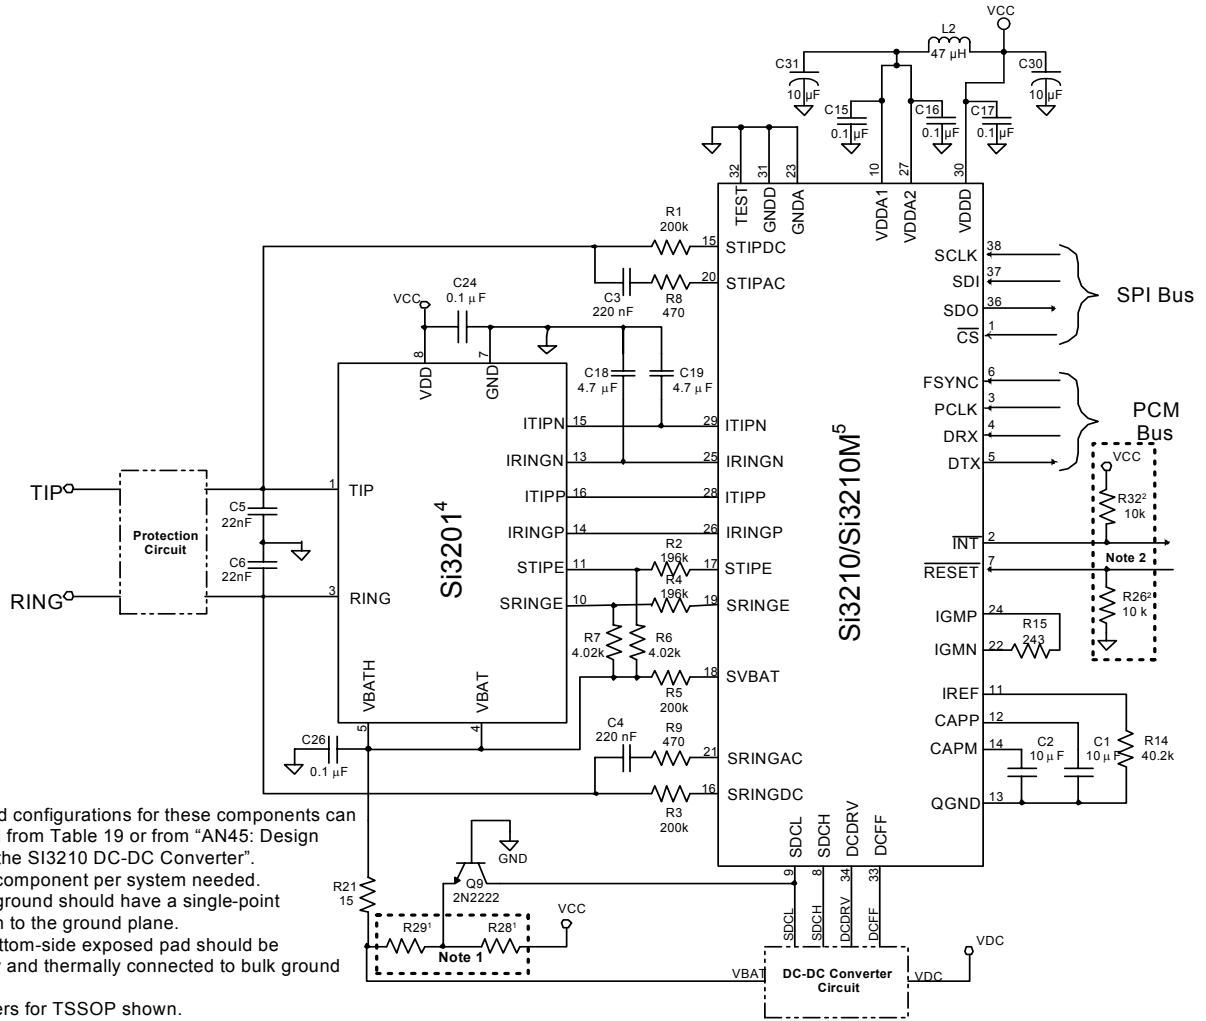

Notes:

1. Values and configurations for these components can be derived from Table 19 or from "AN45: Design Guide for the Si3210 DC-DC Converter".
2. Only one component per system needed.
3. All circuit ground should have a single-point connection to the ground plane.
4. Si3201 bottom-side exposed pad should be electrically and thermally connected to bulk ground plane.
5. Pin numbers for TSSOP shown.

Figure 9. Si3210/Si3210M Application Circuit Using Si3201


Si3210/Si3211

Table 12. Si3210/Si3210M + Si3201 External Component Values

| Component(s) | Value | Package | Supplier |
|---|--|---------|--|
| C1,C2 | 10 μ F, 6 V Ceramic or 16 V Low Leakage Electrolytic, \pm 20% | Radial | Murata, Nichicon URL1C100MD |
| C3,C4 | 220 nF, 100 V, X7R, \pm 20% | 1812 | Murata, Johanson, Novacap, Venkel |
| C5,C6 | 22 nF, 100 V, X7R, \pm 20% | 1206 | Murata, Johanson, Novacap, Venkel |
| C15,C16,C17,C24 | 0.1 μ F, 6 V, Y5V, \pm 20% | 603 | Murata, Johanson, Novacap, Venkel |
| C18,C19 | 4.7 μ F, ceramic, 6 V, X7R, \pm 20% | 1206 | Murata, Johanson, Novacap, Venkel |
| C26 | 0.1 μ F, 100 V, X7R, \pm 20% | 1210 | Murata, Johanson, Novacap, Venkel |
| C30,C31 | 10 μ F, 10 V, Electrolytic, \pm 20% | Radial | Panasonic |
| L2 | 47 μ H, 150 mA | SMD | Coilcraft |
| R1 ¹ ,R3 ¹ ,R5 ¹ | 200 k Ω , 1/10 W, \pm 1% | 805 | |
| R2 ¹ ,R4 ¹ | 196 k Ω , 1/10 W, \pm 1% | 805 | |
| R6,R7 | 4.02 k Ω , 1/10 W, \pm 1% | 805 | |
| R8,R9 | 470 Ω , 1/10 W, \pm 1% | 805 | |
| R14 | 40.2 k Ω , 1/10 W, \pm 1% | 805 | |
| R15 | 243 Ω , 1/10 W, \pm 1% | 805 | |
| R21 | 15 Ω , 1/4 W, \pm 5% | 805 | |
| R26 ² | 10 k Ω , 1/10 W, \pm 1% | 805 | |
| R28,R29 | 1/10 W, 1% (See "AN45: Design Guide for the Si3210 DC-DC Converter" or Table 19 for value selection) | 805 | |
| R32 ² | 10 k Ω , 1/10 W, \pm 5% | 805 | |
| Q9 | 60 V, General Purpose Switching NPN | SOT-23 | ON Semi MMBT2222ALT1; Central Semi CMPT2222A; Zetex FMMT2222 |

Notes:

1. These resistors must be in an 0805 or larger package.
2. Only one component per system needed.

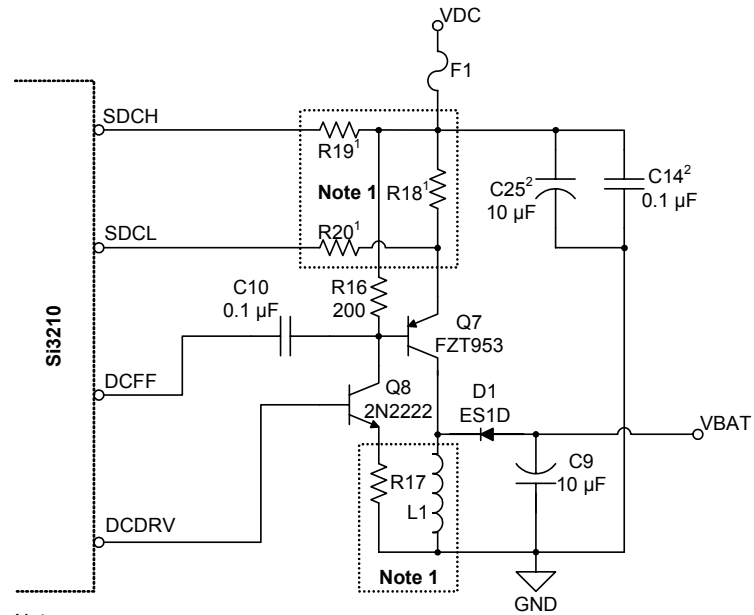

Notes:


1. Values and configurations for these components can be derived from "AN45: Design Guide for the Si3210 DC-DC Converter" or Table 21.
2. Voltage rating for C14 and C25 must be greater than VDC.

Figure 10. Si3210 BJT/Inductor DC-DC Converter Circuit

Si3210/Si3211

Table 13. Si3210 BJT/Inductor DC-DC Converter Component Values

| Component(s) | Value | Package | Supplier |
|--|--|----------|--|
| C9 | 10 μ F, 100 V, Electrolytic, \pm 20% | Radial | Panasonic |
| C10 | 0.1 μ F, 50 V, X7R, \pm 20% | 1210 | Murata, Johanson, Novacap, Venkel |
| C14* | 0.1 μ F, X7R, \pm 20% | 1210 | Murata, Johanson, Novacap, Venkel |
| C25* | 10 μ F, Electrolytic, \pm 20% | Radial | Panasonic |
| R16 | 200 Ω , 1/10 W, \pm 5% | 805 | |
| R17 | 1/10 W, \pm 5% (See AN45 or Table 21 for value selection) | 805 | |
| R18 | 1/4 W, \pm 5% (See AN45 or Table 21 for value selection) | 1206 | |
| R19,R20 | 1/10 W, \pm 1% (See AN45 or Table 21 for value selection) | 805 | |
| F1 | Fuse | SMD | Belfuse SSQ Series |
| D1 | Ultra Fast Recovery 200 V, 1A Rectifier | DO214-AA | General Semi ES1D; Central Semi CMR1U-02 |
| L1 | 1 A, Shielded Inductor (See AN45 or Table 21 for value selection) | SMD | API Delevan SPD127 series, Sumida CDRH127 series, Datatronics DR340-1 series, Coilcraft DS5022, TDK SLF12565 |
| Q7 | 120 V, High Current Switching PNP | SOT-223 | Zetex FZT953, FZT955, ZTX953, ZTX955; Sanyo 2SA1552 |
| Q8 | 60 V, General Purpose Switching NPN | SOT-23 | ON Semi MMBT2222ALT1, MPS2222A; Central Semi CMPT2222A; Zetex FMPT2222 |
| <p>*Note: Voltage rating of this device must be greater than V_{DC}.</p> | | | |

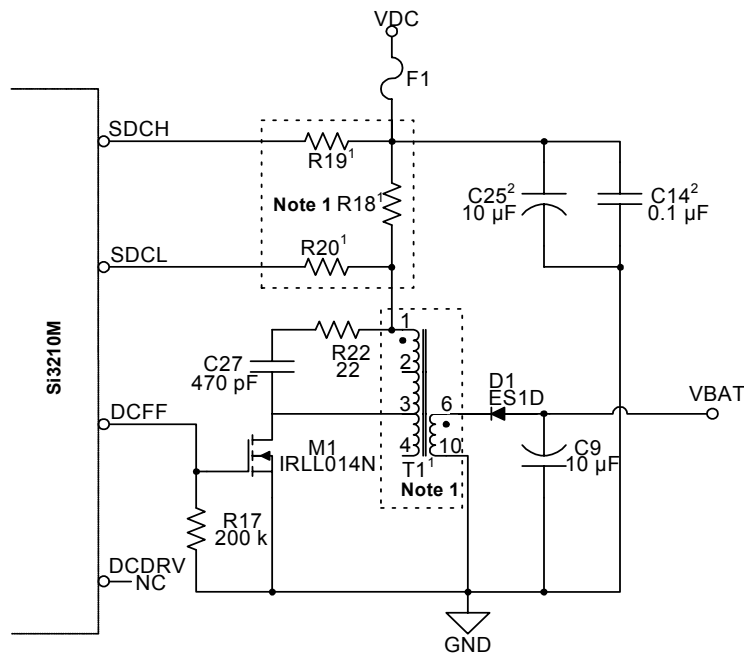

Notes:

1. Values and configurations for these components can be derived from AN45 or Table 20.

2. Voltage rating for C14 and C25 must be greater than V_{DC}.

Figure 11. Si3210M MOSFET/Transformer DC-DC Converter Circuit

Table 14. Si3210M MOSFET/Transformer DC-DC Converter Component Values

| Component(s) | Value | Package | Supplier |
|--------------|---|---------|--|
| C9 | 10 μ F, 100 V, Electrolytic, \pm 20% | Radial | Panasonic |
| C14* | 0.1 μ F, X7R, \pm 20% | 1210 | Murata, Johanson, Novacap, Venkel |
| C25* | 10 μ F, Electrolytic, \pm 20% | Radial | Panasonic |
| C27 | 470 pF, 100 V, X7R, \pm 20% | 1206 | Murata, Johanson, Novacap, Venkel |
| R17 | 200 k Ω , 1/10 W, \pm 5% | 805 | |
| R18 | 1/4 W, \pm 5% (See "AN45: Design Guide for the Si3210 DC-DC Converter" or Table 20 for value selection) | 1206 | |
| R19,R20 | 1/10 W, \pm 1% (See AN45 or Table 20 for value selection) | 805 | |
| R22 | 22 Ω , 1/10 W, \pm 5% | 805 | |
| F1 | Fuse | SMD | Belfuse SSQ Series |
| D1 | Ultra Fast Recovery 200 V, 1 A Rectifier | D214-AA | General Semi ES1D; Central Semi CMR1U-02 |
| T1 | Power Transformer | SMD | Coiltronic CTX01-15275; Datatronics SM76315; Midcom 31353R-02 |
| M1 | 100 V, Logic Level Input MOSFET | SOT-223 | Intl Rect. IRLL014N; Intersil HUF76609D3S; ST Micro STD5NE10L, STN2NE10L |

*Note: Voltage rating of this device must be greater than V_{DC}.

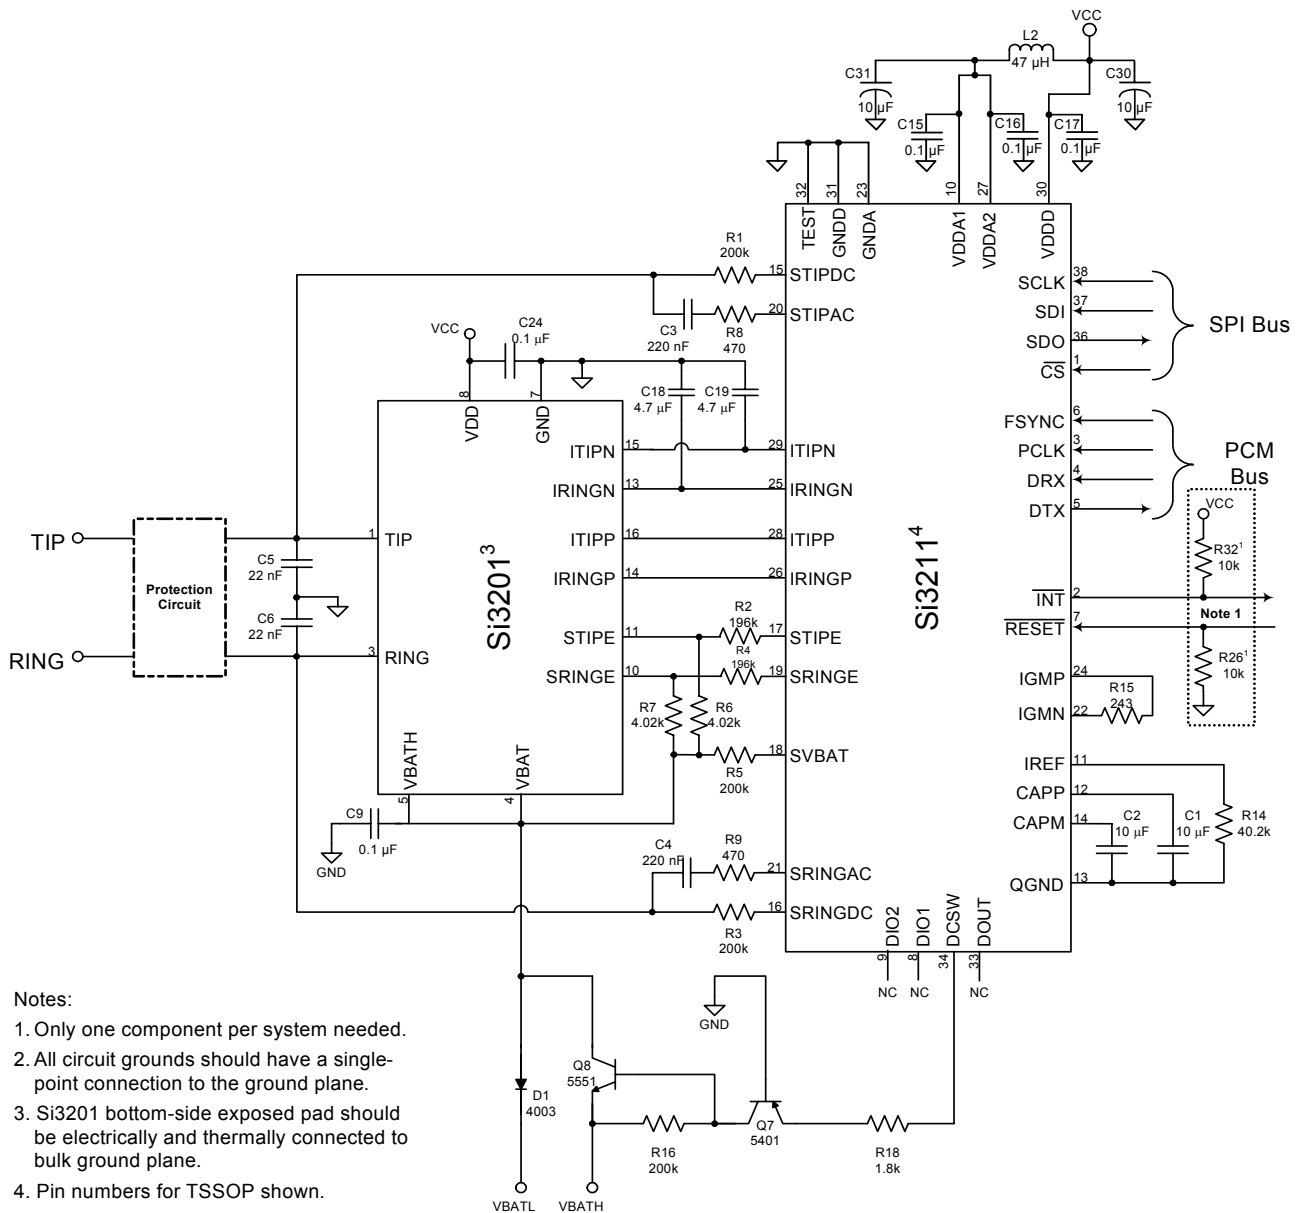



Figure 12. Si3211 Typical Application Circuit Using Si3201

Table 15. Si3211 + Si3201 External Component Values

| Component(s) | Value | Package | Supplier |
|---|--|---------|-----------------------------------|
| C1,C2 | 10 μ F, 6 V Ceramic or 16 V, Low-Leakage Electrolytic, \pm 20% | Radial | Murata, Nichicon URL1C100MD |
| C3,C4 | 220 nF, 100 V, X7R, \pm 20% | 1812 | Murata, Johanson, Novacap, Venkel |
| C5,C6 | 22 nF, 100 V, X7R, \pm 20% | 1206 | Murata, Johanson, Novacap, Venkel |
| C9 | 0.1 μ F, 100 V, X7R, \pm 20% | 1210 | Murata, Johanson, Novacap, Venkel |
| C15,C16,C17,C24 | 0.1 μ F, 6 V, Y5V, \pm 20% | 1206 | Murata, Johanson, Novacap, Venkel |
| C18,C19 | 4.7 μ F Ceramic, 6 V, X7R, \pm 20% | 1206 | Murata, Johanson, Novacap, Venkel |
| C30,C31 | 10 μ F, 10 V, Electrolytic, \pm 20% | Radial | Panasonic |
| L2 | 47 μ H, 150 mA | SMD | Coilcraft |
| D1 | 200 V, 1 A Rectifier | MELF | ON Semi: MRA4003, IN4003 |
| Q7 | 120 V, PNP, BJT | SOT-89 | ON Semi: 2N5401 |
| Q8 | 120 V, NPN, BJT | SOT-223 | ON Semi: 2N5551 |
| R1 ¹ ,R3 ¹ ,R5 ¹ ,R16 ¹ | 200 k Ω , 1/10 W, \pm 1% | 805 | |
| R2 ¹ ,R4 ¹ | 196 k Ω , 1/10 W, \pm 1% | 805 | |
| R6,R7 | 4.02 k Ω , 1/10 W, \pm 1% | 805 | |
| R8,R9 | 470 Ω , 1/10 W, \pm 1% | 805 | |
| R14 | 40.2 k Ω , 1/10 W, \pm 1% | 805 | |
| R15 | 243 Ω , 1/10 W, \pm 1% | 805 | |
| R18 | 1.8 k Ω , 1/10 W, \pm 5% | 805 | |
| R26 ² | 10 k Ω , 1/10 W, \pm 1% | 805 | |
| R32 ² | 10 k Ω , 1/10 W, \pm 5% | 805 | |

Notes:

1. These resistors must be in an 0805 or larger package.
2. Only one component per system needed.

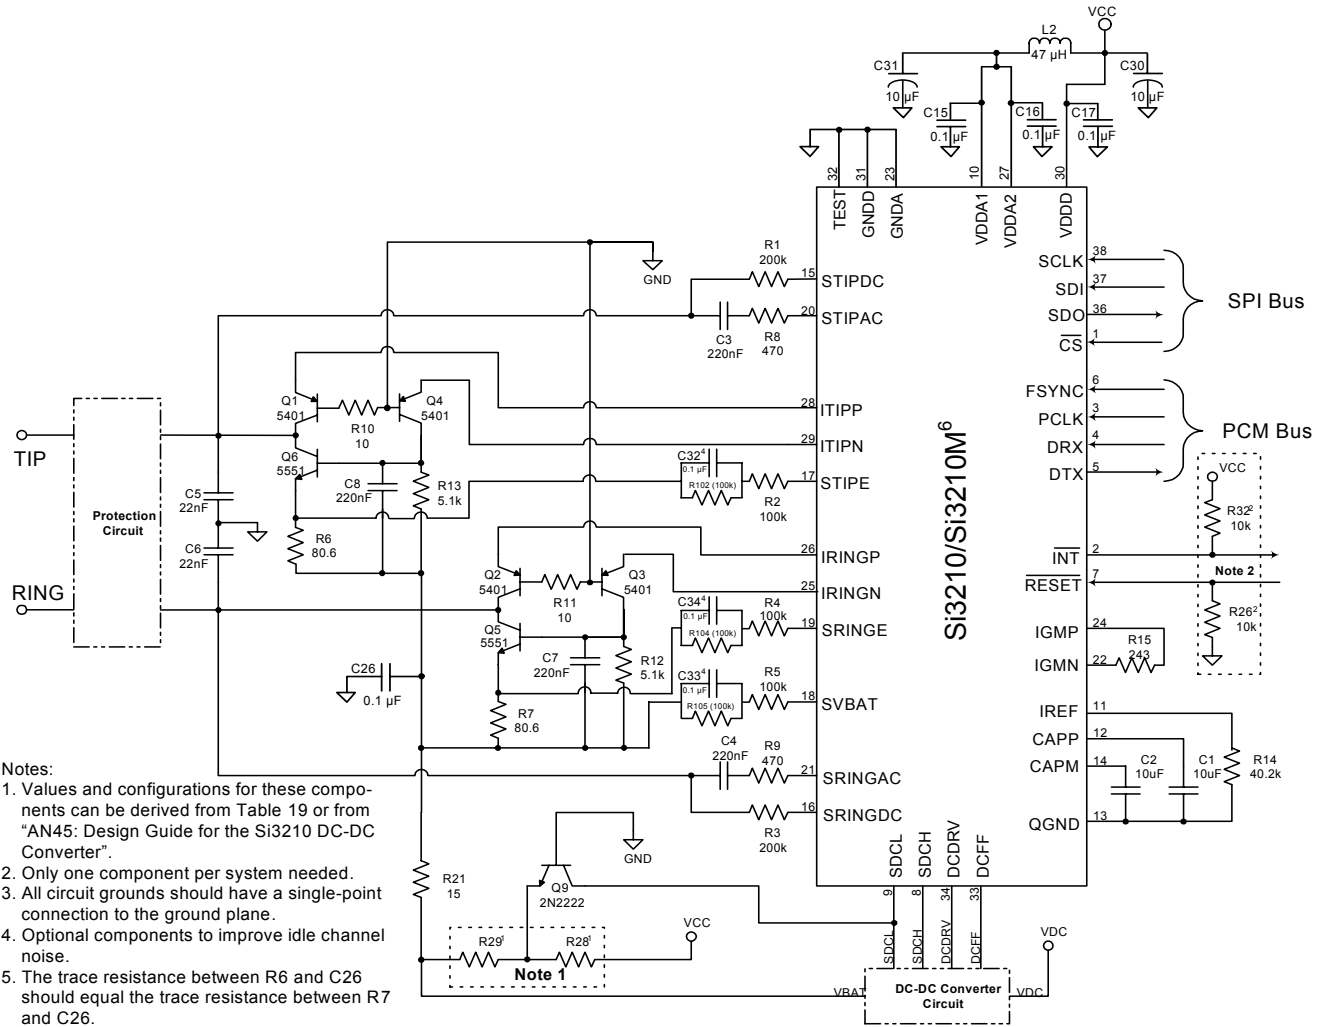

- Notes:
1. Values and configurations for these components can be derived from Table 19 or from "AN45: Design Guide for the Si3210 DC-DC Converter".
 2. Only one component per system needed.
 3. All circuit grounds should have a single-point connection to the ground plane.
 4. Optional components to improve idle channel noise.
 5. The trace resistance between R6 and C26 should equal the trace resistance between R7 and C26.
 6. Pin numbers for TSSOP shown.

Figure 13. Si3210/Si3210M Typical Application Circuit Using Discrete Components

Table 16. Si3210/Si3210M External Component Values—Discrete Solution

| Component(s) | Value | Package | Supplier/Part Number |
|---|--|---------|--|
| C1,C2 | 10 μ F, 6 V Ceramic or 16 V Low-Leakage Electrolytic, \pm 20% | Radial | Murata, Panasonic, Nichicon URL1C100MD |
| C3,C4 | 220 nF, 100 V, X7R, \pm 20% | 1812 | Murata, Johanson, Novacap, Venkel |
| C5,C6 | 22 nF, 100 V, X7R, \pm 20% | 1206 | Murata, Johanson, Novacap, Venkel |
| C7,C8 | 220 nF, 50 V, X7R, \pm 20% | 1812 | Murata, Johanson, Novacap, Venkel |
| C15,C16,C17 | 0.1 μ F, 6 V, Y5V, \pm 20% | 603 | Murata, Johanson, Novacap, Venkel |
| C26 | 0.1 μ F, 100 V, X7R, \pm 20% | 1210 | Murata, Johanson, Novacap, Venkel |
| C30,C31 | 10 μ F, 10 V, Electrolytic, \pm 20% | Radial | Panasonic |
| C32,C33,C34 | 0.1 μ F, 50 V, \pm 20% | 805 | Venkel |
| L2 | 47 μ H, 150 mA | SMD | Coilcraft |
| Q1,Q2,Q3,Q4 | 120 V, PNP, BJT | SOT-23 | Central Semi CMPT5401; ON Semi MMBT5401LT1, 2N5401; Zetex FMMT5401; Fairchild 2N5401; Samsung 2N5401 |
| Q5,Q6 | 120 V, NPN, BJT | SOT-223 | Central Semi CZT5551, ON Semi 2N5551; Fairchild 2N5551; Phillips 2N5551 |
| Q9 | NPN General Purpose BJT | SOT-23 | ON Semi MMBT2222ALT1, MPS2222A; Central Semi CMPT2222A; Zetex FMMT2222 |
| R1 ¹ , R3 ¹ | 200 k Ω , 1/10 W, \pm 1% | 805 | |
| R2 ¹ , R4 ¹ , R5 ¹ , R102 ¹ , R104 ¹ , R105 ¹ | 100 k Ω , 1/10 W, \pm 1% | 805 | |
| R6,R7 | 80.6 Ω , 1/4 W, \pm 1% | 1210 | |
| R8,R9 | 470 Ω , 1/10 W, \pm 1% | 805 | |
| R10,R11 | 10 Ω , 1/10 W, \pm 5% | 805 | |
| R12,R13 | 5.1 k Ω , 1/10 W, \pm 5% | 805 | |
| R14 | 40.2 k Ω , 1/10 W, \pm 1% | 805 | |
| R15 | 243 Ω , 1/10 W, \pm 1% | 805 | |
| R21 | 15 Ω , 1/4 W, \pm 1% | 805 | |
| R26 ² | 10 k Ω , 1/10 W, \pm 1% | 805 | |
| R28,R29 | 1/10 W, \pm 1% (See "AN45: Design Guide for the Si3210/15/16 DC-DC Converter" or Table 19 for value selection) | 805 | |
| R32 ² | 10 k Ω , 1/10 W, \pm 5% | 805 | |

Notes:

1. These resistors must be in 0805 or larger package.
2. Only one component per system needed.

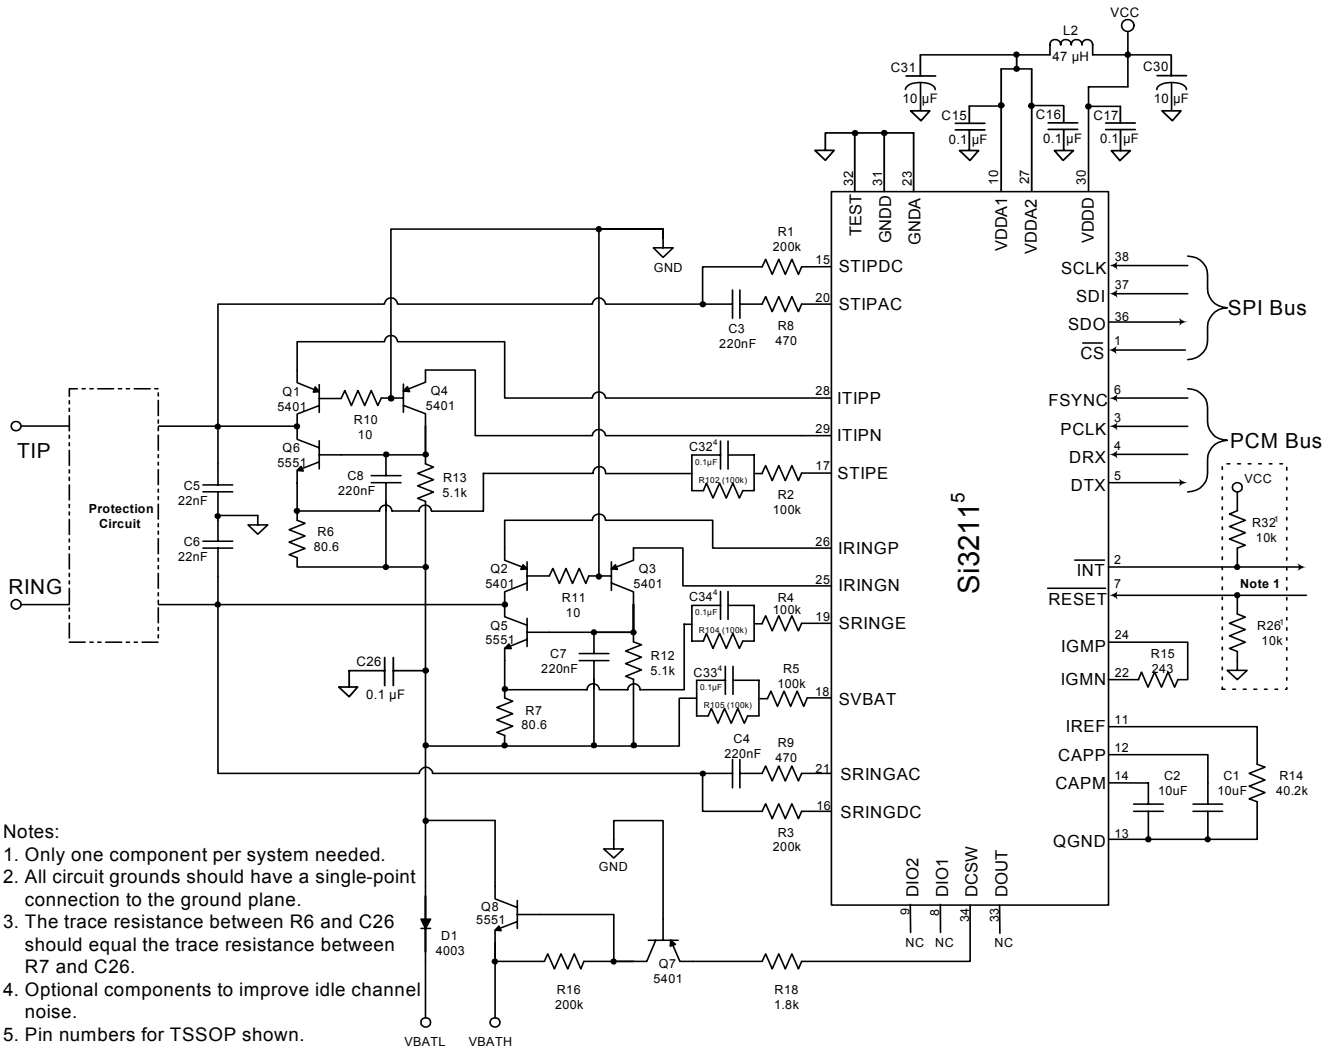


Figure 14. Si3211 Typical Application Circuit Using Discrete Solution

Table 17. Si3211 External Component Values—Discrete Solution

| Component(s) | Value | Package | Supplier/Part Number |
|---|---|---------|--|
| C1,C2 | 10 μ F, 6 V Ceramic or 16 V Low Leakage Electrolytic, \pm 20% | Radial | Murata, Panasonic, Nichicon URL1C100MD |
| C3,C4 | 220 nF, 100 V, X7R, \pm 20% | 1812 | Murata, Johanson, Novacap, Venkel |
| C5,C6 | 22 nF, 100 V, X7R, \pm 20% | 1206 | Murata, Johanson, Novacap, Venkel |
| C7,C8 | 220 nF, 50 V, X7R, \pm 20% | 1812 | Murata, Johanson, Novacap, Venkel |
| C9 | 0.1 μ F, 100 V, X7R, \pm 20% | 1210 | Panasonic |
| C15,C16,C17 | 0.1 μ F, 6 V, Y5V, \pm 20% | 603 | Murata, Johanson, Novacap, Venkel |
| C30,C31 | 10 μ F, 10 V, X7R, \pm 20% | Radial | Panasonic |
| C32, C33, C34 | 0.1 μ F, 50 V, X7R, \pm 20% | 805 | Venkel |
| L2 | 47 μ H, 150 mA | SMD | Coilcraft |
| R1 ¹ ,R3 ¹ ,R16 ¹ | 200 k Ω , 1/10 W, \pm 1% | 805 | |
| R2 ¹ , R4 ¹ , R5 ¹ , R102 ¹ , R104 ¹ , R105 ¹ | 100 k Ω , 1/10 W, \pm 1% | 805 | |
| R6,R7 | 80.6 Ω , 1/4 W, \pm 1% | 1210 | |
| R8,R9 | 470 Ω , 1/10 W, \pm 1% | 805 | |
| R10,R11 | 10 Ω , 1/10 W, \pm 5% | 805 | |
| R12,R13 | 5.1 k Ω , 1/10 W, \pm 5% | 805 | |
| R14 | 40.2 k Ω , 1/10 W, \pm 1% | 805 | |
| R15 | 243 Ω , 1/10 W, \pm 1% | 805 | |
| R18 | 1.8 k Ω , 1/10 W, \pm 5% | 805 | |
| R26 ² | 10 k Ω , 1/10 W, \pm 1% | 805 | |
| R32 ² | 10 k Ω , 1/10 W, \pm 5% | 805 | |
| D1 | 200 V 1A Rectifier | MELF | ON Semi MRA4003, 1N4003 |
| Q1,Q2,Q3,Q4,Q7 | 120 V, PNP, BJT | SOT-23 | Central Semi CMPT5401; ON Semi MMBT5401LT1, 2N5401; Zetex FMMT5401 |
| Q5,Q6 | 120 V, NPN, BJT | SOT-223 | Central Semi CZT5551, ON Semi 2N5551 |
| Q8 | 120 V, NPN, BJT | SOT-223 | Central Semi CMPT5551, ON Semi 2N5551 |

Notes:

1. These resistors must be in an 0805 or larger package.
2. Only one component per system needed.

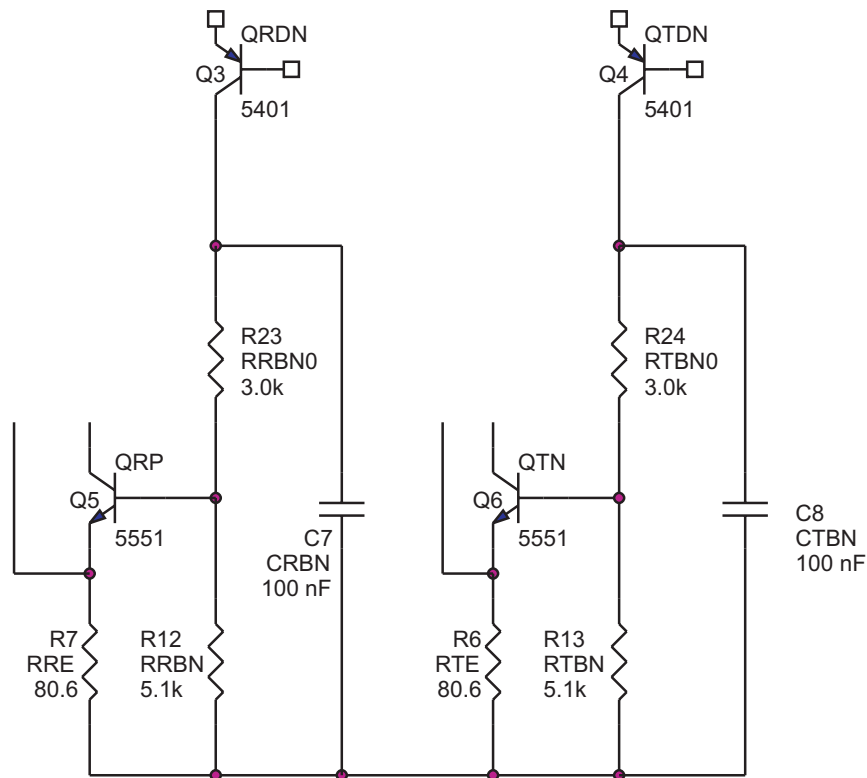


Figure 15. Si321x Optional Equivalent Q5, Q6 Bias Circuit

Table 18. Si321x Optional Bias Component Values

| Component | Value | Package | Supplier/Part Number |
|-----------|--------------------------|---------|--------------------------|
| C7,C8 | 100 nF, 100 V, X7R, ±20% | 1210 | Murata, Johanson, Venkel |
| R23,R24 | 3.0 kΩ, 1/10 W, ±5% | 805 | |

The subcircuit above can be substituted into any of the ProSLIC solutions as an optional bias circuit for Q5 and Q6. For this optional subcircuit, C7 and C8 differ in voltage and capacitance from the standard circuit. R23 and R24 are additional components.

Table 19. Component Value Selection for Si3210/Si3210M

| Component | Value | Package | Comments |
|-----------|--|---------|---|
| R28 | 1/10 W, 1% resistor For $V_{DD} = 3.3\text{ V}$: 26.1 kΩ For $V_{DD} = 5.0\text{ V}$: 37.4 kΩ | 805 | $R28 = (V_{DD} + V_{BE})/148\ \mu\text{A}$ where V_{BE} is the nominal V_{BE} for Q9 |
| R29 | 1/10 W, 1% resistor For $V_{CLAMP} = 80\text{ V}$: 541 kΩ For $V_{CLAMP} = 85\text{ V}$: 574 kΩ For $V_{CLAMP} = 100\text{ V}$: 676 kΩ | 805 | $R29 = V_{CLAMP}/148\ \mu\text{A}$ where V_{CLAMP} is the clamping voltage for V_{BAT} |

Table 20. Component Value Selection Examples for Si3210M MOSFET/Transformer DC-DC Converter

| VDC | Maximum Ringing Load/Loop Resistance | Transformer Ratio | R18 | R19, R20 |
|-------|--------------------------------------|-------------------|---------------|-----------------|
| 3.3 V | 3 REN/117 Ω | 1–2 | 0.06 Ω | 7.15 k Ω |
| 5.0 V | 5 REN/117 Ω | 1–2 | 0.10 Ω | 16.5 k Ω |
| 12 V | 5 REN/117 Ω | 1–3 | 0.6 Ω | 56.2 k Ω |
| 24 V | 5 REN/117 Ω | 1–4 | 2.1 Ω | 121 k Ω |

Note: There are other system and software conditions that influence component value selection. Refer to “AN45: Design Guide for the Si3210 DC-DC Converter” for detailed guidance.

Table 21. Component Value Selection Examples for Si3210 BJT/Inductor DC-DC Converter

| VDC | Maximum Ringing Load/Loop Resistance | L1 | R17 | R18 | R19, R20 |
|------|--------------------------------------|-------------|--------------|---------------|-----------------|
| 5 V | 3 REN/117 Ω | 67 μ H | 150 Ω | 0.15 Ω | 16.5 k Ω |
| 12 V | 5 REN/117 Ω | 150 μ H | 162 Ω | 0.56 Ω | 56.2 k Ω |
| 24 V | 5 REN/117 Ω | 220 μ H | 175 Ω | 2.0 Ω | 121 k Ω |

Note: There are other system and software conditions that influence component value selection. Refer to “AN45: Design Guide for the Si3210 DC-DC Converter” for detailed guidance.

2. Functional Description

The ProSLIC[®] is a single, low-voltage CMOS device that provides all the SLIC, codec, DTMF detection, and signal generation functions needed for a complete analog telephone interface. The ProSLIC performs all battery, overvoltage, ringing, supervision, codec, hybrid, and test (BORSCHT) functions. Unlike most monolithic SLICs, the Si3210 does not require externally-supplied high-voltage battery supplies. Instead, it generates all necessary battery voltages from a positive dc supply using its own dc-dc converter controller. Two fully-programmable tone generators can produce DTMF tones, phase continuous FSK (caller ID) signaling, and call progress tones. DTMF decoding and pulse metering signal generation are also integrated. The Si3201 linefeed interface IC performs all high-voltage functions. As an option, the Si3201 can also be replaced with low-cost discrete components as shown in the typical application circuits in Figures 12, 13, and 14.

The ProSLIC is ideal for short loop applications, such as terminal adapters, cable telephony, PBX/key systems, wireless local loop (WLL), and voice over IP solutions. The device meets all relevant LSSGR and CCITT standards.

The linefeed provides programmable on-hook voltage, programmable off-hook loop current, reverse battery operation, loop or ground start operation, and on-hook transmission ringing voltage. Loop current and voltage are continuously monitored using an integrated A/D converter. Balanced 5 REN ringing with or without a programmable dc offset is integrated. The available offset, frequency, waveshape, and cadence options are designed to ring the widest variety of terminal devices and to reduce external controller requirements.

A complete audio transmit and receive path is integrated, including DTMF decoding, ac impedance, and hybrid gain. These features are software-programmable, allowing for a single hardware design to meet international requirements. Digital voice data transfer occurs over a standard PCM bus. Control data is transferred using a standard SPI. The device is available in a 38-pin QFN or TSSOP package.

2.1. Linefeed Interface

The ProSLIC's linefeed interface offers a rich set of features and programmable flexibility to meet the broadest applications requirements. The dc linefeed characteristics are software-programmable. Key current, voltage, and power measurements are acquired in real time and provided in software registers.

2.1.1. DC Feed Characteristics

The ProSLIC has programmable constant voltage and constant current zones as shown in Figure 16. Open-circuit TIP-to-RING voltage (V_{OC}) defines the constant voltage zone and is programmable from 0 V to 94.5 V in 1.5 V steps. The loop current limit (I_{LIM}) defines the constant current zone and is programmable from 20 mA to 41 mA in 3 mA steps. The ProSLIC has an inherent dc output resistance (R_O) of 160 Ω .

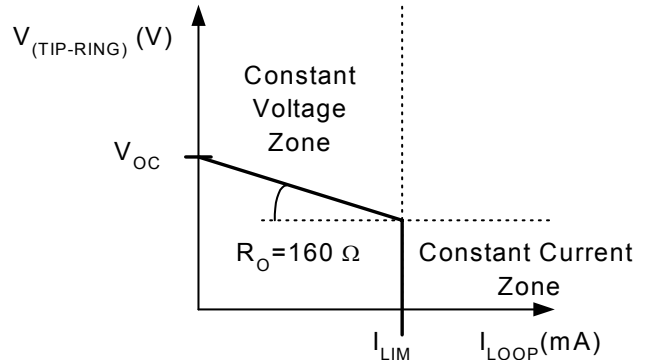


Figure 16. Simplified DC Current/Voltage Linefeed Characteristic

The TIP-to-RING voltage (V_{OC}) is offset from ground by a programmable voltage (V_{CM}) to provide voltage headroom to the positive-most terminal (TIP in forward polarity states and RING in reverse polarity states) for carrying audio signals. Table 22 summarizes the parameters to be initialized before entering an active state.

Table 22. Programmable Ranges of DC Linefeed Characteristics

| Parameter | Programmable Range | Default Value | Register Bits | Location* |
|-----------|--------------------|---------------|---------------|--------------------|
| I_{LIM} | 20 to 41 mA | 20 mA | ILIM[2:0] | Direct Register 71 |
| V_{OC} | 0 to 94.5 V | 48 V | VOC[5:0] | Direct Register 72 |
| V_{CM} | 0 to 94.5 V | 3 V | VCM[5:0] | Direct Register 73 |

*Note: The ProSLIC uses registers that are both directly and indirectly mapped. A "direct" register is one that is mapped directly.

2.1.2. Linefeed Architecture

The ProSLIC is a low-voltage CMOS device that uses either an Si3201 linefeed interface IC or low-cost external components to control the high voltages required for subscriber line interfaces. Figure 17 is a simplified illustration of the linefeed control loop circuit for TIP or RING and the external components used.

The ProSLIC uses both voltage and current sensing to control TIP and RING. DC and ac line voltages on TIP and RING are measured through sense resistors R_{DC} and R_{AC} . The ProSLIC uses linefeed transistors Q_P and Q_N to drive TIP and RING. Q_{DN} isolates the high-voltage base of Q_N from the ProSLIC.

The ProSLIC measures voltage at various nodes in order to monitor the linefeed current. R_{DC} , R_{SE} , and R_{BAT} provide access to these measuring points. The sense circuitry is calibrated on-chip to guarantee measurement accuracy with standard external component tolerances. See "2.1.9. Linefeed Calibration" on page 36 for details.

2.1.3. Linefeed Operation States

The ProSLIC linefeed has eight states of operation as shown in Table 23. The state of operation is controlled using the Linefeed Control register (direct Register 64).

The open state turns off all currents into the external bipolar transistors and can be used in the presence of fault conditions on the line and to generate Open Switch Intervals (OSIs). TIP and RING are effectively tri-stated with a dc output impedance of about 150 k Ω .

The ProSLIC can also automatically enter the open state if it detects excessive power being consumed in the external bipolar transistors.

See "2.1.5. Power Monitoring and Line Fault Detection" for more details.

In the forward active and reverse active states, linefeed circuitry is on, and the audio signal paths are powered down.

In the forward and reverse on-hook transmission states, audio signal paths are powered up to provide data transmission during an on-hook loop condition.

The TIP Open state turns off all control currents to the external bipolar devices connected to TIP and provides an active linefeed on RING for ground start operation.

The RING Open state provides similar operation with the RING drivers off and TIP active.

The ringing state drives programmable ringing waveforms onto the line.

2.1.4. Loop Voltage and Current Monitoring

The ProSLIC continuously monitors the TIP and RING voltages and external BJT currents. These values are available in registers 78–89. Table 24 on page 33 lists the values that are measured and their associated registers. An internal A/D converter samples the measured voltages and currents from the analog sense circuitry and translates them into the digital domain. The A/D updates the samples at a rate of 800 Hz. Two derived values are also reported: loop voltage and loop current. The loop voltage, $V_{TIP} - V_{RING}$, is reported as a 1-bit sign, 6-bit magnitude format. For ground start operation, the reported value is the RING voltage. The loop current, $(I_{Q1} - I_{Q2} + I_{Q5} - I_{Q6})/2$, is reported in a 1-bit sign, 6-bit magnitude format. In RING open and TIP open states, the loop current is reported as $(I_{Q1} - I_{Q2}) + (I_{Q5} - I_{Q6})$.

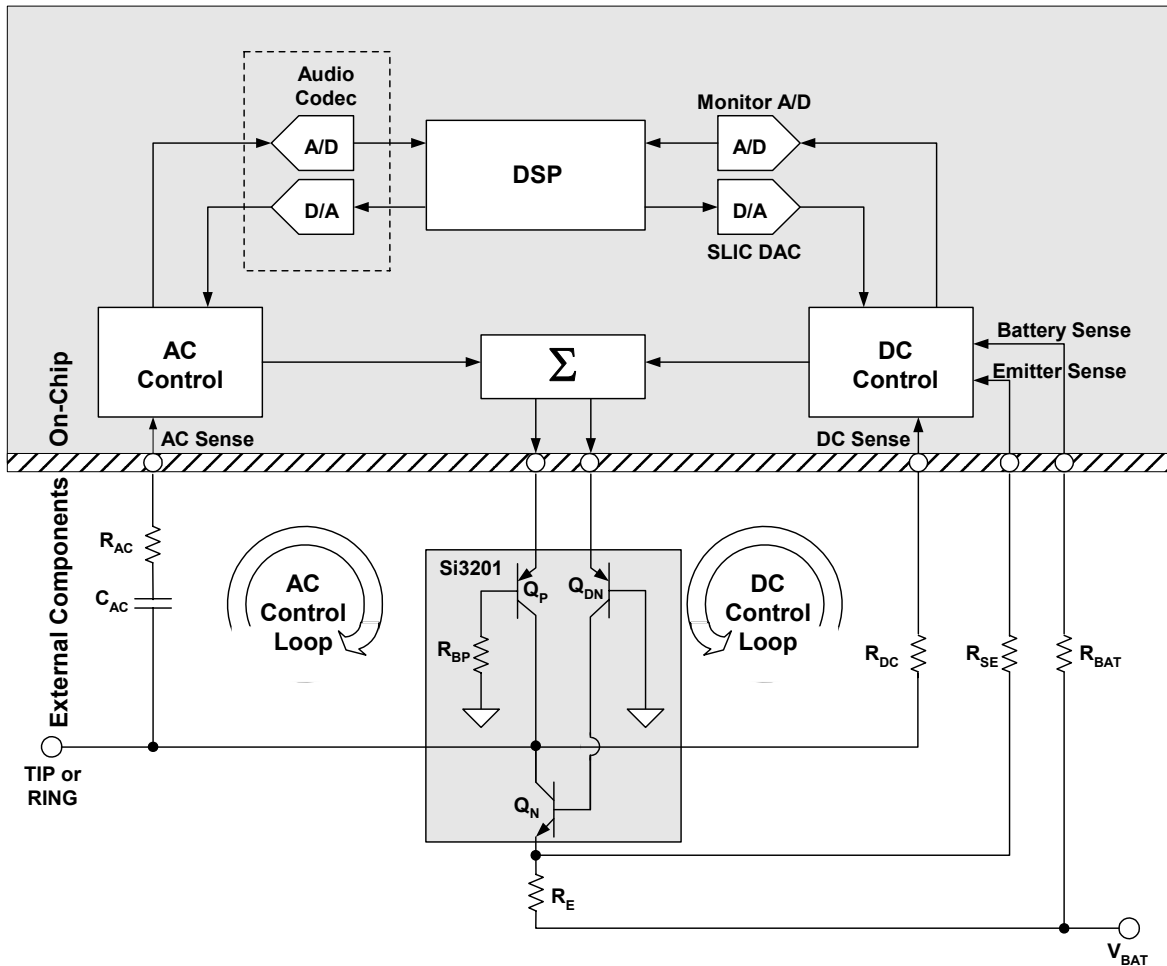


Figure 17. Simplified ProSLIC Linefeed Architecture for TIP and RING Leads (One Shown)

Table 23. ProSLIC Linefeed Operations

| LF[2:0]* | Linefeed State | Description |
|----------|------------------------------|--|
| 000 | Open | TIP and RING tri-stated |
| 001 | Forward Active | $V_{TIP} > V_{RING}$ |
| 010 | Forward On-Hook Transmission | $V_{TIP} > V_{RING}$; audio signal paths powered on |
| 011 | TIP Open | TIP tri-stated, RING active; used for ground start |
| 100 | Ringing | Ringing waveform applied to TIP and RING |
| 101 | Reverse Active | $V_{RING} > V_{TIP}$ |
| 110 | Reverse On-Hook Transmission | $V_{RING} > V_{TIP}$; audio signal paths powered on |
| 111 | Ring Open | RING tri-stated, TIP active |

Note: The linefeed register (LF) is located in direct Register 64.

Table 24. Measured Real-Time Linefeed Interface Characteristics

| Parameter | Measurement Range | Resolution | Register Bits | Location* |
|---|--------------------|--------------|-------------------|--------------------|
| Loop Voltage Sense ($V_{TIP} - V_{RING}$) | -94.5 to +94.5 V | 1.5 V | LVSP, LVS[6:0] | Direct Register 78 |
| Loop Current Sense | -78.75 to +78.5 mA | 1.25 mA | LCSP, LCS[5:0] | Direct Register 79 |
| TIP Voltage Sense | 0 to -95.88 V | 0.376 V | VTIP[7:0] | Direct Register 80 |
| RING Voltage Sense | 0 to -95.88 V | 0.376 V | VRING[7:0] | Direct Register 81 |
| Battery Voltage Sense 1 (V_{BAT}) | 0 to -95.88 V | 0.376 V | VBATS1[7:0] | Direct Register 82 |
| Battery Voltage Sense 2 (V_{BAT}) | 0 to -95.88 V | 0.376 V | VBATS2[7:0] | Direct Register 83 |
| Transistor 1 Current Sense | 0 to 81.35 mA | 0.319 mA | IQ1[7:0] | Direct Register 84 |
| Transistor 2 Current Sense | 0 to 81.35 mA | 0.319 mA | IQ2[7:0] | Direct Register 85 |
| Transistor 3 Current Sense | 0 to 9.59 mA | 37.6 μ A | IQ3[7:0] | Direct Register 86 |
| Transistor 4 Current Sense | 0 to 9.59 mA | 37.6 μ A | IQ4[7:0] | Direct Register 87 |
| Transistor 5 Current Sense | 0 to 80.58 mA | 0.316 mA | IQ5[7:0] | Direct Register 88 |
| Transistor 6 Current Sense | 0 to 80.58 mA | 0.316 mA | IQ6[7:0] | Direct Register 89 |

***Note:** The ProSLIC uses registers that are both directly and indirectly mapped. A "direct" register is one that is mapped directly.

2.1.5. Power Monitoring and Line Fault Detection

In addition to reporting voltages and currents, the ProSLIC continuously monitors the power dissipated in each external bipolar transistor. Real-time output power of any one of the six linefeed transistors can be read by setting the Power Monitor Pointer (direct Register 76) to point to the desired transistor and then reading the Line Power Output Monitor (direct Register 77).

The real-time power measurements are low-pass filtered and compared to a maximum power threshold. Maximum power thresholds and filter time constants are software-programmable and should be set for each transistor pair based on the characteristics of the transistors used. Table 25 describes the registers associated with this function. If the power in any external transistor exceeds the programmed threshold, a power alarm event is triggered. The ProSLIC sets the Power Alarm register bit, generates an interrupt (if enabled), and automatically enters the Open state (if AOPN = 1). This feature protects the external transistors from fault conditions and, combined with the loop voltage and current monitors, allows diagnosis of the type of fault condition present on the line.

The value of each thermal low-pass filter pole is set according to the equation:

$$\text{Thermal LPF register} = \frac{4096}{800 \times \tau} \times 2^3$$

where τ is the thermal time constant of the transistor package, 4096 is the full range of the 12-bit register, and 800 is the sample rate in hertz. Generally $\tau = 3$ seconds for SOT223 packages and $\tau = 0.16$ seconds for SOT23, but check with the manufacturer for the package thermal constant of a specific device. For example, the power alarm threshold and low-pass filter values for Q5 and Q6 using a SOT223 package transistor are computed as follows:

$$\text{PPT56} = \frac{P_{MAX}}{\text{Resolution}} \times 2^7 = \frac{1.28}{0.0304} \times 2^7 = 5389 = 150Dh$$

Thus, indirect Register 34 should be set to 150Dh.

Note: The power monitor resolution for Q3 and Q4 is different from that of Q1, Q2, Q5, and Q6.

Table 25. Associated Power Monitoring and Power Fault Registers

| Parameter | Description/ Range | Resolution | Register Bits | Location* |
|-------------------------------------|--|--------------------|-----------------------------|----------------------|
| Power Monitor Pointer | 0 to 5 points to Q1 to Q6, respectively | n/a | PWRMP[2:0] | Direct Register 76 |
| Line Power Monitor Output | 0 to 7.8 W for Q1, Q2, Q5, Q6 0 to 0.9 W for Q3, Q4 | 30.4 mW 3.62 mW | PWROM[7:0] | Direct Register 77 |
| Power Alarm Threshold, Q1 & Q2 | 0 to 7.8 W | 30.4 mW | PPT12[7:0] | Indirect Register 32 |
| Power Alarm Threshold, Q3 & Q4 | 0 to 0.9 W | 3.62 mW | PPT34[7:0] | Indirect Register 33 |
| Power Alarm Threshold, Q5 & Q6 | 0 to 7.8 W | 30.4 mW | PPT56[7:0] | Indirect Register 34 |
| Thermal LPF Pole, Q1 & Q2 | See equation above. | | NQ12[7:0] | Indirect Register 37 |
| Thermal LPF Pole, Q3 & Q4 | See equation above. | | NQ34[7:0] | Indirect Register 38 |
| Thermal LPF Pole, Q5 & Q6 | See equation above. | | NQ56[7:0] | Indirect Register 39 |
| Power Alarm Interrupt Pending | Bits 2 to 7 correspond to Q1 to Q6, respectively | n/a | QnAP[n+1], where n = 1 to 6 | Direct Register 19 |
| Power Alarm Interrupt Enable | Bits 2 to 7 correspond to Q1 to Q6, respectively | n/a | QnAE[n+1], where n = 1 to 6 | Direct Register 22 |
| Power Alarm Automatic/Manual Detect | 0 = manual mode 1 = enter open state upon power alarm | n/a | AOPN | Direct Register 67 |

***Note:** The ProSLIC uses registers that are both directly and indirectly mapped. A “direct” register is one that is mapped directly. An “indirect” register is one that is accessed using the indirect access registers (direct registers 28 through 31).

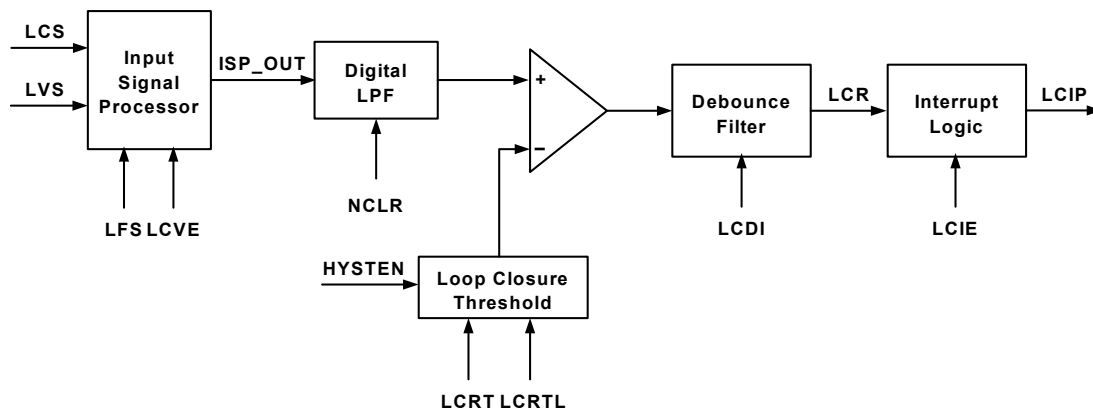


Figure 18. Loop Closure Detection

2.1.6. Loop Closure Transition Detection

A loop closure transition event signals that the terminal equipment has gone from on-hook to off-hook or from off-hook to on-hook; detection occurs while the ProSLIC linefeed is in its on-hook transmission or active states. The ProSLIC performs loop closure detection digitally using its on-chip monitor A/D converter. The functional blocks required to implement loop closure detection are shown in Figure 18. The primary input to the system is the Loop Current Sense value provided in the LCS register (direct Register 79). The LCS value is processed in the Input Signal Processor when the ProSLIC is in the on-hook transmission or active linefeed state, as indicated by the Linefeed Shadow register, LFS[2:0] (direct Register 64). The data then feeds into a programmable digital low-pass filter, which removes unwanted ac signal components before threshold detection.

The output of the low-pass filter is compared to a programmable threshold, LCRT (indirect Register 28). The threshold comparator output feeds a programmable debouncing filter. The output of the debouncing filter remains in its present state unless the input remains in the opposite state for the entire period of time programmed by the loop closure debounce interval, LCDI (direct Register 69). If the debounce interval has been satisfied, the LCR bit will change state to indicate that a valid loop closure transition has occurred. A loop closure transition interrupt is generated if enabled by the LCIE bit (direct Register 22). Table 26 lists the registers that must be written or monitored to correctly detect a loop closure condition.

2.1.7. Loop Closure Threshold Hysteresis

Silicon revisions C and higher support the addition of programmable hysteresis to the loop closure threshold, which can be enabled by setting HYSTEN = 1 (direct Register 108, bit 0). The hysteresis is defined by LCRT

(indirect Register 28) and LCRTL (indirect Register 43), which set the upper and lower bounds, respectively.

2.1.8. Voltage-Based Loop Closure Detection

Silicon revisions C and higher also support an optional voltage-based loop closure detection mode, which is enabled by setting LCVE = 1 (direct Register 108, bit 2). In this mode, the loop voltage is compared to the loop closure threshold register (LCRT), which represents a minimum voltage threshold instead of a maximum current threshold. If hysteresis is also enabled, LCRT represents the upper voltage boundary, and LCRTL represents the lower voltage boundary for hysteresis. Although voltage-based loop closure detection is an option, the default current-based loop closure detection is recommended.

Table 26. Register Set for Loop Closure Detection

| Parameter | Register | Location |
|---|------------|------------------|
| Loop Closure Interrupt Pending | LCIP | Direct Reg. 19 |
| Loop Closure Interrupt Enable | LCIE | Direct Reg. 22 |
| Loop Closure Threshold | LCRT[5:0] | Indirect Reg. 28 |
| Loop Closure Threshold—Lower | LCRTL[5:0] | Indirect Reg. 43 |
| Loop Closure Filter Coefficient | NCLR[12:0] | Indirect Reg. 35 |
| Loop Closure Detect Status (monitor only) | LCR | Direct Reg. 68 |
| Loop Closure Detect Debounce Interval | LCDI[6:0] | Direct Reg. 69 |
| Hysteresis Enable | HYSTEN | Direct Reg. 108 |
| Voltage-Based Loop Closure | LCVE | Direct Reg. 108 |

2.1.9. Linefeed Calibration

An internal calibration algorithm corrects for internal and external component errors. The calibration is initiated by setting the CAL bit in direct Register 96. Upon completion of the calibration cycle, this bit is automatically reset.

It is recommended that a calibration be executed following system powerup. Upon release of the chip reset, the Si3210 will be in the open state. The calibration can be initiated after powering up the dc-dc converter and allowing it to settle for time (t_{settle}). Additional calibrations may be performed, but only one calibration should be necessary as long as the system remains powered up.

During calibration, V_{BAT} , V_{TIP} , and V_{RING} voltages are controlled by the calibration engine to provide the correct external voltage conditions for the algorithm. Calibration should be performed in the on-hook state. RING or TIP must not be connected to ground during the calibration.

When using the Si3201, automatic calibration routines for RING gain mismatch and TIP gain mismatch should not be performed. Instead of running these two calibrations automatically, follow the instructions for manual calibration in “AN35: Si321x User’s Quick Reference Guide”.

2.2. Battery Voltage Generation and Switching

The ProSLIC supports two modes of battery supply operation. First, the Si3210 integrates a dc-dc converter controller that dynamically regulates a single output voltage. This mode eliminates the need to supply large external battery voltages. Instead, it converts a single positive input voltage into the real-time battery voltage needed for any given state according to programmed linefeed parameters. Second, the Si3211 supports switching between high and low battery voltage supplies, as would a traditional monolithic SLIC.

For single to low channel count applications, the Si3210 proves to be an economical choice, as the dc-dc converter eliminates the need to design and build high-voltage power supplies. For higher channel count applications where centralized battery voltage supply is economical or for modular legacy systems where battery voltage is already available, the Si3211 is recommended.

2.2.1. DC-DC Converter General Description (Si3210/Si3210M Only)

The dc-dc converter dynamically generates the large negative voltages required to operate the linefeed interface. The Si3210 acts as the controller for a buck-

boost dc-dc converter that converts a positive dc voltage into the desired negative battery voltage. In addition to eliminating external power supplies, this allows the Si3210 to dynamically control the battery voltage to the minimum required for any given mode of operation.

Two different dc-dc circuit options are offered: a BJT/inductor version and a MOSFET/transformer version.

Due to the differences on the driving circuits, there are two different versions of the Si3210. The Si3210 supports the BJT/inductor circuit option, and the Si3210M version supports the MOSFET solution. The only difference between the two versions is the polarity of the DCFF pin with respect to the DCDRV pin. For the Si3210, DCDRV and DCFF are of opposite polarity. For the Si3210M, DCDRV and DCFF are the same polarity. Table 27 summarizes these differences.

Table 27. Si3210 and Si3210M Differences

| Device | DCFF Signal Polarity | DCPOL |
|---------|-----------------------------|-------|
| Si3210 | = $\overline{\text{DCDRV}}$ | 0 |
| Si3210M | = DCDRV | 1 |

Notes:

- DCFF signal polarity with respect to DCDRV signal.
- Direct Register 93, bit 5; This is a read-only bit.

Extensive design guidance on each of these circuits can be obtained from “AN45: Design Guide for the Si3210 DC-DC Converter” and from an interactive dc-dc converter design spreadsheet. Both of these documents are available on the Silicon Laboratories website (www.silabs.com).

2.2.2. BJT/Inductor Circuit Option Using Si3210

The BJT/Inductor circuit option shown in Figure 10 on page 19 offers a flexible, low-cost solution. Depending on selected L1 inductance value and the switching frequency, the input voltage (V_{DC}) can range from 5 V to 30 V. Because of the nature of a dc-dc converter’s operation, peak and average input currents can become large with small input voltages. Consider this when selecting the appropriate input voltage and power rating for the V_{DC} power supply.

For this solution, a PNP power BJT (Q7) switches the current flow through low ESR inductor L1. The Si3210 uses the DCDRV and DCFF pins to switch Q7 on and off. DCDRV controls Q7 through NPN BJT Q8. DCFF is ac-coupled to Q7 through capacitor C10 to assist R16 in turning off Q7. Therefore, DCFF must have opposite polarity to DCDRV, and the Si3210 (not Si3210M) must be used.

2.2.3. MOSFET/Transformer Circuit Option Using the Si3210M

The MOSFET/transformer circuit option (shown in Figure 11 on page 21) offers higher power efficiencies across a larger input voltage range. Depending on the transformer's primary inductor value and the switching frequency, the input voltage (V_{DC}) can range from 3.3 V to 35 V. Therefore, it is possible to power the entire ProSLIC solution from a single 3.3 V or 5 V power supply. By nature of a dc-dc converter's operation, peak and average input currents can become large with small input voltages. Consider this when selecting the appropriate input voltage and power rating for the V_{DC} power supply (number of REN supported).

For this solution, an N-channel power MOSFET (M1) switches the current flow through a power transformer, T1. T1 is specified in "AN45: Design Guide for the Si3210 DC-DC Converter" and includes several taps on the primary side to facilitate a wide range of input voltages. The Si3210M version of the Si3210 must be used for the application circuit depicted in Figure 11 because the DCFF pin is used to drive M1 directly and, therefore, must be the same polarity as DCDRV. DCDRV is not used in this circuit option; connecting DCFF and DCDRV together is not recommended.

2.2.4. DC-DC Converter Architecture (Si3210/Si3210M Only)

The control logic for a pulse-width-modulated (PWM) dc-dc converter is incorporated in the Si3210. Output pins DCDRV and DCFF are used to switch a bipolar transistor or MOSFET. The polarity of DCFF is opposite that of DCDRV.

The dc-dc converter circuit is powered on when the DCOF bit in the Powerdown Register (direct Register 14, bit 4) is cleared to 0. The switching regulator circuit within the Si3210 is a high-performance, pulse-width modulation controller. The control pins are driven by the PWM controller logic in the Si3210. The regulated output voltage (V_{BAT}) is sensed by the SVBAT pin and is used to detect whether the output voltage is above or below an internal reference for the desired battery voltage. The dc monitor pins, SDCH and SDCL, monitor input current and voltage to the dc-dc converter external circuitry. If an overload condition is detected, the PWM controller will turn off the switching transistor for the remainder of a PWM period to prevent damage to external components. It is important that the proper value of R18 be selected to ensure safe operation. Guidance is given in AN45.

The PWM controller operates at a frequency set by the dc-dc Converter PWM register (direct Register 92). During a PWM period, the outputs of the control pins, DCDRV and DCFF, are asserted for a time given by the read-only PWM Pulse Width register (direct Register 94).

The dc-dc converter must be off for some time in each cycle to allow the inductor or transformer to transfer its stored energy to the output capacitor, C9. This minimum off time can be set through the dc-dc Converter Switching Delay register, (direct Register 93). The number of 16.384 MHz clock cycles that the controller is off is equal to DCTOF (bits 0 through 4) plus 4. If the dc Monitor pins detect an overload condition, the dc-dc converter interrupts its conversion cycles regardless of the register settings to prevent component damage. These inputs should be calibrated by writing the DCCAL bit (bit 7) of the dc-dc Converter Switching Delay register, direct Register 93, after the dc-dc converter has been turned on.

Because the Si3210 dynamically regulates its own battery supply voltage using the dc-dc converter controller, the battery voltage, V_{BAT} , is offset from the negative-most terminal by a programmable voltage, V_{OV} , to allow voltage headroom for carrying audio signals.

As mentioned previously, the Si3210 dynamically adjusts V_{BAT} to suit the particular circuit requirement. To illustrate this, the behavior of V_{BAT} in the active state is shown in Figure 19. In the active state, the TIP-to-RING open circuit voltage is kept at V_{OC} in the constant voltage region while the regulator output voltage $V_{BAT} = V_{CM} + V_{OC} + V_{OV}$.

When the loop current attempts to exceed I_{LIM} , the dc line driver circuit enters constant current mode allowing the TIP to RING voltage to track R_{LOOP} . As the TIP terminal is kept at a constant voltage, it is the RING terminal voltage that tracks R_{LOOP} and, as a result, the $|V_{BAT}|$ voltage will also track R_{LOOP} . In this state, $|V_{BAT}| = I_{LIM} \times R_{LOOP} + V_{CM} + V_{OV}$. As R_{LOOP} decreases below the V_{OC}/I_{LIM} mark, the regulator output voltage can continue to track R_{LOOP} (TRACK = 1), or the R_{LOOP} tracking mechanism is stopped when $|V_{BAT}| = |V_{BATL}|$ (TRACK = 0). The former case is the more common application and provides the maximum power dissipation savings. In principle, the regulator output voltage can go as low as $|V_{BAT}| = V_{CM} + V_{OV}$, offering significant power savings.

When TRACK = 0, $|V_{BAT}|$ will not decrease below V_{BATL} . The RING terminal voltage, however, continues to decrease with decreasing R_{LOOP} .

Si3210/Si3211

The power dissipation on the NPN bipolar transistor driving the RING terminal can become large and may require a higher power rating device. The non-tracking mode of operation is required by specific terminal equipment that, in order to initiate certain data transmission modes, goes briefly on-hook to measure the line voltage to determine whether there is any other off-hook terminal equipment on the same line.

TRACK = 0 mode is desired since the regulator output voltage has long settling time constants (on the order of tens of milliseconds) and cannot change rapidly for TRACK = 1 mode. Therefore, the brief on-hook voltage measurement would yield approximately the same voltage as the off-hook line voltage and cause the terminal equipment to incorrectly sense another off-hook terminal.

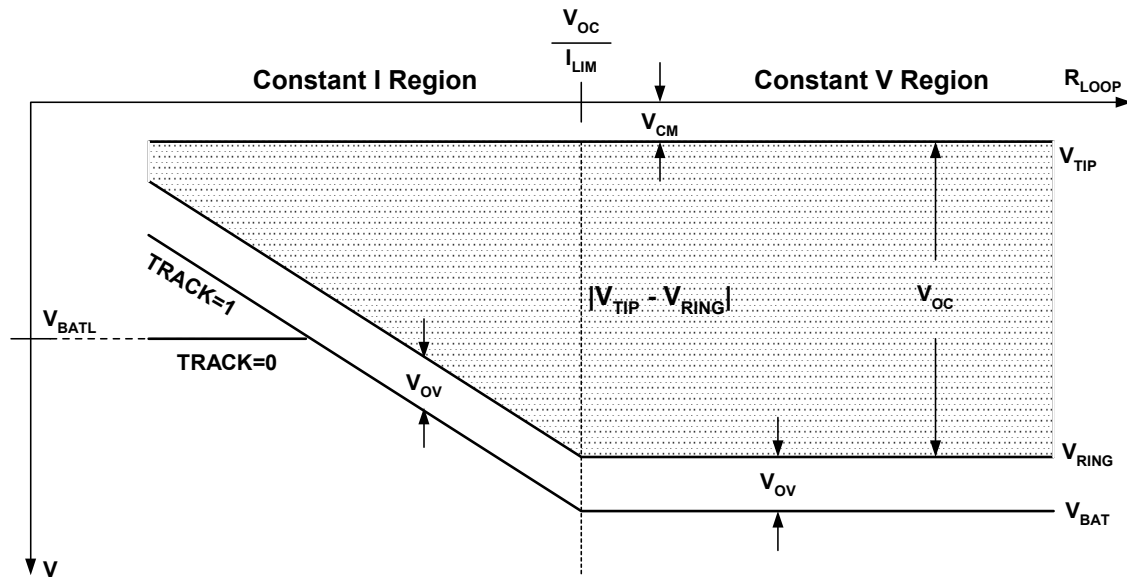


Figure 19. V_{TIP} , V_{RING} and V_{BAT} in the Forward Active State

Table 28. Associated Relevant DC-DC Converter Registers

| Parameter | Range | Resolution | Register Bit | Location |
|---|------------------------------|------------|-------------------|--|
| DC-DC Converter Power-off Control | N/A | N/A | DCOF | Direct Register 14 |
| DC-DC Converter Calibration Enable/Status | N/A | N/A | DCCAL | Direct Register 93 |
| DC-DC Converter PWM Period | 0 to 15.564 μ s | 61.035 ns | DCN[7:0] | Direct Register 92 |
| DC-DC Converter Min. Off Time | (0 to 1.892 μ s) + 4 ns | 61.035 ns | DCTOF[4:0] | Direct Register 93 |
| High Battery Voltage— V_{BATH} | 0 to -94.5 V | 1.5 V | VBATH[5:0] | Direct Register 74 |
| Low Battery Voltage— V_{BATL} | 0 to -94.5 V | 1.5 V | VBATL[5:0] | Direct Register 75 |
| V_{OV} | 0 to -9 V or 0 to -13.5 V | 1.5 V | VMIND[3:0] VOV | Indirect Register 41 Direct Register 66 |

Note: The ProSLIC uses registers that are both directly and indirectly mapped. A “direct” register is one that is mapped directly. An “indirect” register is one that is accessed using the indirect access registers (direct registers 28 through 31).

2.2.5. DC-DC Converter Enhancements

Silicon revisions C and higher support two enhancements to the dc-dc converter. The first is a multi-threshold error control algorithm that enables the dc-dc converter to adjust more quickly to voltage changes. This option is enabled by setting $DCSU = 1$ (direct Register 108, bit 5). The second enhancement is an audio band filter that removes audio band noise from the dc-dc converter control loop. This option is enabled by setting $DCFIL = 1$ (direct Register 108, bit 1).

2.2.6. DC-DC Converter During Ringing

When the ProSLIC enters the ringing state, it requires voltages well above those used in the active mode. The voltage to be generated and regulated by the dc-dc converter during a ringing burst is set using the V_{BATH} register (direct Register 74). V_{BATH} can be set between 0 and -94.5 V in 1.5 V steps. To avoid clipping the ringing signal, V_{BATH} must be set larger than the ringing amplitude. At the end of each ringing burst, the dc-dc converter adjusts back to active state regulation as described above.

2.2.7. External Battery Switching (Si3211 Only)

The Si3211 supports switching between two battery voltages. The circuit for external battery switching is defined in Figure 14. Typically, a high-voltage battery (e.g., -70 V) is used for on-hook and ringing states, and a low-voltage battery (e.g., -24 V) is used for the off-hook condition. The ProSLIC uses an external transistor to switch between the two supplies.

When the ProSLIC changes operating states, it automatically switches battery supplies if the automatic/manual control bit, $ABAT$ (direct Register 67, bit 3), is set.

For example, the ProSLIC will switch from high battery to low battery when it detects an off-hook event through either a ring trip or loop closure event. If automatic battery selection is disabled ($ABAT = 0$), the battery is selected by the Battery Feed Select bit, $BATSL$ (direct Register 66, bit 1).


Silicon revisions C and higher support the option to add a 60 ms debounce period to the battery switching circuit when transitioning from high battery to low battery. This option is enabled by setting $SWDB = 1$ (direct Register 108, bit 3). This debounce minimizes battery transitions in the case of pulse dialing or other quick on-hook to off-hook transitions.

2.3. Tone Generation

Two digital tone generators are provided in the ProSLIC. They allow the generation of a wide variety of single- or dual-tone frequency and amplitude combinations and spare the user the effort of generating the required POTS signaling tones on the PCM highway. DTMF, FSK (caller ID), call progress, and other tones can all be generated on-chip. The tones can be sent to either the receive or transmit paths (see Figure 25 on page 49).

2.3.1. Tone Generator Architecture

A simplified diagram of the tone generator architecture is shown in Figure 20. The oscillator, active/inactive timers, interrupt block, and signal routing block are connected to give the user flexibility in creating audio signals. Control and status register bits are placed in the figure to indicate their association with the tone generator architecture. These registers are described in more detail in Table 29.

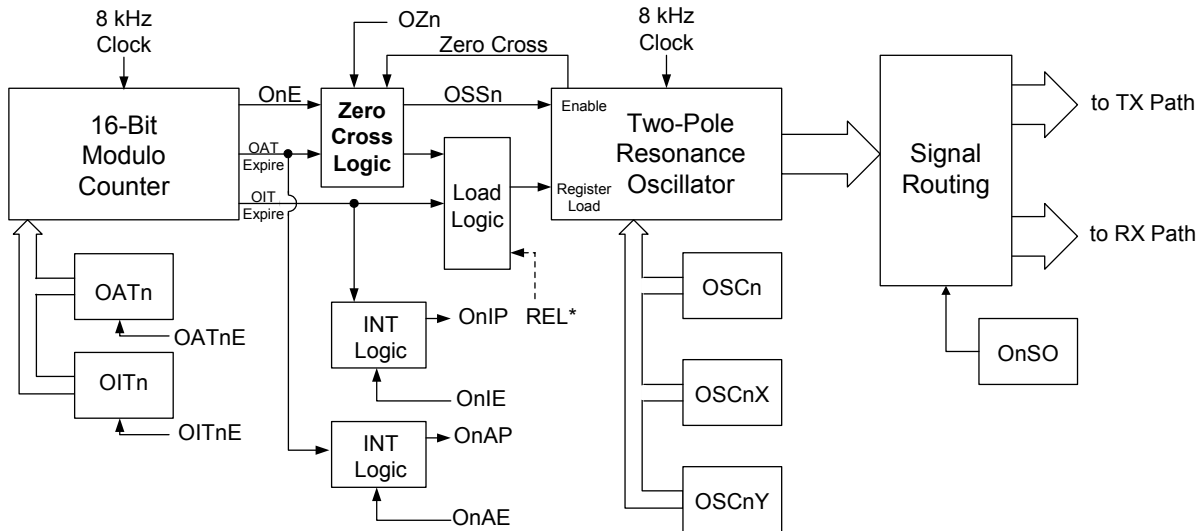

*Tone Generator 1 Only
n = "1" or "2" for Tone Generator 1 and 2, respectively

Figure 20. Simplified Tone Generator Diagram

2.3.2. Oscillator Frequency and Amplitude

Each of the two tone generators contains a two-pole resonate oscillator circuit with a programmable frequency and amplitude, which are programmed via indirect registers OSC1, OSC1X, OSC1Y, OSC2, OSC2X, and OSC2Y. The sample rate for the two oscillators is 8000 Hz. The equations are as follows:

$$\text{coeff}_n = \cos(2\pi f_n / 8000 \text{ Hz}),$$

where f_n is the frequency to be generated;

$$\text{OSC}_n = \text{coeff}_n \times (2^{15});$$

$$\text{OSC}_{nX} = \frac{1}{4} \times \sqrt{\frac{1 - \text{coeff}}{1 + \text{coeff}}} \times (2^{15} - 1) \times \frac{\text{Desired } V_{\text{rms}}}{1.11 V_{\text{rms}}}$$

where desired V_{rms} is the amplitude to be generated;

$$\text{OSC}_{nY} = 0,$$

n = 1 or 2 for oscillator 1 or oscillator 2, respectively.

For example, in order to generate a DTMF digit of 8, the two required tones are 852 Hz and 1336 Hz. Assuming the generation of half-scale values (ignoring twist) is desired, the following values are calculated:

$$\text{coeff}_1 = \cos\left(\frac{2\pi 852}{8000}\right) = 0.78434$$

$$\text{OSC}_1 = 0.78434(2^{15}) = 25701 = 6465\text{h}$$

$$\text{OSC}_{1X} = \frac{1}{4} \times \sqrt{\frac{0.21556}{1.78434}} \times (2^{15} - 1) \times 0.5 = 1424 = 590\text{h}$$

$$\text{OSC}_{1Y} = 0$$

$$\text{coeff}_2 = \cos\left(\frac{2\pi 1336}{8000}\right) = 0.49819$$

$$\text{OSC}_2 = 0.49819(2^{15}) = 16324 = 3\text{FC}4\text{h}$$

$$\text{OSC}_{2X} = \frac{1}{4} \times \sqrt{\frac{0.50181}{1.49819}} \times (2^{15} - 1) \times 0.5 = 2370 = 942\text{h}$$

$$\text{OSC}_{2Y} = 0$$

The above computed values would be written to the corresponding registers to initialize the oscillators. Once the oscillators are initialized, the oscillator control registers can be accessed to enable the oscillators and direct their outputs.

2.3.3. Tone Generator Cadence Programming

Each of the two tone generators contains two timers, one for setting the active period and one for setting the inactive period. The oscillator signal is generated during the active period and suspended during the inactive period. Both the active and inactive periods can be programmed from 0 to 8 seconds in 125 μs steps. The active period time interval is set using OAT1 (direct registers 36 and 37) for tone generator 1 and OAT2 (direct registers 40 and 41) for tone generator 2.

To enable automatic cadence for tone generator 1, define the OAT1 and OIT1 registers and then set the O1TAE bit (direct Register 32, bit 4) and O1TIE bit (direct Register 32, bit 3). This enables each of the timers to control the state of the Oscillator Enable bit, O1E (direct Register 32, bit 2). The 16-bit counter will begin counting until the active timer expires, at which

time the 16-bit counter will reset to zero and begin counting until the inactive timer expires. The cadence continues until the user clears the O1TAE and O1TIE control bits. The zero crossing detect feature can be implemented by setting the OZ1 bit (direct Register 32, bit 5). This ensures that each oscillator pulse ends without a dc component. The timing diagram in Figure 21 is an example of an output cadence using the zero crossing feature.

One-shot oscillation can be achieved by enabling O1E and O1TAE. Direct control over the cadence can be achieved by controlling the O1E bit (direct Register 32, bit 2) directly if O1TAE and O1TIE are disabled.

The operation of tone generator 2 is identical to that of tone generator 1 using its respective control registers.

Note: Tone Generator 2 should not be enabled simultaneously with the ringing oscillator due to resource sharing within the hardware.

Continuous phase frequency-shift keying (FSK) waveforms may be created using tone generator 1 (not available on tone generator 2) by setting the REL bit (direct Register 32, bit 6), which enables reloading of the OSC1, OSC1X, and OSC1Y registers at the expiration of the active timer, OAT1.

Table 29. Associated Tone Generator Registers

| Tone Generator 1 | | | |
|--|------------------------------|--|--------------------------|
| Parameter | Description / Range | Register Bits | Location |
| Oscillator 1 Frequency Coefficient | Sets oscillator frequency | OSC1[15:0] | Indirect Register 13 |
| Oscillator 1 Amplitude Coefficient | Sets oscillator amplitude | OSC1X[15:0] | Indirect Register 14 |
| Oscillator 1 initial phase coefficient | Sets initial phase | OSC1Y[15:0] | Indirect Register 15 |
| Oscillator 1 Active Timer | 0 to 8 seconds | OAT1[15:0] | Direct Registers 36 & 37 |
| Oscillator 1 Inactive Timer | 0 to 8 seconds | OIT1[15:0] | Direct Register 38 & 39 |
| Oscillator 1 Control | Status and control registers | OSS1, REL, OZ1, O1TAE, O1TIE, O1E, O1SO[1:0] | Direct Register 32 |
| Tone Generator 2 | | | |
| Parameter | Description/Range | Register | Location |
| Oscillator 2 Frequency Coefficient | Sets oscillator frequency | OSC2[15:0] | Indirect Register 16 |
| Oscillator 2 Amplitude Coefficient | Sets oscillator amplitude | OSC2X[15:0] | Indirect Register 17 |
| Oscillator 2 initial phase coefficient | Sets initial phase | OSC2Y[15:0] | Indirect Register 18 |
| Oscillator 2 Active Timer | 0 to 8 seconds | OAT2[15:0] | Direct Registers 40 & 41 |
| Oscillator 2 Inactive Timer | 0 to 8 seconds | OIT2[15:0] | Direct Register 42 & 43 |
| Oscillator 2 Control | Status and control registers | OSS2, OZ2, O2TAE, O2TIE, O2E, O2SO[1:0] | Direct Register 33 |

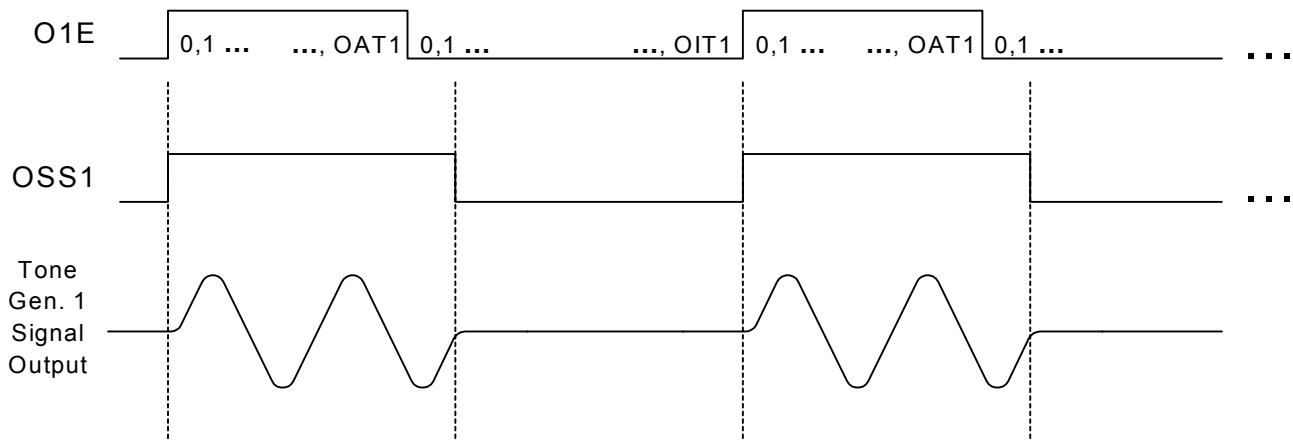


Figure 21. Tone Generator Timing Diagram

2.3.4. Enhanced FSK Waveform Generation

Silicon revisions C and higher support enhanced FSK generation capabilities, which can be enabled by setting FSKEN = 1 (direct Register 108, bit 6) and REN = 1 (direct Register 32, bit 6). In this mode, the user can define mark (1) and space (0) attributes once during initialization by defining indirect registers 99–104. The user need only indicate 0-to-1 and 1-to-0 transitions in the information stream. By writing to FSKDAT (direct Register 52), this mode applies a 24 kHz sample rate to tone generator 1 to give additional resolution to timers and frequency generation. “AN32: Si321x Frequency Shift Keying (FSK) Modulation” gives detailed instructions on how to implement FSK in this mode. Additionally, sample source code is available from Silicon Laboratories upon request.

2.3.5. Tone Generator Interrupts

Both the active and inactive timers can generate their own interrupt to signal “on/off” transitions to the software. The timer interrupts for tone generator 1 can be individually enabled by setting the O1AE and O1IE bits (direct Register 21, bits 0 and 1, respectively). Timer interrupts for tone generator two are O2AE and O2IE (direct Register 21, bits 2 and 3, respectively). A pending interrupt for each of the timers is determined by reading the O1AP, O1IP, O2AP, and O2IP bits in the Interrupt Status 1 register (direct Register 18, bits 0 through 3, respectively).

2.4. Ringing Generation

The ProSLIC provides fully-programmable internal balanced ringing with or without a dc offset to ring a wide variety of terminal devices. All parameters associated with ringing (ringing frequency, waveform, amplitude, dc offset, and ringing cadence) are software-programmable. Both sinusoidal and trapezoidal ringing waveforms are supported, and the trapezoidal crest factor is programmable. Ringing signals of up to 88 V peak or more can be generated, enabling the ProSLIC to drive a 5 REN (1380 Ω + 40 μF) ringer load across loop lengths of 2000 feet (160 Ω) or more.

2.4.1. Ringing Architecture

The ringing generator architecture is nearly identical to that of the tone generator. The sinusoidal ringing waveform is generated using an internal two-pole resonance oscillator circuit with programmable frequency and amplitude. However, since ringing frequencies are very low compared to the audio band signaling frequencies, the ringing waveform is generated at a rate of 1 kHz instead of 8 kHz.

The ringing generator has two timers that function the same as the tone generator timers. They allow on/off cadence settings of up to 8 seconds on and 8 seconds off. In addition to controlling ringing cadence, these timers control the transition into and out of the ringing state. Table 30 summarizes the list of registers used for ringing generation.

Note: Tone generator 2 should not be enabled concurrently with the ringing generator due to resource sharing within the hardware.

Table 30. Registers for Ringing Generation

| Parameter | Range/ Description | Register Bits | Location |
|--|---|---------------|----------------------------|
| Ringing Waveform | Sine/Trapezoid | TSWS | Direct Register 34 |
| Ringing Voltage Offset Enable | Enabled/ Disabled | RVO | Direct Register 34 |
| Ringing Active Timer Enable | Enabled/ Disabled | RTAE | Direct Register 34 |
| Ringing Inactive Timer Enable | Enabled/ Disabled | RTIE | Direct Register 34 |
| Ringing Oscillator Enable | Enabled/ Disabled | ROE | Direct Register 34 |
| Ringing Oscillator Active Timer | 0 to 8 seconds | RAT[15:0] | Direct Registers 48 and 49 |
| Ringing Oscillator Inactive Timer | 0 to 8 seconds | RIT[15:0] | Direct Registers 50 and 51 |
| Linefeed Control (Initiates Ringing State) | Ringing State = 100b | LF[2:0] | Direct Register 64 |
| High Battery Voltage | 0 to -94.5 V | VBATH[5:0] | Direct Register 74 |
| Ringing dc voltage offset | 0 to 94.5 V | ROFF[15:0] | Indirect Register 19 |
| Ringing frequency | 15 to 100 Hz | RCO[15:0] | Indirect Register 20 |
| Ringing amplitude | 0 to 94.5 V | RNGX[15:0] | Indirect Register 21 |
| Ringing initial phase | Sets initial phase for sinewave and period for trapezoid | RNGY[15:0] | Indirect Register 22 |
| Common Mode Bias Adjust During Ringing | 0 to 22.5 V | VCMR[3:0] | Indirect Register 40 |
| Note: The ProSLIC uses registers that are both directly and indirectly mapped. A “direct” register is one that is mapped directly. An “indirect” register is one that is accessed using the indirect access registers (direct registers 28 through 31). | | | |

When the ringing state is invoked by writing LF[2:0] = 100 (direct Register 64), the ProSLIC will go into the ringing state and start the first ring. At the expiration of RAT, the ProSLIC will turn off the ringing waveform and will go to the on-hook transmission state. At the expiration of RIT, ringing will again be initiated. This process will continue as long as the two timers are enabled and the Linefeed Control register is set to the ringing state.

2.4.2. Sinusoidal Ringing

To configure the ProSLIC for sinusoidal ringing, the frequency and amplitude are initialized by writing to the following indirect registers: RCO, RNGX, and RNGY. The equations for RCO, RNGX, RNGY are as follows:

$$RCO = \text{coeff} \times (2^{15})$$

where

$$\text{coeff} = \cos\left(\frac{2\pi f}{1000 \text{ Hz}}\right)$$

and f = desired ringing frequency in Hertz.

$$RNGX = \frac{1}{4} \times \sqrt{\frac{1 - \text{coeff}}{1 + \text{coeff}}} \times 2^{15} \times \frac{\text{Desired } V_{PK}(0 \text{ to } 94.5 \text{ V})}{96 \text{ V}}$$

$$RNGY = 0$$

The minimum allowed peak TIP-to-RING ringing voltage depends on the linefeed state. In the forward active linefeed state, the selected ringing amplitude (RNGX, Indirect Register 21) plus the selected ringing dc voltage offset (ROFF, Indirect Register 19) must be greater than the selected on-hook line voltage setting (VOC, direct Register 72). In the reverse active linefeed state, the selected ringing amplitude (RNGX, Indirect Register 21) minus the selected ringing dc voltage offset (ROFF, Indirect Register 19) must be greater than the selected on-hook line voltage setting (VOC, direct Register 72).

Using a 70 VPK 20 Hz ringing signal as an example, the equations are as follows:

$$\text{coeff} = \cos\left(\frac{2\pi \times 20}{1000 \text{ Hz}}\right) = 0.99211$$

$$RCO = 0.99211 \times (2^{15}) = 32509 = 7EFDh$$

$$RNGX = \frac{1}{4} \times \sqrt{\frac{0.00789}{1.99211}} \times 2^{15} \times \frac{70}{96} = 376 = 0177h$$

$$RNGY = 0$$

In addition, the user must select the sinusoidal ringing waveform by writing TSWS = 0 (direct Register 34, bit 0).

2.4.3. Trapezoidal Ringing

In addition to the sinusoidal ringing waveform, the ProSLIC supports trapezoidal ringing. Figure 22 illustrates a trapezoidal ringing waveform with offset V_{ROFF} .

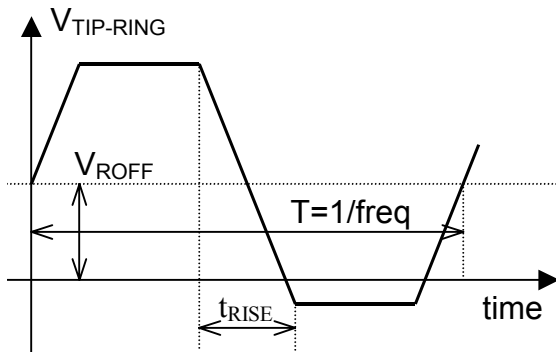


Figure 22. Trapezoidal Ringing Waveform

To configure the ProSLIC for trapezoidal ringing, the user should follow the same basic procedure as in the Sinusoidal Ringing section, but using the following equations:

$$RNGY = \frac{1}{2} \times \text{Period} \times 8000$$

$$RNGX = \frac{\text{Desired } V_{PK}}{96 V} \times (2^{15})$$

$$RCO = \frac{2 \times RNGX}{t_{RISE} \times 8000}$$

RCO is a value added or subtracted from the waveform to ramp the signal up or down in a linear fashion. This value is a function of rise time, period, and amplitude, where rise time and period are related through the following equation for the crest factor of a trapezoidal waveform.

$$t_{RISE} = \frac{3}{4} T \left(1 - \frac{1}{CF^2} \right)$$

where T = ringing period, and CF = desired crest factor.

For example, to generate a 71 V_{PK} , 20 Hz ringing signal, the equations are as follows:

$$RNGY(20 \text{ Hz}) = \frac{1}{2} \times \frac{1}{20 \text{ Hz}} \times 8000 = 200 = C8h$$

$$RNGX(71 V_{PK}) = \frac{71}{96} \times 2^{15} = 24235 = 5EABh$$

For a crest factor of 1.3 and a period of 0.05 seconds (20 Hz), the rise time requirement is 0.0153 seconds.

$$\begin{aligned} RCO(20 \text{ Hz, 1.3 crest factor}) \\ = \frac{2 \times 24235}{0.0153 \times 8000} = 396 = 018Ch \end{aligned}$$

In addition, the user must select the trapezoidal ringing waveform by writing TSWS = 1 in direct Register 34.

2.4.4. Ringing DC voltage Offset

A dc offset can be added to the ac ringing waveform by defining the offset voltage in ROFF (indirect Register 19). The offset, V_{ROFF} , is added to the ringing signal when RVO is set to 1 (direct Register 34, bit 1). The value of ROFF is calculated as follows:

$$ROFF = \frac{V_{ROFF}}{96} \times 2^{15}$$

2.4.5. Linefeed Considerations During Ringing

Care must be taken to keep the generated ringing signal within the ringing voltage rails (GNDA and V_{BAT}) to maintain proper biasing of the external bipolar transistors. If the ringing signal nears the rails, a distorted ringing signal and excessive power dissipation in the external transistors results.

To prevent this invalid operation, set the V_{BATH} value (direct Register 74) to a value higher than the maximum peak ringing voltage. The discussion below outlines the considerations and equations that govern the selection of the V_{BATH} setting for a particular desired peak ringing voltage.

First, the required amount of ringing overhead voltage, V_{OVR} , is calculated based on the maximum value of current through the load, $I_{LOAD,PK}$, the minimum current gain of Q5 and Q6, and a reasonable voltage required to keep Q5 and Q6 out of saturation. For ringing signals up to $V_{PK} = 87 \text{ V}$, $V_{OVR} = 7.5 \text{ V}$ is a safe value. However, to determine V_{OVR} for a specific case, use the equations below.

$$I_{LOAD,PK} = \frac{V_{AC,PK}}{R_{LOAD}} + I_{OS} = V_{AC,PK} \times \frac{N_{REN}}{6.9 \text{ k}\Omega} + I_{OS}$$

where:

N_{REN} is the ringing REN load (max value = 5),

I_{OS} is the offset current flowing in the line driver circuit (max value = 2 mA), and

$V_{AC,PK}$ = amplitude of the ac ringing waveform.

It is good practice to provide a buffer of a few more milliamperes for $I_{LOAD,PK}$ to account for possible line leakages, etc. The total $I_{LOAD,PK}$ current should be smaller than 80 mA.

$$V_{OVR} = I_{LOAD,PK} \times \frac{\beta + 1}{\beta} \times (80.6 \Omega + 1 V)$$

where β is the minimum expected current gain of transistors Q5 and Q6.

The minimum value for V_{BATH} is therefore given by the following:

$$V_{BATH} = V_{AC,PK} + V_{ROFF} + V_{OVR}$$

The ProSLIC is designed to create a fully-balanced ringing waveform, meaning that the TIP and RING common mode voltage, $(V_{TIP} + V_{RING})/2$, is fixed. This voltage is referred to as V_{CM_RING} and is automatically set to the following:

$$V_{CM_RING} = \frac{V_{BATH} - V_{CMR}}{2}$$

V_{CMR} is an indirect register, which provides the headroom by the ringing waveform with respect to the V_{BATH} rail. The value is set as a 4-bit setting in indirect Register 40 with an LSB voltage of 1.5 V/LSB. Register 40 should be set with the calculated V_{OVR} to provide voltage headroom during ringing.

Silicon revisions C and higher support the option to briefly increase the maximum differential current limit between the voltage transition of TIP and RING from

ringing to a dc linefeed state. This mode is enabled by setting $ILIMEN = 1$ (direct Register 108, bit 7).

2.4.6. Ring Trip Detection

A ring trip event signals that the terminal equipment has gone off-hook during the ringing state. The ProSLIC performs ring trip detection digitally using its on-chip A/D converter. The functional blocks required to implement ring trip detection are shown in Figure 23. The primary input to the system is the loop current sense (LCS) value provided by the current monitoring circuitry and reported in direct Register 79. LCS data is processed by the input signal processor when the ProSLIC is in the ringing state as indicated by the Linefeed Shadow register (direct Register 64). The data then feeds into a programmable digital low-pass filter that removes unwanted ac signal components before threshold detection.

The output of the low-pass filter is compared to a programmable threshold, RTP (indirect Register 29). The threshold comparator output feeds a programmable debouncing filter. The output of the debouncing filter remains in its present state unless the input remains in the opposite state for the entire period of time programmed by the ring trip debounce interval, $RTDI[6:0]$ (direct Register 70). If the debounce interval has been satisfied, the RTP bit of direct Register 68 will be set to indicate that a valid ring trip has occurred. A ring trip interrupt is generated if enabled by the $RTIE$ bit (direct Register 22). Table 31 lists the registers that must be written or monitored to correctly detect a ring trip condition.

The recommended values for RTP , $NRTP$, and $RTDI$ vary according to the programmed ringing frequency. Register values for various ringing frequencies are given in Table 32.

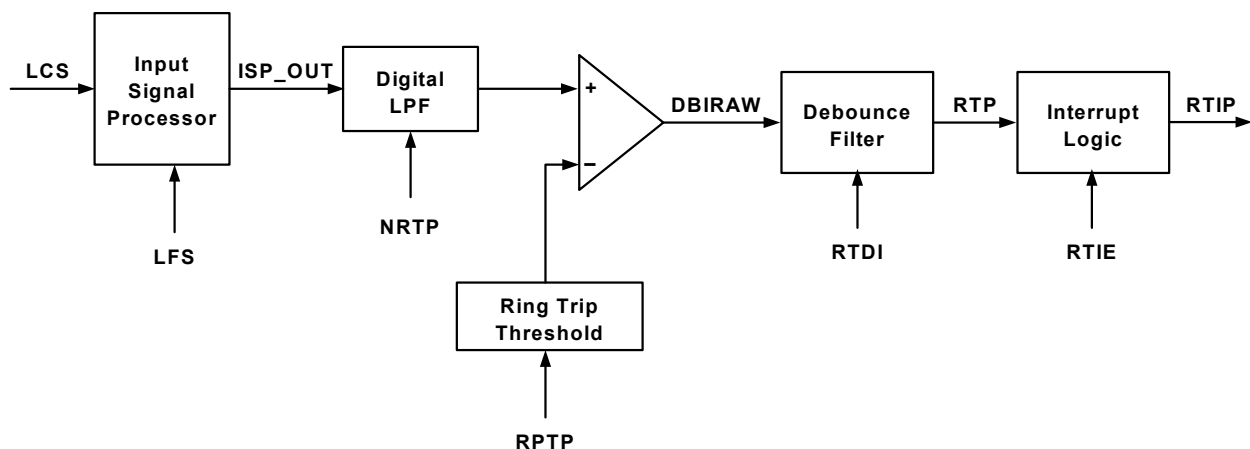


Figure 23. Ring Trip Detector

Table 31. Associated Registers for Ring Trip Detection

| Parameter | Register | Location |
|--|------------|----------------------|
| Ring Trip Interrupt Pending | RTIP | Direct Register 19 |
| Ring Trip Interrupt Enable | RTIE | Direct Register 22 |
| Ring Trip Detect Debounce Interval | RTDI[6:0] | Direct Register 70 |
| Ring Trip Threshold | RPTP[5:0] | Indirect Register 29 |
| Ring Trip Filter Coefficient | NRTP[12:0] | Indirect Register 36 |
| Ring Trip Detect Status (monitor only) | RTP | Direct Register 68 |

Note: The ProSLIC uses registers that are both directly and indirectly mapped. A “direct” register is one that is mapped directly. An “indirect” register is one that is accessed using the indirect access registers (direct registers 28 through 31).

Table 32. Recommended Ring Trip Values for Ringing

| Ringing Frequency | NRTP | | RPTP | | RTDI | |
|-------------------|---------|------|---------|------|---------|-----|
| | decimal | hex | decimal | hex | decimal | hex |
| Hz | | | | | | |
| 16.667 | 64 | 0200 | 34 mA | 3600 | 15.4 ms | 0F |
| 20 | 100 | 0320 | 34 mA | 3600 | 12.3 ms | 0B |
| 30 | 112 | 0380 | 34 mA | 3600 | 8.96 ms | 09 |
| 40 | 128 | 0400 | 34 mA | 3600 | 7.5 ms | 07 |
| 50 | 213 | 06A8 | 34 mA | 3600 | 5 ms | 05 |
| 60 | 256 | 0800 | 34 mA | 3600 | 4.8 ms | 05 |

2.5. Pulse Metering Generation

There is an additional tone generator suitable for generating tones above the audio frequency. This oscillator is provided for the generation of billing tones that are typically 12 kHz or 16 kHz. The generator follows the same algorithm as described in "2.3. Tone Generation" on page 39 with the exception that the sample rate for computation is 64 kHz instead of 8 kHz. The equations are as follows:

$$\text{coeff} = \cos\left(\frac{2\pi f}{64000 \text{ Hz}}\right)$$

$$\text{PLSCO} = \text{coeff} \times (2^{15} - 1)$$

$$\text{PLSX} = \frac{1}{4} \sqrt{\frac{1 - \text{coeff}}{1 + \text{coeff}}} \times (2^{15} - 1) \times \frac{\text{Desired } V_{\text{rms}}}{\text{Full Scale } V_{\text{rms}}}$$

where full scale $V_{\text{rms}} = 0.85 V_{\text{rms}}$ for a matched load.

The initial phase of the pulse metering signal is set to 0 internally; so, there is no register to serve this purpose.

The pulse metering generator timers and associated pulse metering timer registers are similar to those of the tone generators. These timers count 8 kHz sample periods like the other tones even though the sinusoid is generated at 64 kHz.

Table 33. Associated Pulse Metering Generator Registers

| Parameter | Description / Range | Register Bits | Location |
|---------------------------------------|------------------------------|-------------------------|--------------------------|
| Pulse Metering Frequency Coefficient | Sets oscillator frequency | PLSCO[15:0] | Indirect Register 25 |
| Pulse Metering Amplitude Coefficient | Sets oscillator amplitude | PLSX[15:0] | Indirect Register 24 |
| Pulse Metering Attack/Decay Ramp Rate | 0 to PLSX (full amplitude) | PLSD[15:0] | Indirect Register 23 |
| Pulse Metering Active Timer | 0 to 8 seconds | PAT[15:0] | Direct Registers 44 & 45 |
| Pulse Metering Inactive Timer | 0 to 8 seconds | PIT[15:0] | Direct Register 46 & 47 |
| Pulse Metering Control | Status and control registers | PSTAT, PMAE, PMIE, PMOE | Direct Register 35 |

Note: The ProSLIC uses registers that are both directly and indirectly mapped. A direct register is one that is mapped directly. An indirect register is one that is accessed using the indirect access registers (direct registers 28 through 31).

The pulse metering oscillator has a volume envelope (linear ramp) on the on/off transitions of the oscillator. The volume value is incremented by the value in the PLSD register (indirect Register 23) at an 8 kHz rate. The sinusoidal generator output is multiplied by this volume before being sent to the DAC. The volume will ramp from 0 to 7FFF in increments of PLSD; so, the value of PLSD will set the slope of the ramp. When the pulse metering signal is turned off, the volume will ramp to 0 by decrementing according to the value of PLSD.

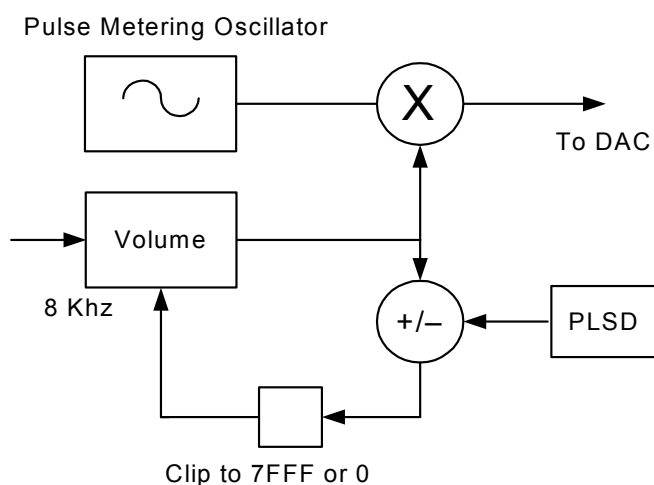


Figure 24. Pulse Metering Volume Envelope

2.6. DTMF Detection

The dual-tone multi-frequency (DTMF) tone signaling standard is also known as touch tone. It is an in-band signaling system used to replace the pulse-dial signaling standard. In DTMF, two tones are used to generate a DTMF digit. One tone is chosen from four possible row tones, and one tone is chosen from four possible column tones. The sum of these tones constitutes one of 16 possible DTMF digits.

2.6.1. DTMF Detection Architecture

DTMF detection is performed using a modified Goertzel algorithm to compute the dual frequency tone (DFT) for each of the eight DTMF frequencies as well as their second harmonics. At the end of the DFT computation, the squared magnitudes of the DFT results for the eight DTMF fundamental tones are computed. The row results are sorted to determine the strongest row frequency; the column frequencies are sorted as well. At the completion of this process, a number of checks are made to determine whether the strongest row and column tones constitute a DTMF digit.

The detection process is performed twice within the 45 ms minimum tone time. A digit must be detected on two consecutive tests following a pause to be recognized as a new digit. If all tests pass, an interrupt is generated, and the DTMF digit value is loaded into the DTMF register. If tones occur at the maximum rate of 100 ms per digit, the interrupt must be serviced within 85 ms so that the current digit is not overwritten by a new one. There is no buffering of the digit information.

2.7. Audio Path

Unlike traditional SLICs, the codec function is integrated into the ProSLIC. The 16-bit codec offers programmable gain/attenuation blocks and several loopback modes. The signal path block diagram is shown in Figure 25.

2.7.1. Transmit Path

In the transmit path, the analog signal fed by the external ac coupling capacitors is amplified by the analog transmit amplifier, ATX, prior to the A/D converter. The gain of the ATX is user-selectable to one of mute/−3.5/0/3.5 dB options. The main role of ATX is to coarsely adjust the signal swing to be as close as possible to the full-scale input of the A/D converter in order to maximize the signal-to-noise ratio of the transmit path. After passing through an anti-aliasing filter, the analog signal is processed by the A/D converter, producing an 8 kHz, 16-bit wide, linear PCM data stream. The standard requirements for transmit path attenuation for signals above 3.4 kHz are implemented as part of the combined decimation filter characteristic of the A/D converter. One more digital filter is available in the transmit path: THPF. THPF implements the high-pass attenuation requirements for signals below 65 Hz. The linear PCM data stream output from THPF is amplified by the transmit-path programmable gain amplifier, ADCG, which can be programmed from $-\infty$ dB to 6 dB. The DTMF decoder can receive the linear PCM data stream at this point to perform the digit extraction when enabled by the user. The final step in transmit path signal processing is the user-selectable A-law or μ -law compression, which can reduce the data stream word width to 8 bits. Depending on the PCM_Mode register selection, every 8-bit compressed serial data word will occupy one time slot on the PCM highway, or every 16-bit uncompressed serial data word will occupy two time slots on the PCM highway.

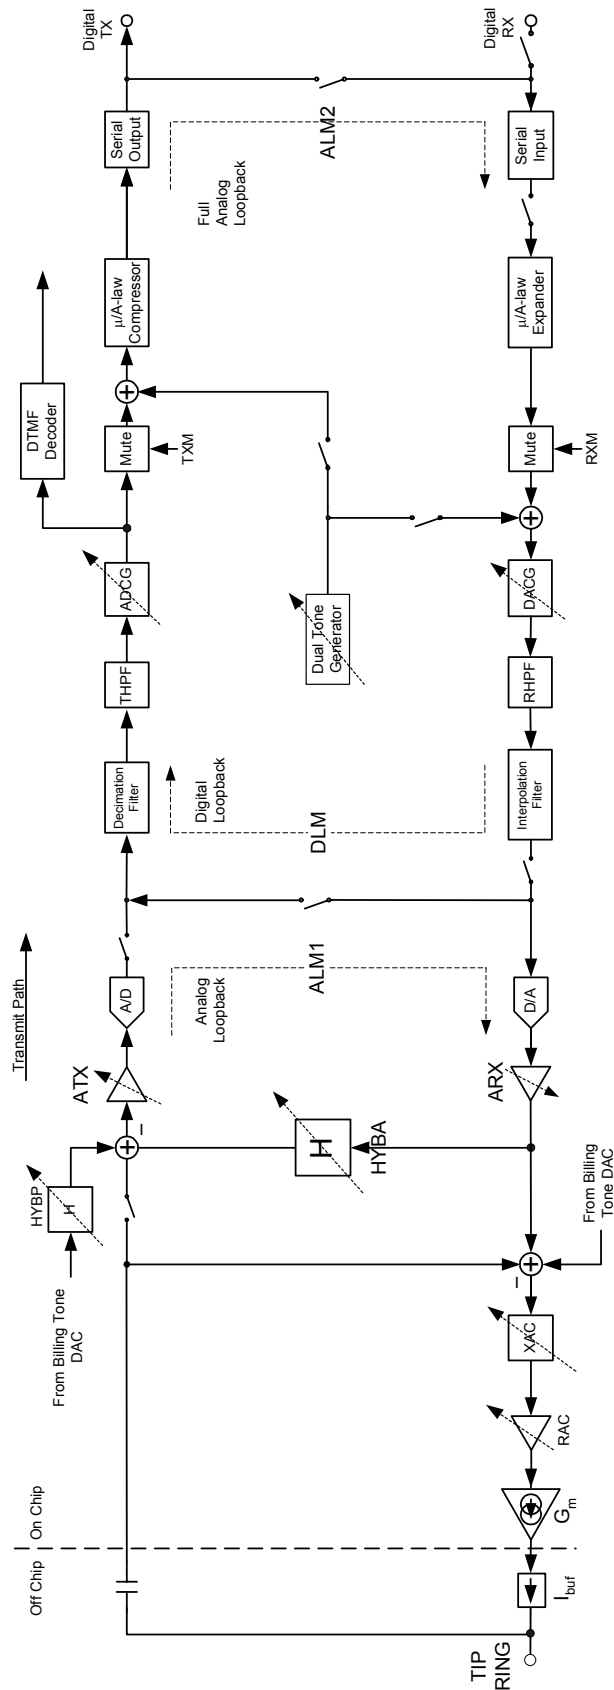


Figure 25. AC Signal Path Block Diagram

2.7.2. Receive Path

In the receive path, the optionally-compressed 8-bit data is first expanded to 16-bit words. The PCMF register bit can bypass the expansion process, in which case two 8-bit words are assembled into one 16-bit word. DACG is the receive path programmable gain amplifier, which can be programmed from $-\infty$ dB to 6 dB. An 8 kHz, 16-bit signal is then provided to a D/A converter. The resulting analog signal is amplified by the analog receive amplifier, ARX, which is user-selectable to one of several options: mute, -3.5 , 0, or 3.5 dB. It is then applied at the input of the transconductance amplifier (Gm), which drives the off-chip current buffer (I_{BUF}).

2.7.3. Audio Characteristics

The dominant source of distortion and noise in both the transmit and receive paths is the quantization noise introduced by the μ -law or the A-law compression process. Figure 1 on page 7 specifies the minimum signal-to-noise-and-distortion ratio for either path for a sine wave input of 200 Hz to 3400 Hz.

Both the μ -law and the A-law speech encoding allow the audio codec to transfer and process audio signals larger than 0 dBm0 without clipping. The maximum PCM code is generated for a μ -law encoded sine wave of 3.17 dBm0 or an A-law encoded sine wave of 3.14 dBm0. The ProSLIC overload clipping limits are driven by the PCM encoding process. Figure 2 on page 7 shows the acceptable limits for the analog-to-analog fundamental power transfer-function, which bounds the behavior of ProSLIC.

The transmit path gain distortion versus frequency is shown in Figure 3 on page 8. The same figure also presents the minimum required attenuation for any out-of-band analog signal that may be applied on the line. Note the presence of a high-pass filter transfer function that ensures at least 30 dB of attenuation for signals below 65 Hz. The low-pass filter transfer function that attenuates signals above 3.4 kHz has to exceed the requirements specified by the equations in Figure 3 on page 8 and is implemented as part of the A-to-D converter.

The receive path transfer function requirement, shown in Figure 4 on page 9, is very similar to the transmit path transfer function. The most notable difference is the absence of the high-pass filter portion. The only other differences are the maximum 2 dB of attenuation at 200 Hz (as opposed to 3 dB for the transmit path) and the 28 dB of attenuation for any frequency above 4.6 kHz. The PCM data rate is 8 kHz and, thus, no frequencies greater than 4 kHz can be digitally encoded in the data stream.

From this point of view, at frequencies greater than 4 kHz, the plot in Figure 4 should be interpreted as the maximum allowable magnitude of any spurious signals that are generated when a PCM data stream representing a sine wave signal in the range of 300 Hz to 3.4 kHz at a level of 0 dBm0 is applied at the digital input.

The group delay distortion in either path is limited to no more than the levels indicated in Figure 5 on page 10. The reference in Figure 5 is the smallest group delay for a sine wave in the range of 500 Hz to 2500 Hz at 0 dBm0.

The block diagram for the voice-band signal processing paths is shown in Figure 25. Both the receive and transmit paths employ the optimal combination of analog and digital signal processing to provide maximum performance while offering sufficient flexibility to allow users to optimize for their particular ProSLIC application. All programmable signal-processing blocks are indicated symbolically in Figure 25 by a dashed arrow across them. The two-wire (TIP/RING) voice-band interface to the ProSLIC is implemented using a small number of external components. The receive path interface consists of a unity-gain current buffer, I_{BUF} , while the transmit path interface is simply an ac coupling capacitor. Signal paths, although implemented differentially, are shown as single-ended for simplicity.

2.7.4. Transhybrid Balance

The ProSLIC provides programmable transhybrid balance with gain block H. (See Figure 25.) In the ideal case, where the synthesized SLIC impedance exactly matches the subscriber loop impedance, the transhybrid balance should be set to subtract a -6 dB level from the transmit path signal. The transhybrid balance gain can be adjusted from -2.77 dB to $+4.08$ dB around the ideal setting of -6 dB by programming the HYBA[2:0] bits of the Hybrid Control register (direct Register 11). Note that adjusting any of the analog or digital gain blocks will not require any modification of the transhybrid balance gain block, as the transhybrid gain is subtracted from the transmit path signal prior to any gain adjustment stages. If desired, the transhybrid balance can also be disabled using the appropriate register setting.

2.7.5. Loopback Testing

Four loopback test options are available in the ProSLIC:

- The full analog loopback (ALM2) tests almost all the circuitry of both the transmit and receive paths. The compressed 8-bit word transmit data stream is fed back serially to the input of the receive path expander. (See Figure 25.) The signal path starts with the analog signal at the input of the transmit

path and ends with an analog signal at the output of the receive path.

- An additional analog loopback (ALM1) takes the digital stream at the output of the A/D converter and feeds it back to the D/A converter. (See Figure 25.) The signal path starts with the analog signal at the input of the transmit path and ends with an analog signal at the output of the receive path. This loopback option allows testing of the analog signal processing circuitry of the Si3210 to be carried out completely independently of any activity in the DSP.
- The full digital loopback tests almost all the circuitry of both the transmit and receive paths. The analog signal at the output of the receive path are fed back to the input of the transmit path by way of the hybrid filter path. (See Figure 25.) The signal path starts with 8-bit PCM data input to the receive path and ends with 8-bit PCM data at the output of the transmit path. The user can bypass the companding process and interface directly to the 16-bit data.
- An additional digital loopback (DLM) takes the digital stream at the input of the D/A converter in the receive path and feeds it back to the transmit A/D digital filter. The signal path starts with 8-bit PCM data input to the receive path and ends with 8-bit PCM data at the output of the transmit path. This loopback option allows the testing of the digital signal processing circuitry of the Si3210 to be carried out completely independently of any analog signal processing activity. The user can bypass the companding process and interface directly to the 16-bit data.

2.8. Two-Wire Impedance Matching

The ProSLIC provides on-chip, programmable, two-wire impedance settings to meet a wide variety of worldwide two-wire return loss requirements. The two-wire impedance is programmed by loading one of the eight available impedance values into the TISS[2:0] bits of the Two-Wire Impedance Synthesis Control register (direct Register 10). If direct Register 10 is not user-defined, the default setting of 600 Ω will be loaded into the TISS register.

Real and complex two-wire impedances are realized by internal feedback of a programmable amplifier (RAC), a switched capacitor network (XAC), and a transconductance amplifier (G_m). (See Figure 25.) RAC creates the real portion, and XAC creates the imaginary portion of G_m 's input. G_m then creates a current that models the desired impedance value to the subscriber loop. The differential ac current is fed to the subscriber loop via the ITIPP and IRINGP pins through an off-chip current buffer, I_{BUF} , which is implemented using

transistors Q1 and Q2 (see Figure 13 on page 24). G_m is referenced to an off-chip resistor (R_{15}).

The ProSLIC also provides a means of compensating for degraded subscriber loop conditions involving excessive line capacitance (leakage). The CLC[1:0] bits of direct Register 10 increase the ac signal magnitude to compensate for the additional loss at the high end of the audio frequency range. The default setting of CLC[2:0] assumes no line capacitance.

Silicon revisions C and higher support the option to remove the internal reference resistor used to synthesize ac impedances for 600 + 2.16 μ F and 900 + 2.16 μ F settings so that an external resistor reference may be used. This option is enabled by setting ZSEXT = 1 (direct Register 108, bit 4).

2.9. Clock Generation

The ProSLIC will generate the necessary internal clock frequencies from the PCLK input. PCLK must be synchronous to the 8 kHz FSYNC clock and run at one of the following rates: 256 kHz, 512 kHz, 768 kHz, 1.024 MHz, 1.536 MHz, 2.048 MHz, 4.096 MHz or 8.192 MHz. (Note that 768 kHz and 1.536 MHz are not valid rates for GCI mode.) The ratio of the PCLK rate to the FSYNC rate is determined via a counter clocked by PCLK. The three-bit ratio information is automatically transferred into an internal register, PLL_MULT, following a reset of the ProSLIC. The PLL_MULT is used to control the internal PLL, which multiplies PCLK as needed to generate the 16.384 MHz rate needed to run the internal filters and other circuitry.

The PLL clock synthesizer settles very quickly following powerup. However, the settling time depends on the PCLK frequency, and it can be approximated by the following equation:

$$T_{\text{SETTLE}} = \frac{64}{F_{\text{PCLK}}}$$

2.10. Interrupt Logic

The ProSLIC is capable of generating interrupts for the following events:

- Loop current/ring ground detected
- Ring trip detected
- Power alarm
- DTMF digit detected
- Active timer 1 expired
- Inactive timer 1 expired
- Active timer 2 expired
- Inactive timer 2 expired
- Ringing active timer expired
- Ringing inactive timer expired

- Pulse metering active timer expired
- Pulse metering inactive timer expired
- Indirect register access complete

The interface to the interrupt logic consists of six registers. Three interrupt status registers contain one bit for each of the above interrupt functions. These bits will be set when an interrupt is pending for the associated resource. Three interrupt enable registers also contain one bit for each interrupt function. In the case of the interrupt enable registers, the bits are active high. Refer to the appropriate functional description section for operational details of the interrupt functions.

When a resource reaches an interrupt condition, it will signal an interrupt to the interrupt control block. The interrupt control block will then set the associated bit in the interrupt status register if the enable bit for that interrupt is set. The INT pin is a NOR of the bits of the interrupt status registers. Therefore, if a bit in the interrupt status registers is asserted, IRQ will assert low. Upon receiving the interrupt, the interrupt handler should read interrupt status registers to determine which resource is requesting service. To clear a pending interrupt, write the desired bit in the appropriate interrupt status register to 1. Writing a 0 has no effect. This provides a mechanism for clearing individual bits when multiple interrupts occur simultaneously. While the interrupt status registers are non-zero, the INT pin will remain asserted.

2.11. Serial Peripheral Interface

The control interface to the ProSLIC is a 4-wire interface modeled after commonly-available micro-controller and serial peripheral devices. The interface consists of a clock (SCLK), chip select (\overline{CS}), serial data input (SDI), and serial data output (SDO). Data is transferred a byte at a time with each register access consisting of a pair of byte transfers. Figures 26 and 27 illustrate read and write operation in the SPI bus.

The first byte of the pair is the command/address byte. The MSB of this byte indicates a register read when 1 and a register write when 0. The remaining seven bits of the command/address byte indicate the address of the register to be accessed. The second byte of the pair is the data byte. Because the falling edge of \overline{CS} provides resynchronization of the SPI state machine in the event of a framing error, it is recommended (but not required) that \overline{CS} be taken high between byte transfers as shown in Figures 26 and 27.

During a read operation, the SDO becomes active and the 8-bit contents of the register are driven out MSB first. The SDO will be high impedance on either the falling edge of SCLK following the LSB, or the rising of \overline{CS} as specified by the SPIM bit (direct Register 0,

bit 6). SDI is a “don’t care” during the data portion of read operations. During write operations, data is driven into the ProSLIC via the SDI pin MSB first. The SDO pin will remain high impedance during write operations. Data always transitions with the falling edge of the clock and is latched on the rising edge. The clock should return to a logic high when no transfer is in progress.

Indirect registers are accessed through direct registers 29 through 30. Instructions on how to access them is described in “3. Control Registers” beginning on page 59.

There are a number of variations of usage on this four-wire interface:

- **Continuous Clocking:** During continuous clocking, the data transfers are controlled by the assertion of the \overline{CS} pin. \overline{CS} must assert before the falling edge of SCLK on which the first bit of data is expected during a read cycle, and must remain low for the duration of the 8-bit transfer (command/address or data).
- **SDI/SDO Wired Operation:** Independent of the clocking options described, SDI and SDO can be treated as two separate lines or wired together if the master is capable of tristating its output during the data byte transfer of a read operation.
- **Daisy Chain Mode:** This mode allows communication with banks of up to eight ProSLIC devices using one chip select signal. When the SPIDC bit in the SPI Mode Select register is set, data transfer mode changes to a 3-byte operation: a chip select byte, an address/control byte, and a data byte. Using the circuit shown in Figure 28, a single device may select from the bank of devices by setting the appropriate chip select bit to 1. Each device uses the LSB of the chip select byte, shifts the data right by one bit, and passes the chip select byte using the SDITHRU pin to the next device in the chain. Address/control and data bytes are unaltered.

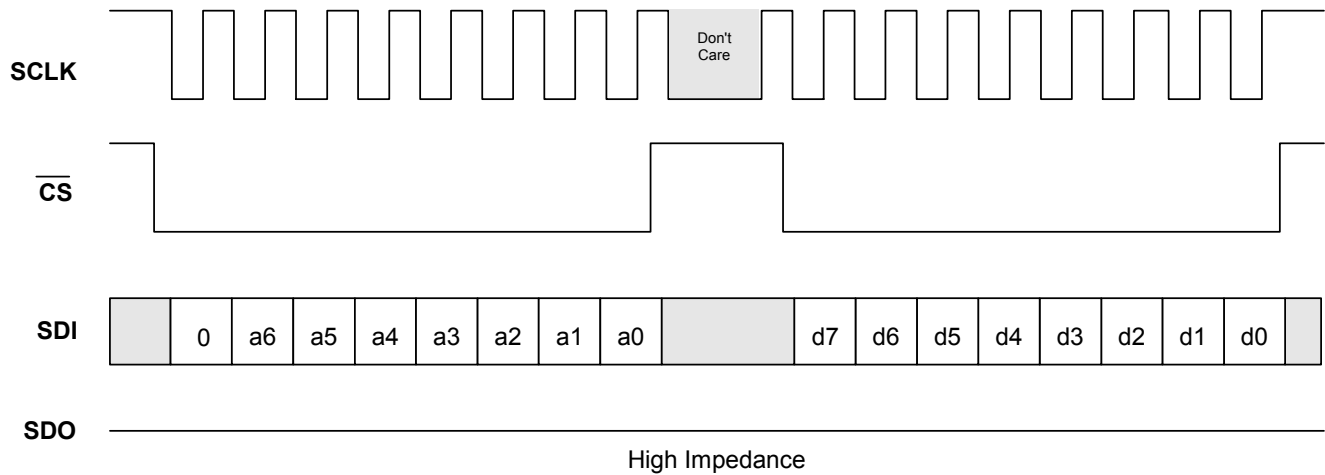


Figure 26. Serial Write 8-Bit Mode


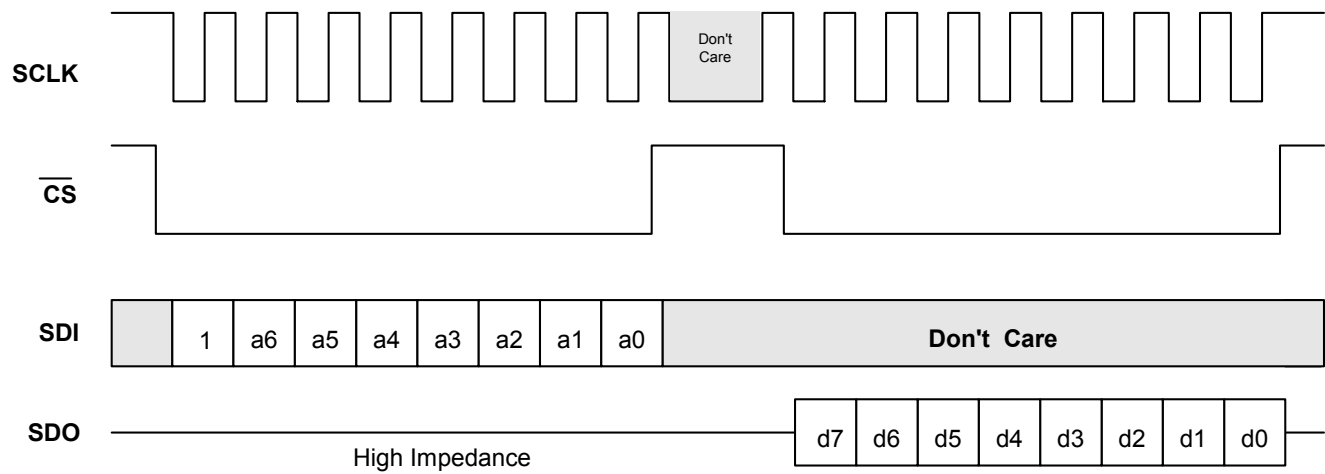


Figure 27. Serial Read 8-Bit Mode

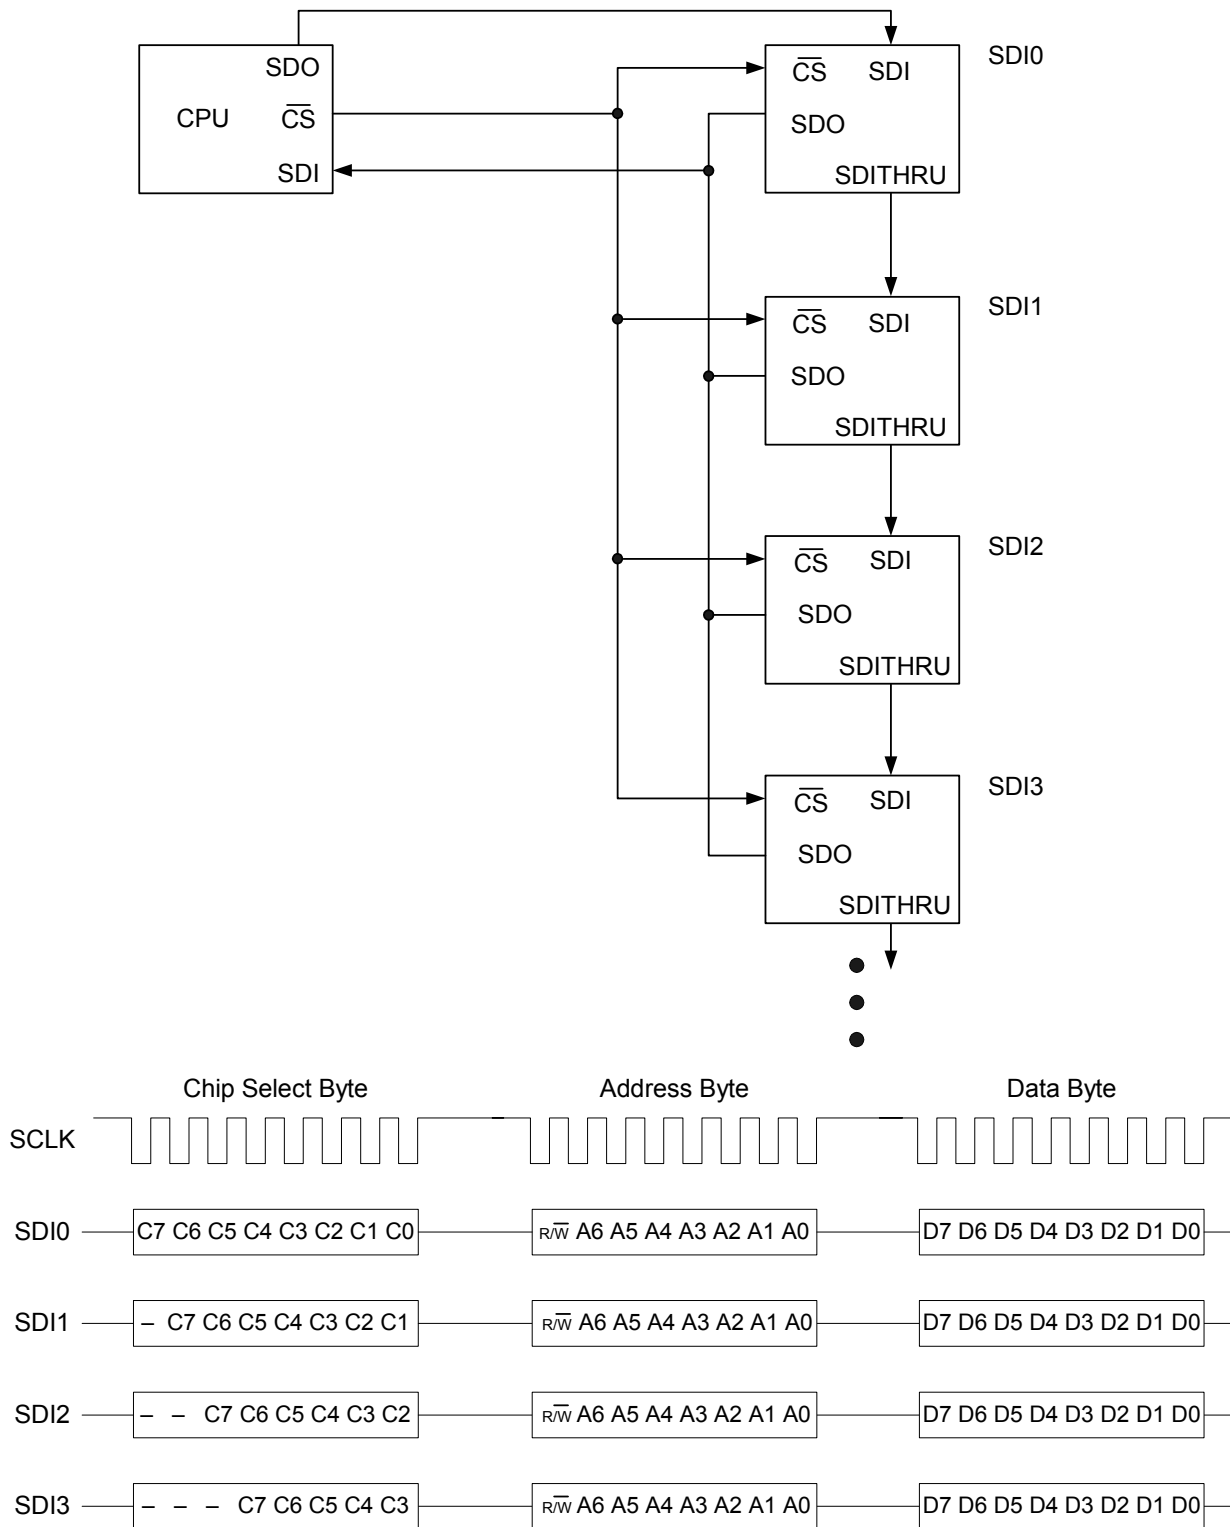

Note: During chip select byte, SDITHRU = SDI delayed by one SCLK. Each device daisy-chained looks at the LSB of the chip select byte for its chip select.

Figure 28. SPI Daisy Chain Mode

2.12. PCM Interface

The ProSLIC contains a flexible programmable interface for the transmission and reception of digital PCM samples. PCM data transfer is controlled via the PCLK and FSYNC inputs as well as PCM Mode Select (direct Register 1), PCM Transmit Start Count (direct registers 2 and 3), and PCM Receive Start Count (direct registers 4 and 5). The interface can be configured to support from 4 to 128 8-bit timeslots in each frame. This corresponds to PCLK frequencies of 256 kHz to 8.192 MHz in power of 2 increments. (768 kHz and 1.536 MHz are also available, but these frequencies are not valid for GCI mode.) Timeslots for data transmission and reception are independently configured using the TXS and RXS registers. By setting the correct starting point of the data, the ProSLIC can be configured to support long FSYNC and short FSYNC variants as well as IDL2 8-bit, 10-bit, B1 and B2 channel time slots. DTX data is high-impedance except for the duration of the 8-bit PCM transmit.

DTX will return to high impedance either on the negative edge of PCLK during the LSB or on the positive edge of PCLK following the LSB. This is based on the setting of the TRI bit of the PCM Mode Select register. Tristating on the negative edge allows the transmission of data by multiple sources in adjacent timeslots without the risk of driver contention. In addition to 8-bit data modes, there is a 16-bit mode provided. This mode can be activated via the PCMT bit of the PCM Mode Select register. GCI timing is also supported in which the duration of a data bit is two PCLK cycles. This mode is also activated via the PCM Mode Select register. Setting the TXS or RXS register greater than the number of PCLK cycles in a sample period will stop data transmission because TXS or RXS will never equal the PCLK count. Figures 29–32 illustrate the usage of the PCM highway interface to adapt to common PCM standards.

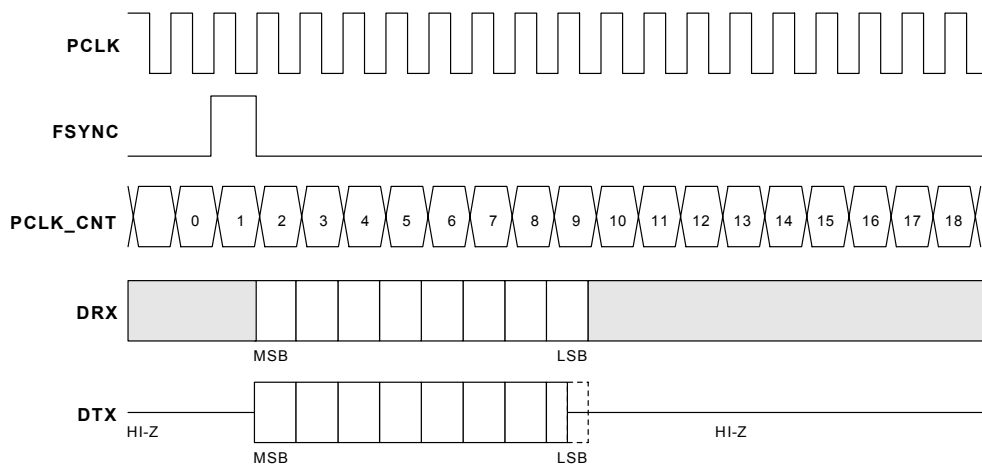


Figure 29. Example, Timeslot 1, Short FSYNC (TXS/RXS = 1)

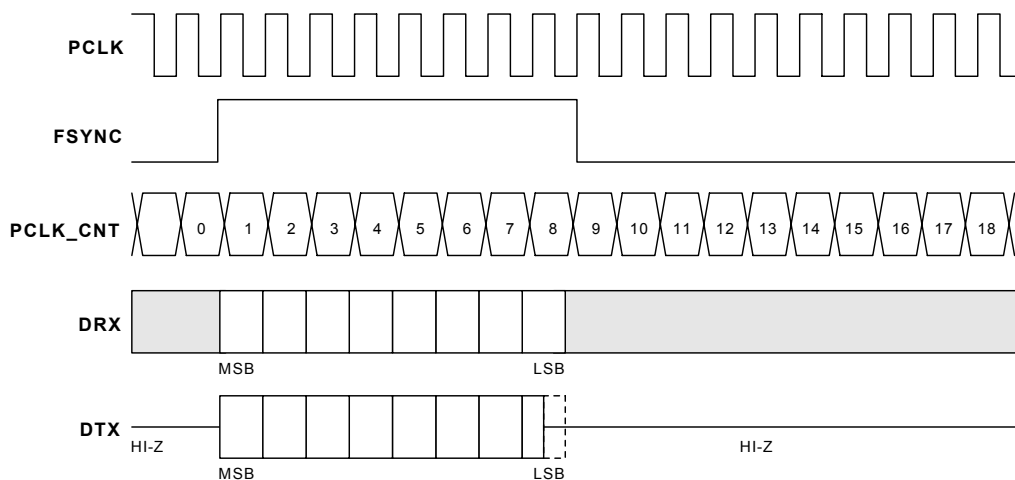


Figure 30. Example, Timeslot 1, Long FSYNC (TXS/RXS = 0)

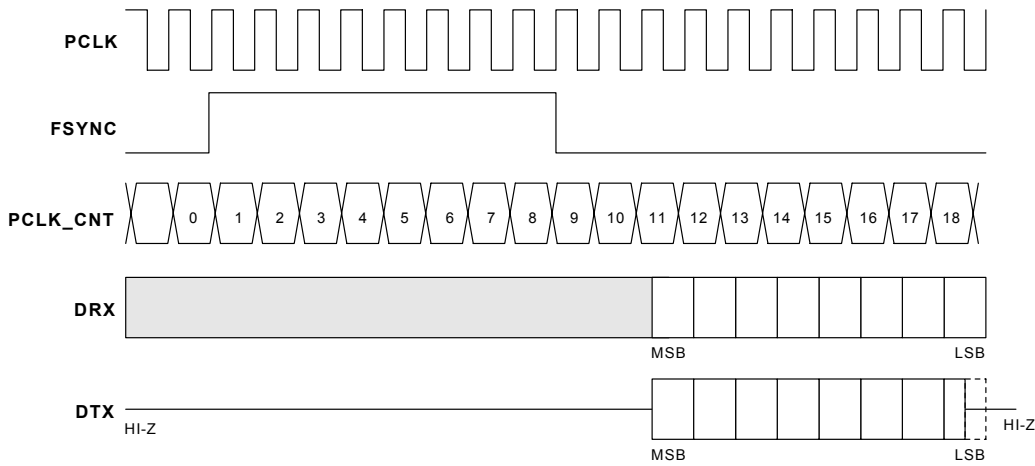


Figure 31. Example, IDL2 Long FSYNC, B2, 10-Bit Mode (TXS/RXS = 10)

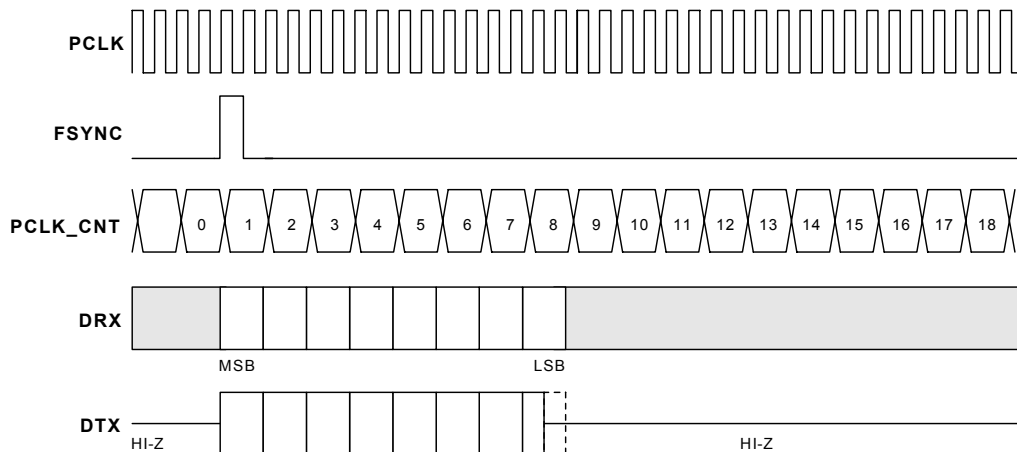


Figure 32. GCI Example, Timeslot 1 (TXS/RXS = 0)

2.13. Companding

The ProSLIC supports both μ -255 Law and A-Law companding formats in addition to linear data. These 8-bit companding schemes follow a segmented curve formatted as sign bit, three chord bits, and four step bits. μ -255 Law is more commonly used in North America and Japan, while A-Law is primarily used in Europe. Data format is selected via the PCMF register. Tables 34 and 35 define the μ -Law and A-Law encoding formats.

Table 34. μ -Law Encode-Decode Characteristics^{1,2}

| Segment Number | #Intervals X Interval Size | Value at Segment Endpoints | Digital Code | Decode Level |
|--|----------------------------|-------------------------------------|--|--------------------------|
| 8 | 16 X 256 | 8159 . . . 4319 4063 | 10000000b 10001111b | 8031 4191 |
| | | . . . 2143 2015 | 10011111b | 2079 |
| 6 | 16 X 64 | . . . 1055 991 | 10101111b | 1023 |
| | | . . . 511 479 | 10111111b | 495 |
| 4 | 16 X 16 | . . . 239 223 | 11001111b | 231 |
| | | . . . 103 95 | 11011111b | 99 |
| 2 | 16 X 4 | . . . 35 31 | 11101111b | 33 |
| | | . . . 3 1 0 | 11111110b 11111111b | 2 0 |
| 1 | 15 X 2 | . . . 3 1 0 | 11111110b 11111111b | 2 0 |
| | 1 X 1 | | | |
| Notes: | | | | |
| 1. Characteristics are symmetrical about analog zero with sign bit = 0 for negative analog values. | | | | |
| 2. Digital code includes inversion of all magnitude bits. | | | | |

Table 35. A-Law Encode-Decode Characteristics^{1,2}

| Segment Number | #intervals X interval size | Value at segment endpoints | Digital Code | Decode Level |
|----------------|----------------------------|--|------------------------------------|--------------------------|
| 7 | 16 X 128 | 4096 3968 . . 2176 2048 | 10101010b 10100101b | 4032 2112 |
| 6 | 16 X 64 | . . . 1088 1024 | 10110101b | 1056 |
| 5 | 16 X 32 | . . . 544 512 | 10000101b | 528 |
| 4 | 16 X 16 | . . . 272 256 | 10010101b | 264 |
| 3 | 16 X 8 | . . . 136 128 | 11100101b | 132 |
| 2 | 16 X 4 | . . . 68 64 | 11110101b | 66 |
| 1 | 32 X 2 | . . . 2 0 | 11010101b | 1 |

Notes:

1. Characteristics are symmetrical about analog zero with sign bit = 0 for negative values.
2. Digital code includes inversion of all even numbered bits.

3. Control Registers

Note: Any register not listed here is reserved and must not be written.

Table 36. Direct Register Summary

| Register | Name | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|---------------------------------|--------------------------------------|----------|-----------|----------|-------------------|-------------------|-------------------|------------------|------------------|
| Setup | | | | | | | | | |
| 0 | SPI Mode Select | SPIDC | SPIM | PNI[1:0] | | RNI[3:0] | | | |
| 1 | PCM Mode Select | PNI2 | | PCME | PCMF[1:0] | PCMT | GCI | TRI | |
| 2 | PCM Transmit Start Count—Low Byte | TXS[7:0] | | | | | | | |
| 3 | PCM Transmit Start Count—High Byte | | | | | | | TXS[9:8] | |
| 4 | PCM Receive Start Count—Low Byte | RXS[7:0] | | | | | | | |
| 5 | PCM Receive Start Count—High Byte | | | | | | | RXS[9:8] | |
| 6 | Digital Input/Output Control | | | | DOUT ¹ | DIO2 ¹ | DIO1 ¹ | PD2 ¹ | PD1 ¹ |
| Audio | | | | | | | | | |
| 8 | Audio Path Loopback Control | | | | | | ALM2 | DLM | ALM1 |
| 9 | Audio Gain Control | RXHP | TXHP | TXM | RXM | ATX[1:0] | | ARX[1:0] | |
| 10 | Two-Wire Impedance Synthesis Control | | | CLC[1:0] | | TISE | TISS[2:0] | | |
| 11 | Hybrid Control | | HYBP[2:0] | | | | HYBA[2:0] | | |
| Powerdown | | | | | | | | | |
| 14 | Powerdown Control 1 | | | PMON | DCOF ² | MOF | | BIASOF | SLICOF |
| 15 | Powerdown Control 2 | | | ADCM | ADCON | DACM | DACON | GMM | GMON |
| Interrupts | | | | | | | | | |
| 18 | Interrupt Status 1 | PMIP | PMAP | RGIP | RGAP | O2IP | O2AP | O1IP | O1AP |
| 19 | Interrupt Status 2 | Q6AP | Q5AP | Q4AP | Q3AP | Q2AP | Q1AP | LCIP | RTIP |
| 20 | Interrupt Status 3 | | | | | | CMCP | INDP | DTMFP |
| 21 | Interrupt Enable 1 | PMIE | PMAE | RGIE | RGAE | O2IE | O2AE | O1IE | O1AE |
| 22 | Interrupt Enable 2 | Q6AE | Q5AE | Q4AE | Q3AE | Q2AE | Q1AE | LCIE | RTIE |
| 23 | Interrupt Enable 3 | | | | | | CMCE | INDE | DTMFE |
| 24 | Decode Status | | | | VAL | DIG[3:0] | | | |
| Indirect Register Access | | | | | | | | | |
| Notes: | | | | | | | | | |
| 1. Si3211 only. | | | | | | | | | |
| 2. Si3210 only. | | | | | | | | | |

Table 36. Direct Register Summary (Continued)

| Register | Name | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|--------------------|---|------------|-------|-------|-------|-------|-------|-----------|-------|
| 28 | Indirect Data Access—Low Byte | IDA[7:0] | | | | | | | |
| 29 | Indirect Data Access—High Byte | IDA[15:8] | | | | | | | |
| 30 | Indirect Address | IAA[7:0] | | | | | | | |
| 31 | Indirect Address Status | | | | | | | | IAS |
| Oscillators | | | | | | | | | |
| 32 | Oscillator 1 Control | OSS1 | REL | OZ1 | O1TAE | O1TIE | O1E | O1SO[1:0] | |
| 33 | Oscillator 2 Control | OSS2 | | OZ2 | O2TAE | O2TIE | O2E | O2SO[1:0] | |
| 34 | Ringing Oscillator Control | RSS | | RDAC | RTAE | RTIE | ROE | RVO | TSWS |
| 35 | Pulse Metering Oscillator Control | PSTAT | | | PMAE | PMIE | PMOE | | |
| 36 | Oscillator 1 Active Timer—Low Byte | OAT1[7:0] | | | | | | | |
| 37 | Oscillator 1 Active Timer—High Byte | OAT1[15:8] | | | | | | | |
| 38 | Oscillator 1 Inactive Timer—Low Byte | OIT1[7:0] | | | | | | | |
| 39 | Oscillator 1 Inactive Timer—High Byte | OIT1[15:8] | | | | | | | |
| 40 | Oscillator 2 Active Timer—Low Byte | OAT2[7:0] | | | | | | | |
| 41 | Oscillator 2 Active Timer—High Byte | OAT2[15:8] | | | | | | | |
| 42 | Oscillator 2 Inactive Timer—Low Byte | OIT2[7:0] | | | | | | | |
| 43 | Oscillator 2 Inactive Timer—High Byte | OIT2[15:8] | | | | | | | |
| 44 | Pulse Metering Oscillator Active Timer—Low Byte | PAT[7:0] | | | | | | | |
| 45 | Pulse Metering Oscillator Active Timer—High Byte | PAT[15:8] | | | | | | | |
| 46 | Pulse Metering Oscillator Inactive Timer—Low Byte | PIT[7:0] | | | | | | | |
| Notes: | | | | | | | | | |
| 1. Si3211 only. | | | | | | | | | |
| 2. Si3210 only. | | | | | | | | | |

Table 36. Direct Register Summary (Continued)

| Register | Name | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-----------------|--|-----------|-----------|------------|------------------|--------------------|------------|--------------------|--------------------|
| 47 | Pulse Metering Oscillator Inactive Timer—High Byte | PIT[15:8] | | | | | | | |
| 48 | Ringling Oscillator Active Timer—Low Byte | RAT[7:0] | | | | | | | |
| 49 | Ringling Oscillator Active Timer—High Byte | RAT[15:8] | | | | | | | |
| 50 | Ringling Oscillator Inactive Timer—Low Byte | RIT[7:0] | | | | | | | |
| 51 | Ringling Oscillator Inactive Timer—High Byte | RIT[15:8] | | | | | | | |
| 52 | FSK Data | | | | | | | | FSKDAT |
| SLIC | | | | | | | | | |
| 63 | Loop Closure Debounce Interval for Automatic Ringing | LCD[7:0] | | | | | | | |
| 64 | Linefeed Control | | LFS[2:0] | | | | LF[2:0] | | |
| 65 | External Bipolar Transistor Control | | SQH | CBY | ETBE | ETBO[1:0] | | ETBA[1:0] | |
| 66 | Battery Feed Control | | | | VOV ² | FVBAT ² | | BATSL ¹ | TRACK ² |
| 67 | Automatic/Manual Control | | MNCM | MNDIF | SPDS | ABAT | AORD | AOLD | AOPN |
| 68 | Loop Closure/Ring Trip Detect Status | | | | | | DBIRAW | RTP | LCR |
| 69 | Loop Closure Debounce Interval | | LCDI[6:0] | | | | | | |
| 70 | Ring Trip Detect Debounce Interval | | RTDI[6:0] | | | | | | |
| 71 | Loop Current Limit | | | | | | ILIM[2:0] | | |
| 72 | On-Hook Line Voltage | | VSGN | VOC[5:0] | | | | | |
| 73 | Common Mode Voltage | | | VCM[5:0] | | | | | |
| 74 | High Battery Voltage | | | VBATH[5:0] | | | | | |
| 75 | Low Battery Voltage | | | VBATL[5:0] | | | | | |
| 76 | Power Monitor Pointer | | | | | | PWRMP[2:0] | | |
| 77 | Line Power Output Monitor | | PWRM[7:0] | | | | | | |
| 78 | Loop Voltage Sense | | LVSP | LVS[5:0] | | | | | |
| Notes: | | | | | | | | | |
| 1. Si3211 only. | | | | | | | | | |
| 2. Si3210 only. | | | | | | | | | |

Si3210/Si3211

Table 36. Direct Register Summary (Continued)

| Register | Name | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|----------|---|------------------------|-------|--------------------|-------------------------|-------|--------|--------|-------|
| 79 | Loop Current Sense | | LCSP | LCS[5:0] | | | | | |
| 80 | TIP Voltage Sense | VTIP[7:0] | | | | | | | |
| 81 | RING Voltage Sense | VRING[7:0] | | | | | | | |
| 82 | Battery Voltage Sense 1 | VBATS1[7:0] | | | | | | | |
| 83 | Battery Voltage Sense 2 | VBATS2[7:0] | | | | | | | |
| 84 | Transistor 1 Current Sense | IQ1[7:0] | | | | | | | |
| 85 | Transistor 2 Current Sense | IQ2[7:0] | | | | | | | |
| 86 | Transistor 3 Current Sense | IQ3[7:0] | | | | | | | |
| 87 | Transistor 4 Current Sense | IQ4[7:0] | | | | | | | |
| 88 | Transistor 5 Current Sense | IQ5[7:0] | | | | | | | |
| 89 | Transistor 6 Current Sense | IQ6[7:0] | | | | | | | |
| 92 | DC-DC Converter PWM Period | DCN[7:0] ² | | | | | | | |
| 93 | DC-DC Converter Switching Delay | DCCAL ² | | DCPOL ² | DCTOF[4:0] ² | | | | |
| 94 | DC-DC Converter PWM Pulse Width | DCPW[7:0] ² | | | | | | | |
| 95 | Reserved | | | | | | | | |
| 96 | Calibration Control/ Status Register 1 | | CAL | CALSP | CALR | CALT | CALD | CALC | CALIL |
| 97 | Calibration Control/ Status Register 2 | | | | CALM1 | CALM2 | CALDAC | CALADC | CALCM |
| 98 | RING Gain Mismatch Calibration Result | | | | CALGMR[4:0] | | | | |
| 99 | TIP Gain Mismatch Calibration Result | | | | CALGMT[4:0] | | | | |
| 100 | Differential Loop Current Gain Calibration Result | | | | CALGD[4:0] | | | | |
| 101 | Common Mode Loop Current Gain Calibration Result | | | | CALGC[4:0] | | | | |

Notes:

1. Si3211 only.
2. Si3210 only.

Table 36. Direct Register Summary (Continued)

| Register | Name | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-----------------|--|-------------|-------|-------------------|-------------|-------------|-------|--------------------|--------|
| 102 | Current Limit Calibration Result | | | | | CALGIL[3:0] | | | |
| 103 | Monitor ADC Offset Calibration Result | CALMG1[3:0] | | | CALMG2[3:0] | | | | |
| 104 | Analog DAC/ADC Offset | | | | | DACP | DACN | ADCP | ADCN |
| 105 | DAC Offset Calibration Result | DACOF[7:0] | | | | | | | |
| 106 | Common Mode Balance Calibration Result | | | CMBAL[5:0] | | | | | |
| 107 | DC Peak Current Calibration Result | | | | | CMDCPK[3:0] | | | |
| 108 | Enhancement Enable | ILIMEN | FSKEN | DCSU ² | ZSEXT | SWDB | LCVE | DCFIL ² | HYSTEN |
| Notes: | | | | | | | | | |
| 1. Si3211 only. | | | | | | | | | |
| 2. Si3210 only. | | | | | | | | | |

Si3210/Si3211

Register 0. SPI Mode Select

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-------|------|----------|----|----------|----|----|----|
| Name | SPIDC | SPIM | PNI[1:0] | | RNI[3:0] | | | |
| Type | R/W | R/W | R | | R | | | |

Reset settings = 00xx_xxxx

| Bit | Name | Function |
|-----|----------|--|
| 7 | SPIDC | SPI Daisy Chain Mode Enable. 0 = Disable SPI daisy chain mode. 1 = Enable SPI daisy chain mode. |
| 6 | SPIM | SPI Mode. 0 = Causes SDO to tri-state on rising edge of SCLK of $\overline{\text{LSB}}$. 1 = Normal operation; SDO tri-states on rising edge of $\overline{\text{CS}}$. |
| 5:4 | PNI[1:0] | Part Number Identification. 00 = Si3210 01 = Si3211 10 = Unused 11 = Si3210M |
| 3:0 | RNI[3:0] | Revision Number Identification. 0001 = Revision A, 0010 = Revision B, 0011 = Revision C, etc. |

Register 1. PCM Mode Select

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------|----|------|-----------|-----|------|-----|-----|
| Name | PNI2 | | PCME | PCMF[1:0] | | PCMT | GCI | TRI |
| Type | R/W | | R/W | | R/W | R/W | R/W | R/W |

Reset settings = 0000_1000

| Bit | Name | Function |
|-----|-----------|---|
| 7 | PNI2 | Part Number Identification 2. 0 = Si3210/11 family. 1 = Si3215/16 family. |
| 6 | Reserved | Read returns zero. |
| 5 | PCME | PCM Enable. 0 = Disable PCM transfers. 1 = Enable PCM transfers. |
| 4:3 | PCMF[1:0] | PCM Format. 00 = A-Law 01 = μ -Law 10 = Reserved 11 = Linear |
| 2 | PCMT | PCM Transfer Size. 0 = 8-bit transfer. 1 = 16-bit transfer. |
| 1 | GCI | GCI Clock Format. 0 = 1 PCLK per data bit. 1 = 2 PCLKs per data bit. |
| 0 | TRI | Tri-state Bit 0. 0 = Tri-state bit 0 on positive edge of PCLK. 1 = Tri-state bit 0 on negative edge of PCLK. |

Si3210/Si3211

Register 2. PCM Transmit Start Count—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | TXS[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | TXS[7:0] | PCM Transmit Start Count. PCM transmit start count equals the number of PCLKs following FSYNC before data transmission begins. See Figure 29 on page 55. |

Register 3. PCM Transmit Start Count—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|----|----|----|----|----|----------|----|
| Name | | | | | | | TXS[9:8] | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7:2 | Reserved | Read returns zero. |
| 1:0 | TXS[9:8] | PCM Transmit Start Count. PCM transmit start count equals the number of PCLKs following FSYNC before data transmission begins. See Figure 29 on page 55. |

Register 4. PCM Receive Start Count—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | RXS[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7:0 | RXS[7:0] | PCM Receive Start Count. PCM receive start count equals the number of PCLKs following FSYNC before data reception begins. See Figure 29 on page 55. |

Register 5. PCM Receive Start Count—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|----|----|----|----|----|----------|----|
| Name | | | | | | | RXS[9:8] | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7:2 | Reserved | Read returns zero. |
| 1:0 | RXS[9:8] | PCM Receive Start Count. PCM receive start count equals the number of PCLKs following FSYNC before data reception begins. See Figure 29 on page 55. |

Register 6. Digital Input/Output Control

| Si3210 | | | | | | | | |
|--------|----|----|----|----|----|----|----|----|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | | | | | | | | |
| Type | | | | | | | | |

Reset settings = 0000_0000

| Si3211 | | | | | | | | |
|--------|----|----|----|------|------|------|-----|-----|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | | | | DOUT | DIO2 | DIO1 | PD2 | PD1 |
| Type | | | | R/W | R/W | R/W | R/W | R/W |

Reset settings = 0000_0000

Si3210/Si3211

| Bit | Name | Function |
|-----|----------|--|
| 7:5 | Reserved | Read returns zero. |
| 4 | DOUT | DOUT Pin Output Data (Si3211 only). 0 = DOUT pin driven low. 1 = DOUT pin driven high. Si3210 = Reserved. |
| 3 | DIO2 | DIO2 Pin Input/Output Direction (Si3211 only). 0 = DIO2 pin is an input. 1 = DIO2 pin is an output and driven to value of the PD2 bit. Si3210 = Reserved. |
| 2 | DIO1 | DIO1 Pin Input/Output Direction (Si3211 only). 0 = DIO1 pin is an input. 1 = DIO1 pin is an output and driven to value of the PD1 bit. Si3210 = Reserved. |
| 1 | PD2 | DIO2 Pin Data (Si3211 only). When DIO2 = 1: 0 = DIO2 pin driven low. 1 = DIO2 pin driven high. Si3210 = Reserved. When DIO2 = 0, PD2 value equals the logic input of DIO2 pin. |
| 0 | PD1 | DIO1 Pin Data (Si3211 only). When DIO1 = 1: 0 = DIO1 pin driven low. 1 = DIO1 pin driven high. Si3210 = Reserved. When DIO1 = 0, PD1 value equals the logic input of DIO1 pin. |

Register 8. Audio Path Loopback Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|----|----|------|-----|------|
| Name | | | | | | ALM2 | DLM | ALM1 |
| Type | | | | | | R/W | R/W | R/W |

Reset settings = 0000_0010

| Bit | Name | Function |
|-----|----------|---|
| 7:3 | Reserved | Read returns zero. |
| 2 | ALM2 | Analog Loopback Mode 2. (See Figure 25 on page 49.) 0 = Full analog loopback mode disabled. 1 = Full analog loopback mode enabled. |
| 1 | DLM | Digital Loopback Mode. (See Figure 25 on page 49.) 0 = Digital loopback disabled. 1 = Digital loopback enabled. |
| 0 | ALM1 | Analog Loopback Mode 1. (See Figure 25 on page 49.) 0 = Analog loopback disabled. 1 = Analog loopback enabled. |

Si3210/Si3211

Register 9. Audio Gain Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------|------|-----|-----|----------|----|----------|----|
| Name | RXHP | TXHP | TXM | RXM | ATX[1:0] | | ARX[1:0] | |
| Type | R/W | R/W | R/W | R/W | R/W | | R/W | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7 | RXHP | Receive Path High Pass Filter Disable. 0 = HPF enabled in receive path, RHDF. 1 = HPF bypassed in receive path, RHDF. |
| 6 | TXHP | Transmit Path High Pass Filter Disable. 0 = HPF enabled in transmit path, THPF. 1 = HPF bypassed in transmit path, THPF. |
| 5 | TXM | Transmit Path Mute. Refer to position of digital mute in Figure 25 on page 49. 0 = Transmit signal passed. 1 = Transmit signal muted. |
| 4 | RXM | Receive Path Mute. Refer to position of digital mute in Figure 25 on page 49. 0 = Receive signal passed. 1 = Receive signal muted. |
| 3:2 | ATX[1:0] | Analog Transmit Path Gain. 00 = 0 dB 01 = -3.5 dB 10 = 3.5 dB 11 = ATX gain = 0 dB; analog transmit path muted. |
| 1:0 | ARX[1:0] | Analog Receive Path Gain. 00 = 0 dB 01 = -3.5 dB 10 = 3.5 dB 11 = Analog receive path muted. |

Register 10. Two-Wire Impedance Synthesis Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|----|----------|-----|------|-----------|----|----|
| Name | | | CLC[1:0] | | TISE | TISS[2:0] | | |
| Type | R/W | | | R/W | | R/W | | |

Reset settings = 0000_1000

| Bit | Name | Function |
|-----|-----------|---|
| 7:6 | Reserved | Read returns zero. |
| 5:4 | CLC[1:0] | Line Capacitance Compensation. 00 = Off 01 = 4.7 nF 10 = 10 nF 11 = Reserved |
| 3 | TISE | Two-Wire Impedance Synthesis Enable. 0 = Two-wire impedance synthesis disabled. 1 = Two-wire impedance synthesis enabled. |
| 2:0 | TISS[2:0] | Two-Wire Impedance Synthesis Selection. 000 = 600 Ω 001 = 900 Ω 010 = 600 Ω + 2.16 μ F 011 = 900 Ω + 2.16 μ F 100 = CTR21 (270 Ω + 750 Ω 150 nF) 101 = Australia/New Zealand #1 (220 Ω + 820 Ω 120 nF) 110 = Slovakia/Slovenia/South Africa (220 Ω + 820 Ω 115 nF) 111 = New Zealand #2 (370 Ω + 620 Ω 310 nF) |

Si3210/Si3211

Register 11. Hybrid Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|-----------|----|-----|----|-----------|----|----|
| Name | | HYBP[2:0] | | | | HYBA[2:0] | | |
| Type | R/W | | | R/W | | | | |

Reset settings = 0011_0011

| Bit | Name | Function |
|-----|-----------|---|
| 7 | Reserved | Read returns zero. |
| 6:4 | HYBP[2:0] | Pulse Metering Hybrid Adjustment. 000 = 4.08 dB 001 = 2.5 dB 010 = 1.16 dB 011 = 0 dB 100 = -1.02 dB 101 = -1.94 dB 110 = -2.77 dB 111 = Off |
| 3 | Reserved | Read returns zero. |
| 2:0 | HYBA[2:0] | Audio Hybrid Adjustment. 000 = 4.08 dB 001 = 2.5 dB 010 = 1.16 dB 011 = 0 dB 100 = -1.02 dB 101 = -1.94 dB 110 = -2.77 dB 111 = Off |

Register 14. Powerdown Control 1

| Si3210 | | | | | | | | |
|--------|----|----|------|------|-----|----|--------|--------|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | | | PMON | DCOF | MOF | | BIASOF | SLICOF |
| Type | | | R/W | R/W | R/W | | R/W | R/W |

Reset settings = 0001_0000

| Si3211 | | | | | | | | |
|--------|----|----|------|----|-----|----|--------|--------|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | | | PMON | | MOF | | BIASOF | SLICOF |
| Type | | | R/W | | R/W | | R/W | R/W |

Reset settings = 0001_0000

| Bit | Name | Function |
|-----|----------|--|
| 7:6 | Reserved | Read returns zero. |
| 5 | PMON | Pulse Metering DAC Power-On Control. 0 = Automatic power control. 1 = Override automatic control and force pulse metering DAC circuitry on. |
| 4 | DCOF | DC-DC Converter Power-Off Control (Si3210 only). 0 = Automatic power control. 1 = Override automatic control and force dc-dc circuitry off. Si3211 = Read returns 1; it cannot be written. |
| 3 | MOF | Monitor ADC Power-Off Control. 0 = Automatic power control. 1 = Override automatic control and force monitor ADC circuitry off. |
| 2 | Reserved | Read returns zero. |
| 1 | BIASOF | DC Bias Power-Off Control. 0 = Automatic power control. 1 = Override automatic control and force dc bias circuitry off. |
| 0 | SLICOF | SLIC Power-Off Control. 0 = Automatic power control. 1 = Override automatic control and force SLIC circuitry off. |

Si3210/Si3211

Register 15. Powerdown Control 2

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|------|-------|------|-------|-----|------|
| Name | | | ADCM | ADCON | DACM | DACON | GMM | GMON |
| Type | | | R/W | R/W | R/W | R/W | R/W | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7:6 | Reserved | Read returns zero. |
| 5 | ADCM | Analog to Digital Converter Manual/Automatic Power Control. 0 = Automatic power control. 1 = Manual power control; ADCON controls on/off state. |
| 4 | ADCON | Analog to Digital Converter On/Off Power Control. When ADCM = 1: 0 = Analog to digital converter powered off. 1 = Analog to digital converter powered on. ADCON has no effect when ADCM = 0. |
| 3 | DACM | Digital to Analog Converter Manual/Automatic Power Control. 0 = Automatic power control. 1 = Manual power control; DACON controls on/off state. |
| 2 | DACON | Digital to Analog Converter On/Off Power Control. When DACM = 1: 0 = Digital to analog converter powered off. 1 = Digital to analog converter powered on. DACON has no effect when DACM = 0. |
| 1 | GMM | Transconductance Amplifier Manual/Automatic Power Control. 0 = Automatic power control. 1 = Manual power control; GMON controls on/off state. |
| 0 | GMON | Transconductance Amplifier On/Off Power Control. When GMM = 1: 0 = Analog to digital converter powered off. 1 = Analog to digital converter powered on. GMON has no effect when GMM = 0. |

Register 18. Interrupt Status 1

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------|------|------|------|------|------|------|------|
| Name | PMIP | PMAP | RGIP | RGAP | O2IP | O2AP | O1IP | O1AP |
| Type | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------|---|
| 7 | PMIP | Pulse Metering Inactive Timer Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 6 | PMAP | Pulse Metering Active Timer Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 5 | RGIP | Ringing Inactive Timer Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 4 | RGAP | Ringing Active Timer Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 3 | O2IP | Oscillator 2 Inactive Timer Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 2 | O2AP | Oscillator 2 Active Timer Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 1 | O1IP | Oscillator 1 Inactive Timer Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 0 | O1AP | Oscillator 1 Active Timer Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |

Si3210/Si3211

Register 19. Interrupt Status 2

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------|------|------|------|------|------|------|------|
| Name | Q6AP | Q5AP | Q4AP | Q3AP | Q2AP | Q1AP | LCIP | RTIP |
| Type | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------|---|
| 7 | Q6AP | Power Alarm Q6 Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 6 | Q5AP | Power Alarm Q5 Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 5 | Q4AP | Power Alarm Q4 Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 4 | Q3AP | Power Alarm Q3 Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 3 | Q2AP | Power Alarm Q2 Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 2 | Q1AP | Power Alarm Q1 Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 1 | LCIP | Loop Closure Transition Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 0 | RTIP | Ring Trip Interrupt Pending. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |

Register 20. Interrupt Status 3

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|----|----|------|------|-------|
| Name | | | | | | CMCP | INDP | DTMFP |
| Type | | | | | | R/W | R/W | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7:3 | Reserved | Read returns zero. |
| 2 | CMCP | Common Mode Calibration Error Interrupt. This bit is set when off-hook/on-hook status changes during the common mode balance calibration. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 1 | INDP | Indirect Register Access Serviced Interrupt. This bit is set once a pending indirect register service request has been completed. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |
| 0 | DTMFP | DTMF Tone Detected Interrupt. Writing 1 to this bit clears a pending interrupt. 0 = No interrupt pending. 1 = Interrupt pending. |

Si3210/Si3211

Register 21. Interrupt Enable 1

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------|------|------|------|------|------|------|------|
| Name | PMIE | PMAE | RGIE | RGAE | O2IE | O2AE | O1IE | O1AE |
| Type | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------|---|
| 7 | PMIE | Pulse Metering Inactive Timer Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 6 | PMAE | Pulse Metering Active Timer Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 5 | RGIE | Ringing Inactive Timer Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 4 | RGAE | Ringing Active Timer Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 3 | O2IE | Oscillator 2 Inactive Timer Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 2 | O2AE | Oscillator 2 Active Timer Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 1 | O1IE | Oscillator 1 Inactive Timer Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 0 | O1AE | Oscillator 1 Active Timer Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |

Register 22. Interrupt Enable 2

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------|------|------|------|------|------|------|------|
| Name | Q6AE | Q5AE | Q4AE | Q3AE | Q2AE | Q1AE | LCIE | RTIE |
| Type | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------|---|
| 7 | Q6AE | Power Alarm Q6 Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 6 | Q5AE | Power Alarm Q5 Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 5 | Q4AE | Power Alarm Q4 Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 4 | Q3AE | Power Alarm Q3 Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 3 | Q2AE | Power Alarm Q2 Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 2 | Q1AE | Power Alarm Q1 Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 1 | LCIE | Loop Closure Transition Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 0 | RTIE | Ring Trip Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |

Si3210/Si3211

Register 23. Interrupt Enable 3

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|----|----|------|------|-------|
| Name | | | | | | CMCE | INDE | DTMFE |
| Type | | | | | | R/W | R/W | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7:3 | Reserved | Read returns zero. |
| 2 | CMCE | Common Mode Calibration Error Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 1 | INDE | Indirect Register Access Serviced Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |
| 0 | DTMFE | DTMF Tone Detected Interrupt Enable. 0 = Interrupt masked. 1 = Interrupt enabled. |

Register 24. DTMF Decode Status

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|-----|----------|----|----|----|
| Name | | | | VAL | DIG[3:0] | | | |
| Type | R | | | | R | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7:5 | Reserved | Read returns zero. |
| 4 | VAL | DTMF Valid Digit Decoded. 0 = Not currently detecting digit. 1 = Currently detecting digit. |
| 3:0 | DIG[3:0] | DTMF Digit. 0001 = "1" 0010 = "2" 0011 = "3" 0100 = "4" 0101 = "5" 0110 = "6" 0111 = "7" 1000 = "8" 1001 = "9" 1010 = "0" 1011 = "*" 1100 = "#" 1101 = "A" 1110 = "B" 1111 = "C" 0000 = "D" |

Si3210/Si3211

Register 28. Indirect Data Access—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | IDA[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7:0 | IDA[7:0] | Indirect Data Access—Low Byte. A write to IDA followed by a write to IAA will place the contents of IDA into an indirect register at the location referenced by IAA at the next indirect register update (16 kHz update rate—a write operation). Writing IAA only will load IDA with the value stored at IAA at the next indirect memory update (a read operation). |

Register 29. Indirect Data Access—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | IDA[15:8] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|--|
| 7:0 | IDA[15:8] | Indirect Data Access—High Byte. A write to IDA followed by a write to IAA will place the contents of IDA into an indirect register at the location referenced by IAA at the next indirect register update (16 kHz update rate—a write operation). Writing IAA only will load IDA with the value stored at IAA at the next indirect memory update (a read operation). |

Register 30. Indirect Address

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | IAA[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = xxxx_xxxx

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | IAA[7:0] | <p>Indirect Address Access.</p> <p>A write to IDA followed by a write to IAA will place the contents of IDA into an indirect register at the location referenced by IAA at the next indirect register update (16 kHz update rate—a write operation). Writing IAA only will load IDA with the value stored at IAA at the next indirect memory update (a read operation).</p> |

Register 31. Indirect Address Status

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|----|----|----|----|-----|
| Name | | | | | | | | IAS |
| Type | R | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7:1 | Reserved | Read returns zero. |
| 0 | IAS | <p>Indirect Access Status.</p> <p>0 = No indirect memory access pending. 1 = Indirect memory access pending.</p> |

Si3210/Si3211

Register 32. Oscillator 1 Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------|-----|-----|-------|-------|-----|-----------|----|
| Name | OSS1 | REL | OZ1 | O1TAE | O1TIE | O1E | O1SO[1:0] | |
| Type | R | R/W | R/W | R/W | R/W | R/W | R/W | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|---|
| 7 | OSS1 | Oscillator 1 Signal Status. 0 = Output signal inactive. 1 = Output signal active. |
| 6 | REL | Oscillator 1 Automatic Register Reload. This bit should be set for FSK signaling. 0 = Oscillator 1 will stop signaling after inactive timer expires. 1 = Oscillator 1 will continue to read register parameters and output signals. |
| 5 | OZ1 | Oscillator 1 Zero Cross Enable. 0 = Signal terminates after active timer expires. 1 = Signal terminates at zero crossing after active timer expires. |
| 4 | O1TAE | Oscillator 1 Active Timer Enable. 0 = Disable timer. 1 = Enable timer. |
| 3 | O1TIE | Oscillator 1 Inactive Timer Enable. 0 = Disable timer. 1 = Enable timer. |
| 2 | O1E | Oscillator 1 Enable. 0 = Disable oscillator. 1 = Enable oscillator. |
| 1:0 | O1SO[1:0] | Oscillator 1 Signal Output Routing. 00 = Unassigned path (output not connected). 01 = Assign to transmit path. 10 = Assign to receive path. 11 = Assign to both paths. |

Register 33. Oscillator 2 Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------|----|-----|-------|-------|-----|-----------|----|
| Name | OSS2 | | OZ2 | O2TAE | O2TIE | O2E | O2SO[1:0] | |
| Type | R | | R/W | R/W | R/W | R/W | R/W | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|--|
| 7 | OSS2 | Oscillator 2 Signal Status. 0 = Output signal inactive. 1 = Output signal active. |
| 6 | Reserved | Read returns zero. |
| 5 | OZ2 | Oscillator 2 Zero Cross Enable. 0 = Signal terminates after active timer expires. 1 = Signal terminates at zero crossing. |
| 4 | O2TAE | Oscillator 2 Active Timer Enable. 0 = Disable timer. 1 = Enable timer. |
| 3 | O2TIE | Oscillator 2 Inactive Timer Enable. 0 = Disable timer. 1 = Enable timer. |
| 2 | O2E | Oscillator 2 Enable. 0 = Disable oscillator. 1 = Enable oscillator. |
| 1:0 | O2SO[1:0] | Oscillator 2 Signal Output Routing. 00 = Unassigned path (output not connected) 01 = Assign to transmit path. 10 = Assign to receive path. 11 = Assign to both paths. |

Si3210/Si3211

Register 34. Ringing Oscillator Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|----|------|------|------|-----|-----|------|
| Name | RSS | | RDAC | RTAE | RTIE | ROE | RVO | TSWS |
| Type | R | | R | R/W | R/W | R | R/W | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7 | RSS | Ringling Signal Status. 0 = Ringing oscillator output signal inactive. 1 = Ringing oscillator output signal active. |
| 6 | Reserved | Read returns zero. |
| 5 | RDAC | Ringling Signal DAC/Linefeed Cross Indicator. For ringing signal start and stop, output to TIP and RING is suspended to ensure continuity with dc linefeed voltages. RDAC indicates that ringing signal is actually present at TIP and RING. 0 = Ringing signal not present at TIP and RING. 1 = Ringing signal present at TIP and RING. |
| 4 | RTAE | Ringling Active Timer Enable. 0 = Disable timer. 1 = Enable timer. |
| 3 | RTIE | Ringling Inactive Timer Enable. 0 = Disable timer. 1 = Enable timer. |
| 2 | ROE | Ringling Oscillator Enable. 0 = Ringing oscillator disabled. 1 = Ringing oscillator enabled. |
| 1 | RVO | Ringling Voltage Offset. 0 = No dc offset added to ringing signal. 1 = DC offset added to ringing signal. |
| 0 | TSWS | Trapezoid/Sinusoid Waveshape Select. 0 = Sinusoid 1 = Trapezoid |

Register 35. Pulse Metering Oscillator Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-------|----|----|------|------|------|----|----|
| Name | PSTAT | | | PMAE | PMIE | PMOE | | |
| Type | R | | | R/W | R/W | R/W | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7 | PSTAT | Pulse Metering Signal Status. 0 = Output signal inactive. 1 = Output signal active. |
| 6:5 | Reserved | Read returns zero. |
| 4 | PMAE | Pulse Metering Active Timer Enable. 0 = Disable timer. 1 = Enable timer. |
| 3 | PMIE | Pulse Metering Inactive Timer Enable. 0 = Disable timer. 1 = Enable timer. |
| 2 | PMOE | Pulse Metering Oscillator Enable. 0 = Disable oscillator. 1 = Enable oscillator. |
| 1:0 | Reserved | Read returns zero. |

Register 36. Oscillator 1 Active Timer—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | OAT1[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|--|
| 7:0 | OAT1[7:0] | Oscillator 1 Active Timer. LSB = 125 μ s |

Si3210/Si3211

Register 37. Oscillator 1 Active Timer—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------------|----|----|----|----|----|----|----|
| Name | OAT1[15:8] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------------|----------------------------|
| 7:0 | OAT1[15:8] | Oscillator 1 Active Timer. |

Register 38. Oscillator 1 Inactive Timer—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | OIT1[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|---|
| 7:0 | OIT1[7:0] | Oscillator 1 Inactive Timer. LSB = 125 μ s |

Register 39. Oscillator 1 Inactive Timer—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------------|----|----|----|----|----|----|----|
| Name | OIT1[15:8] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------------|------------------------------|
| 7:0 | OIT1[15:8] | Oscillator 1 Inactive Timer. |

Register 40. Oscillator 2 Active Timer—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | OAT2[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|--|
| 7:0 | OAT2[7:0] | Oscillator 2 Active Timer. LSB = 125 μ s |

Register 41. Oscillator 2 Active Timer—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------------|----|----|----|----|----|----|----|
| Name | OAT2[15:8] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------------|-----------------------------------|
| 7:0 | OAT2[15:8] | Oscillator 2 Active Timer. |

Register 42. Oscillator 2 Inactive Timer—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | OIT2[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|--|
| 7:0 | OIT2[7:0] | Oscillator 2 Inactive Timer. LSB = 125 μ s |

Si3210/Si3211

Register 43. Oscillator 2 Inactive Timer—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------------|----|----|----|----|----|----|----|
| Name | OIT2[15:8] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------------|------------------------------|
| 7:0 | OIT2[15:8] | Oscillator 2 Inactive Timer. |

Register 44. Pulse Metering Oscillator Active Timer—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | PAT[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7:0 | PAT[7:0] | Pulse Metering Active Timer. LSB = 125 μ s |

Register 45. Pulse Metering Oscillator Active Timer—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | PAT[15:8] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|------------------------------|
| 7:0 | PAT[15:8] | Pulse Metering Active Timer. |

Register 46. Pulse Metering Oscillator Inactive Timer—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | PIT[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | PIT[7:0] | Pulse Metering Inactive Timer. LSB = 125 μ s |

Register 47. Pulse Metering Oscillator Inactive Timer—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | PIT[15:8] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|---------------------------------------|
| 7:0 | PIT[15:8] | Pulse Metering Inactive Timer. |

Register 48. Ringing Oscillator Active Timer—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | RAT[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7:0 | RAT[7:0] | Ringing Active Timer. LSB = 125 μ s |

Si3210/Si3211

Register 49. Ringing Oscillator Active Timer—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | RAT[15:8] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|-----------------------|
| 7:0 | RAT[15:8] | Ringing Active Timer. |

Register 50. Ringing Oscillator Inactive Timer—Low Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | RIT[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | RIT[7:0] | Ringing Inactive Timer. LSB = 125 μ s |

Register 51. Ringing Oscillator Inactive Timer—High Byte

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | RIT[15:8] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|-------------------------|
| 7:0 | RIT[15:8] | Ringing Inactive Timer. |

Register 52. FSK Data

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|----|----|----|----|--------|
| Name | | | | | | | | FSKDAT |
| Type | | | | | | | | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7:1 | Reserved | Read returns zero. |
| 0 | FSKDAT | FSK Data. When FSKEN = 1 (direct Register 108, bit 6) and REL = 1 (direct Register 32, bit 6), this bit serves as the buffered input for FSK generation bit stream data. |

Register 63. Loop Closure Debounce Interval

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | LCD[7:0] | | | | | | | |
| Type | | | | | | | | |

Reset settings = 0011_0010 (revision C); 0101_0100 (subsequent revisions)

| Bit | Name | Function |
|-----|----------|---|
| 7:0 | LCD[7:0] | Loop Closure Debounce Interval for Automatic Ringing. This register sets the loop closure debounce interval for the ringing silent period when using automatic ringing cadences. The value may be set between 0 ms (0x00) and 159 ms (0x7F) in 1.25 ms steps. |

Si3210/Si3211

Register 64. Linefeed Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----------|----|----|-----|---------|----|----|
| Name | | LFS[2:0] | | | | LF[2:0] | | |
| Type | R | | | | R/W | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|---|
| 7 | Reserved | Read returns zero. |
| 6:4 | LFS[2:0] | <p>Linefeed Shadow. This register reflects the actual real-time linefeed state. Automatic operations may cause actual linefeed state to deviate from the state defined by linefeed register (e.g., when linefeed equals ringing state, LFS will equal on-hook transmission state during ringing silent period and ringing state during ring burst).</p> <p>000 = Open 001 = Forward active 010 = Forward on-hook transmission 011 = TIP open 100 = Ringing 101 = Reverse active 110 = Reverse on-hook transmission 111 = RING open</p> |
| 3 | Reserved | Read returns zero. |
| 2:0 | LF[2:0] | <p>Linefeed. Writing to this register sets the linefeed state.</p> <p>000 = Open 001 = Forward active 010 = Forward on-hook transmission 011 = TIP open 100 = Ringing 101 = Reverse active 110 = Reverse on-hook transmission 111 = RING open</p> |

Register 65. External Bipolar Transistor Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|-----|-----|------|-----------|----|-----------|----|
| Name | | SQH | CBY | ETBE | ETBO[1:0] | | ETBA[1:0] | |
| Type | | R/W | R/W | R/W | R/W | | R/W | |

Reset settings = 0110_0001

| Bit | Name | Function |
|-----|-----------|--|
| 7 | Reserved | Read returns zero. |
| 6 | SQH | Audio Squelch. 0 = No squelch. 1 = STIPAC and SRINGAC pins squelched. |
| 5 | CBY | Capacitor Bypass. 0 = Capacitors CP (C1) and CM (C2) in circuit. 1 = Capacitors CP (C1) and CM (C2) bypassed. |
| 4 | ETBE | External Transistor Bias Enable. 0 = Bias disabled. 1 = Bias enabled. |
| 3:2 | ETBO[1:0] | External Transistor Bias Levels—On-Hook Transmission State. DC bias current which flows through external BJTs in the on-hook transmission state. Increasing this value increases the compliance of the ac longitudinal balance circuit. 00 = 4 mA 01 = 8 mA 10 = 12 mA 11 = Reserved |
| 1:0 | ETBA[1:0] | External Transistor Bias Levels—Active Off-Hook State. DC bias current which flows through external BJTs in the active off-hook state. Increasing this value increases the compliance of the ac longitudinal balance circuit. 00 = 4 mA 01 = 8 mA 10 = 12 mA 11 = Reserved |

Si3210/Si3211

Register 66. Battery Feed Control

| Si3210 | | | | | | | | |
|--------|----|----|----|-----|-------|----|----|-------|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | | | | VOV | FVBAT | | | TRACK |
| Type | | | | R/W | R/W | | | R/W |

Reset settings = 0000_0011

| Si3211 | | | | | | | | |
|--------|----|----|----|----|----|----|-------|----|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | | | | | | | BATSL | |
| Type | | | | | | | R/W | |

Reset settings = 0000_0110

| Bit | Name | Function |
|-----|----------|---|
| 7:5 | Reserved | Read returns zero. |
| 4 | VOV | Overhead Voltage Range Increase. (Si3210 only; See Figure 19 on page 38.) This bit selects the programmable range for V_{OV} , which is defined in indirect Register 41. 0 = V_{OV} = 0 V to 9 V 1 = V_{OV} = 0 V to 13.5 V Si3211 = Reserved. |
| 3 | FVBAT | V_{BAT} Manual Setting (Si3210 only). 0 = Normal operation 1 = V_{BAT} tracks V_{BATH} register. Si3211 = Read returns 0; it cannot be written. |
| 2 | Reserved | Si3210 = Read returns zero. Si3211 = Read returns one. |
| 1 | BATSL | Battery Feed Select (Si3211 only). This bit selects between high and low battery supplies. 0 = Low battery selected (DCSW pin low). 1 = High battery selected (DCSW pin high). Si3210 = Read returns zero. |
| 0 | TRACK | DC-DC Converter Tracking Mode (Si3210 only). 0 = $ V_{BAT} $ will not decrease below V_{BATL} . 1 = V_{BAT} tracks V_{RING} . Si3211 = Reserved. |

Register 67. Automatic/Manual Control

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|------|-------|------|------|------|------|------|
| Name | | MNCM | MNDIF | SPDS | ABAT | AORD | AOLD | AOPN |
| Type | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Reset settings = 0001_1111

| Bit | Name | Function |
|-----|----------|--|
| 7 | Reserved | Read returns zero. |
| 6 | MNCM | Common Mode Manual/Automatic Select. 0 = Automatic control. 1 = Manual control, in which TIP (forward) or RING (reverse) forces voltage to follow VCM value. |
| 5 | MNDIF | Differential Mode Manual/Automatic Select. 0 = Automatic control. 1 = Manual control (forces differential voltage to follow VOC value). |
| 4 | SPDS | Speed-Up Mode Enable. 0 = Speed-up disabled. 1 = Automatic speed-up. |
| 3 | ABAT | Battery Feed Automatic/Manual Select (Si3211 only). 0 = Automatic mode disabled. 1 = Automatic mode enabled (automatic switching to low battery in off-hook state). |
| 2 | AORD | Automatic/Manual Ring Trip Detect. 0 = Manual mode. 1 = Enter off-hook active state automatically upon ring trip detect. |
| 1 | AOLD | Automatic/Manual Loop Closure Detect. 0 = Manual mode. 1 = Enter off-hook active state automatically upon loop closure detect. |
| 0 | AOPN | Power Alarm Automatic/Manual Detect. 0 = Manual mode. 1 = Enter open state automatically upon power alarm. |

Si3210/Si3211

Register 68. Loop Closure/Ring Trip Detect Status

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|----|----|--------|-----|-----|
| Name | | | | | | DBIRAW | RTP | LCR |
| Type | | | | | | R | R | R |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7:3 | Reserved | Read returns zero. |
| 2 | DBIRAW | Ring Trip/Loop Closure Unfiltered Output. State of this bit reflects the real-time output of ring trip and loop closure detect circuits before debouncing. 0 = Ring trip/loop closure threshold exceeded. 1 = Ring trip/loop closure threshold not exceeded. |
| 1 | RTP | Ring Trip Detect Indicator (Filtered Output). 0 = Ring trip detect has not occurred. 1 = Ring trip detect occurred. |
| 0 | LCR | Loop Closure Detect Indicator (Filtered Output). 0 = Loop closure detect has not occurred. 1 = Loop closure detect has occurred. |

Register 69. Loop Closure Debounce Interval

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|-----------|----|----|----|----|----|----|
| Name | | LCDI[6:0] | | | | | | |
| Type | | R/W | | | | | | |

Reset settings = 0000_1010

| Bit | Name | Function |
|-----|-----------|---|
| 7 | Reserved | Read returns zero. |
| 6:0 | LCDI[6:0] | Loop Closure Debounce Interval. The value written to this register defines the minimum steady state debounce time. Value may be set between 0 ms (0x00) to 159 ms (0x7F) in 1.25 ms steps. Default value = 12.5 ms. |

Register 70. Ring Trip Detect Debounce Interval

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | RTDI[6:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_1010

| Bit | Name | Function |
|-----|-----------|---|
| 7 | Reserved | Read returns zero. |
| 6:0 | RTDI[6:0] | Ring Trip Detect Debounce Interval. The value written to this register defines the minimum steady state debounce time. The value may be set between 0 ms (0x00) to 159 ms (0x7F) in 1.25 ms steps. Default value = 12.5 ms. |

Register 71. Loop Current Limit

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | ILIM[2:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|--|
| 7:3 | Reserved | Read returns zero. |
| 2:0 | ILIM[2:0] | Loop Current Limit. The value written to this register sets the constant loop current. The value may be set between 20 mA (0x00) and 41 mA (0x07) in 3 mA steps. |

Si3210/Si3211

Register 72. On-Hook Line Voltage

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|------|----------|-----|----|----|----|----|
| Name | | VSGN | VOC[5:0] | | | | | |
| Type | R/W | | | R/W | | | | |

Reset settings = 0010_0000

| Bit | Name | Function |
|-----|----------|--|
| 7 | Reserved | Read returns zero. |
| 6 | VSGN | On-Hook Line Voltage. The value written to this bit sets the on-hook line voltage polarity ($V_{TIP}-V_{RING}$). 0 = $V_{TIP}-V_{RING}$ is positive 1 = $V_{TIP}-V_{RING}$ is negative |
| 5:0 | VOC[5:0] | On-Hook Line Voltage. The value written to this register sets the on-hook line voltage ($V_{TIP}-V_{RING}$). Value may be set between 0 V (0x00) and 94.5 V (0x3F) in 1.5 V steps. Default value = 48 V. |

Register 73. Common Mode Voltage

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|----|----------|----|----|----|----|----|
| Name | | | VCM[5:0] | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0010

| Bit | Name | Function |
|-----|----------|---|
| 7:6 | Reserved | Read returns zero. |
| 5:0 | VCM[5:0] | Common Mode Voltage. The value written to this register sets V_{TIP} for forward active and forward on-hook transmission states and V_{RING} for reverse active and reverse on-hook transmission states. The value may be set between 0 V (0x00) and -94.5 V (0x3F) in 1.5 V steps. Default value = -3 V. |

Register 74. High Battery Voltage

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-------------|------------|----|----|----|----|----|----|----|
| Name | VBATH[5:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0011_0010

| Bit | Name | Function |
|-----|------------|---|
| 7:6 | Reserved | Read returns zero. |
| 5:0 | VBATH[5:0] | High Battery Voltage. The value written to this register sets high battery voltage. V_{BATH} must be greater than or equal to V_{BATL} . The value may be set between 0 V (0x00) and -94.5 V (0x3F) in 1.5 V steps. Default value = -75 V. For Si3211, V_{BATL} must be set equal to the voltage supplied at the V_{BATL} node shown in the Si3211 typical application circuit drawings, Figure 12 on page 22 and Figure 14 on page 26. |

Register 75. Low Battery Voltage

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-------------|------------|----|----|----|----|----|----|----|
| Name | VBATL[5:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0001_0000

| Bit | Name | Function |
|-----|------------|---|
| 7:6 | Reserved | Read returns zero. |
| 5:0 | VBATL[5:0] | Low Battery Voltage. The value written to this register sets low battery voltage. V_{BATH} must be greater than or equal to V_{BATL} . The value may be set between 0 V (0x00) and -94.5 V (0x3F) in 1.5 V steps. Default value = -24 V. For Si3211, V_{BATL} must be set equal to the voltage supplied at the V_{BATL} node shown in the Si3211 typical application circuit drawings, Figure 12 on page 22 and Figure 14 on page 26. |

Si3210/Si3211

Register 76. Power Monitor Pointer

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------------|----|----|----|----|----|----|----|
| Name | PWRMP[2:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------------|---|
| 7:3 | Reserved | Read returns zero. |
| 2:0 | PWRMP[2:0] | Power Monitor Pointer. Selects the external transistor from which to read power output. The power of the selected transistor is read in the PWRMP register. 000 = Q1 001 = Q2 010 = Q3 011 = Q4 100 = Q5 101 = Q6 110 = Undefined 111 = Undefined |

Register 77. Line Power Output Monitor

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------------|----|----|----|----|----|----|----|
| Name | PWROM[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------------|--|
| 7:0 | PWROM[7:0] | Line Power Output Monitor. This register reports the real-time power output of the transistor selected using PWRMP. The range is 0 W (0x00) to 7.8 W (0xFF) in 30.4 mW steps for Q1, Q2, Q5, and Q6. The range is 0 W (0x00) to 0.9 W (0xFF) in 3.62 mW steps for Q3 and Q4. |

Register 78. Loop Voltage Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|------|----------|----|----|----|----|----|
| Name | | LVSP | LVS[5:0] | | | | | |
| Type | | R | R | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7 | Reserved | Read returns zero. |
| 6 | LVSP | Loop Voltage Sense Polarity. This register reports the polarity of the differential loop voltage ($V_{TIP} - V_{RING}$). 0 = Positive loop voltage ($V_{TIP} > V_{RING}$). 1 = Negative loop voltage ($V_{TIP} < V_{RING}$). |
| 5:0 | LVS[5:0] | Loop Voltage Sense Magnitude. This register reports the magnitude of the differential loop voltage ($V_{TIP} - V_{RING}$). The range is 0 V to 94.5 V in 1.5 V steps. |

Register 79. Loop Current Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|------|----------|----|----|----|----|----|
| Name | | LCSP | LCS[5:0] | | | | | |
| Type | | R | R | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|--|
| 7 | Reserved | Read returns zero. |
| 6 | LCSP | Loop Current Sense Polarity. This register reports the polarity of the loop current. 0 = Positive loop current (forward direction). 1 = Negative loop current (reverse direction). |
| 5:0 | LCS[5:0] | Loop Current Sense Magnitude. This register reports the magnitude of the loop current. The range is 0 mA to 78.75 mA in 1.25 mA steps. |

Si3210/Si3211

Register 80. TIP Voltage Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----------|----|----|----|----|----|----|----|
| Name | VTIP[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|---|
| 7:0 | VTIP[7:0] | TIP Voltage Sense. This register reports the real-time voltage at TIP with respect to ground. The range is 0 V (0x00) to -95.88 V (0xFF) in .376 V steps. |

Register 81. RING Voltage Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------------|----|----|----|----|----|----|----|
| Name | VRING[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------------|---|
| 7:0 | VRING[7:0] | RING Voltage Sense. This register reports the real-time voltage at RING with respect to ground. The range is 0 V (0x00) to -95.88 V (0xFF) in .376 V steps. |

Register 82. Battery Voltage Sense 1

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-------------|----|----|----|----|----|----|----|
| Name | VBATS1[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-------------|--|
| 7:0 | VBATS1[7:0] | Battery Voltage Sense 1. This register is one of two registers that reports the real-time voltage at V_{BAT} with respect to ground. The range is 0 V (0x00) to -95.88 V (0xFF) in .376 V steps. |

Register 83. Battery Voltage Sense 2

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-------------|----|----|----|----|----|----|----|
| Name | VBATS2[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-------------|--|
| 7:0 | VBATS2[7:0] | Battery Voltage Sense 2. This register is one of two registers that reports the real-time voltage at V_{BAT} with respect to ground. The range is 0 V (0x00) to -95.88 V (0xFF) in .376 V steps. |

Register 84. Transistor 1 Current Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | IQ1[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = xxxx_xxxx

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | IQ1[7:0] | Transistor 1 Current Sense. This register reports the real-time current through Q1. The range is 0 A (0x00) to 81.35 mA (0xFF) in .319 mA steps. If ETBE = 1, the reported value does not include the additional ETBO/A current. |

Register 85. Transistor 2 Current Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | IQ2[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = xxxx_xxxx

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | IQ2[7:0] | Transistor 2 Current Sense. This register reports the real-time current through Q2. The range is 0 A (0x00) to 81.35 mA (0xFF) in .319 mA steps. If ETBE = 1, the reported value does not include the additional ETBO/A current. |

Si3210/Si3211

Register 86. Transistor 3 Current Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | IQ3[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = xxxx_xxxx

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | IQ3[7:0] | Transistor 3 Current Sense. This register reports the real-time current through Q3. The range is 0 A (0x00) to 9.59 mA (0xFF) in 37.6 μ A steps. |

Register 87. Transistor 4 Current Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | IQ4[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = xxxx_xxxx

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | IQ4[7:0] | Transistor 4 Current Sense. This register reports the real-time current through Q4. The range is 0 A (0x00) to 9.59 mA (0xFF) in 37.6 μ A steps. |

Register 88. Transistor 5 Current Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | IQ5[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = xxxx_xxxx

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | IQ5[7:0] | Transistor 5 Current Sense. This register reports the real-time current through Q5. The range is 0 A (0x00) to 80.58 mA (0xFF) in .316 mA steps. |

Register 89. Transistor 6 Current Sense

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----------|----|----|----|----|----|----|----|
| Name | IQ6[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = xxxx_xxxx

| Bit | Name | Function |
|-----|----------|--|
| 7:0 | IQ6[7:0] | Transistor 6 Current Sense. This register reports the real-time current through Q6. The range is 0 A (0x00) to 80.58 mA (0xFF) in .316 mA steps. |

Register 92. DC-DC Converter PWM Period

| Si3210 | | | | | | | | |
|--------|--------|----|----------|----|----|----|----|----|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | DCN[7] | 1 | DCN[5:0] | | | | | |
| Type | R/W | R | R/W | | | | | |

Reset settings = 1111_1111

| Si3211 | | | | | | | | |
|--------|----|----|----|----|----|----|----|----|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | | | | | | | | |
| Type | | | | | | | | |

Reset settings = xxxx_xxxx

| Bit | Name | Function |
|-----|----------|---|
| 7:0 | DCN[7:0] | DC-DC Converter Period. This bit sets the PWM period for the dc-dc converter. The range is 3.906 μ s (0x40) to 15.564 μ s (0xFF) in 61.035 ns steps. Si3211 = Reserved. Bit 6 is fixed to one and read-only, so there are two ranges of operation: 3.906 μ s–7.751 μ s, used for MOSFET transistor switching. 11.719 μ s–15.564 μ s, used for BJT transistor switching. |

Si3210/Si3211

Register 93. DC-DC Converter Switching Delay

| Si3210 | | | | | | | | |
|--------|-------|----|-------|------------|----|----|----|----|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | DCCAL | | DCPOL | DCTOF[4:0] | | | | |
| Type | R/W | | R | R/W | | | | |

Reset settings = 0001_0100 (Si3210)

Reset settings = 0011_0100 (Si3210M)

| Si3211 | | | | | | | | |
|--------|----|----|----|----|----|----|----|----|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | | | | | | | | |
| Type | | | | | | | | |

Reset settings = xxxx_xxxx

| Bit | Name | Function |
|-----|------------|---|
| 7 | DCCAL | DC-DC Converter Peak Current Monitor Calibration Status (Si3210 only). Writing a one to this bit starts the dc-dc converter peak current monitor calibration routine. 0 = Normal operation. 1 = Calibration being performed. Si3211 = Reserved. |
| 6 | Reserved | Read returns zero. |
| 5 | DCPOL | DC-DC Converter Feed Forward Pin (DCFF) Polarity (Si3210 only). This read-only register bit indicates the polarity relationship of the DCFF pin to the DCDRV pin. Two versions of the Si3210 are offered to support the two relationships. 0 = DCFF pin polarity is opposite of DCDRV pin (Si3210). 1 = DCFF pin polarity is same as DCDRV pin (Si3210M). Si3211 = Reserved. |
| 4:0 | DCTOF[4:0] | DC-DC Converter Minimum Off Time (Si3210 only). This register sets the minimum off time for the pulse width modulated dc-dc converter control. $T_{OFF} = (DCTOF + 4) \cdot 61.035 \text{ ns}$. Si3211 = Reserved. |

Register 94. DC-DC Converter PWM Pulse Width

| Si3210 | | | | | | | | |
|--------|-----------|----|----|----|----|----|----|----|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | DCPW[7:0] | | | | | | | |
| Type | R | | | | | | | |

Reset settings = 0000_0000

| Si3211 | | | | | | | | |
|--------|----|----|----|----|----|----|----|----|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | | | | | | | | |
| Type | | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|-----------|---|
| 7:0 | DCPW[7:0] | DC-DC Converter Pulse Width (Si3210 only). Pulse width of DCDRV is given by $PW = (DCPW - DCTOF - 4) \cdot 61.035 \text{ ns}$. Si3211 = Reserved. |

Si3210/Si3211

Register 96. Calibration Control/Status Register 1

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|-----|-------|------|------|------|------|-------|
| Name | | CAL | CALSP | CALR | CALT | CALD | CALC | CALIL |
| Type | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Reset settings = 0001_1111

| Bit | Name | Function |
|-----|----------|---|
| 7 | Reserved | Read returns zero. |
| 6 | CAL | Calibration Control/Status Bit. Setting this bit begins calibration of the entire system. 0 = Normal operation or calibration complete. 1 = Calibration in progress. |
| 5 | CALSP | Calibration Speedup. Setting this bit shortens the time allotted for V_{BAT} settling at the beginning of the calibration cycle. 0 = 300 ms 1 = 30 ms |
| 4 | CALR | RING Gain Mismatch Calibration. For use with discrete solution only. When using the Si3201, consult “AN35: Si321x User’s Quick Reference Guide” and follow instructions for manual calibration. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |
| 3 | CALT | TIP Gain Mismatch Calibration. For use with discrete solution only. When using the Si3201, consult “AN35: Si321x User’s Quick Reference Guide” and follow instructions for manual calibration. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |
| 2 | CALD | Differential DAC Gain Calibration. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |
| 1 | CALC | Common Mode DAC Gain Calibration. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |
| 0 | CALIL | I_{LIM} Calibration. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |

Register 97. Calibration Control/Status Register 2

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|-------|-------|--------|--------|-------|
| Name | | | | CALM1 | CALM2 | CALDAC | CALADC | CALCM |
| Type | | | | R/W | R/W | R/W | R/W | R/W |

Reset settings = 0001_1111

| Bit | Name | Function |
|-----|----------|--|
| 7:5 | Reserved | Read returns zero. |
| 4 | CALM1 | Monitor ADC Calibration 1. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |
| 3 | CALM2 | Monitor ADC Calibration 2. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |
| 2 | CALDAC | DAC Calibration. Setting this bit begins calibration of the audio DAC offset. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |
| 1 | CALADC | ADC Calibration. Setting this bit begins calibration of the audio ADC offset. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |
| 0 | CALCM | Common Mode Balance Calibration. Setting this bit begins calibration of the ac longitudinal balance. 0 = Normal operation or calibration complete. 1 = Calibration enabled or in progress. |

Register 98. RING Gain Mismatch Calibration Result

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|----|----|-------------|----|----|
| Name | | | | | | CALGMR[4:0] | | |
| Type | | | | | | R/W | | |

Reset settings = 0001_0000

| Bit | Name | Function |
|-----|-------------|--|
| 7:5 | Reserved | Read returns zero. |
| 4:0 | CALGMR[4:0] | Gain Mismatch of IE Tracking Loop for RING Current. |

Si3210/Si3211

Register 99. TIP Gain Mismatch Calibration Result

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|----|----|-------------|----|----|----|----|
| Name | | | | CALGMT[4:0] | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0001_0000

| Bit | Name | Function |
|-----|-------------|---|
| 7:5 | Reserved | Read returns zero. |
| 4:0 | CALGMT[4:0] | Gain Mismatch of IE Tracking Loop for TIP Current. |

Register 100. Differential Loop Current Gain Calibration Result

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|----|----|------------|----|----|----|----|
| Name | | | | CALGD[4:0] | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0001_0001

| Bit | Name | Function |
|-----|------------|--|
| 7:5 | Reserved | Read returns zero. |
| 4:0 | CALGD[4:0] | Differential DAC Gain Calibration Result. |

Register 101. Common Mode Loop Current Gain Calibration Result

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|----|----|------------|----|----|----|----|
| Name | | | | CALGC[4:0] | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0001_0001

| Bit | Name | Function |
|-----|------------|---|
| 7:5 | Reserved | Read returns zero. |
| 4:0 | CALGC[4:0] | Common Mode DAC Gain Calibration Result. |

Register 102. Current Limit Calibration Result

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-----|----|----|----|-------------|----|----|----|
| Name | | | | | CALGIL[3:0] | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_1000

| Bit | Name | Function |
|-----|-------------|--|
| 7:5 | Reserved | Read returns zero. |
| 3:0 | CALGIL[3:0] | Current Limit Calibration Result. |

Register 103. Monitor ADC Offset Calibration Result

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-------------|----|----|----|-------------|----|----|----|
| Name | CALMG1[3:0] | | | | CALMG2[3:0] | | | |
| Type | R/W | | | | R/W | | | |

Reset settings = 1000_1000

| Bit | Name | Function |
|-----|-------------|---|
| 7:4 | CALMG1[3:0] | Monitor ADC Offset Calibration Result 1. |
| 3:0 | CALMG2[3:0] | Monitor ADC Offset Calibration Result 2. |

Register 104. Analog DAC/ADC Offset

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|----|----|----|----|------|------|------|------|
| Name | | | | | DACP | DACN | ADCP | ADCN |
| Type | | | | | R/W | R/W | R/W | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|----------|------------------------------------|
| 7:4 | Reserved | Read returns zero. |
| 3 | DACP | Positive Analog DAC Offset. |
| 2 | DACN | Negative Analog DAC Offset. |
| 1 | ADCP | Positive Analog ADC Offset. |
| 0 | ADCN | Negative Analog ADC Offset. |

Si3210/Si3211

Register 105. DAC Offset Calibration Result

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------------|----|----|----|----|----|----|----|
| Name | DACOF[7:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|------------|---------------------------------------|
| 7:0 | DACOF[7:0] | DAC Offset Calibration Result. |

Register 106. Common Mode Balance Calibration Result

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|------------|----|----|----|----|----|----|----|
| Name | CMBAL[5:0] | | | | | | | |
| Type | | | | | | | | |

Reset settings = 0010_0000

| Bit | Name | Function |
|-----|------------|--|
| 7:6 | Reserved | Read returns zero. |
| 5:0 | CMBAL[5:0] | Common Mode Balance Calibration Result. |

Register 107. DC Peak Current Monitor Calibration Result

| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------|-------------|----|----|----|----|----|----|----|
| Name | CMDCPK[3:0] | | | | | | | |
| Type | R/W | | | | | | | |

Reset settings = 0000_1000

| Bit | Name | Function |
|-----|-------------|--|
| 7:4 | Reserved | Read returns zero. |
| 3:0 | CMDCPK[3:0] | DC Peak Current Monitor Calibration Result. |

Register 108. Enhancement Enable

Note: The Enhancement Enable register and associated features are available in silicon revisions C and later.

| Si3210 | | | | | | | | |
|--------|--------|-------|------|-------|----|------|-------|--------|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | ILIMEN | FSKEN | DCSU | ZSEXT | | LCVE | DCFIL | HYSTEN |
| Type | R/W | R/W | R/W | R/W | | R/W | R/W | R/W |

Reset settings = 0000_0000

| Si3211 | | | | | | | | |
|--------|--------|-------|----|-------|------|------|----|--------|
| Bit | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Name | ILIMEN | FSKEN | | ZSEXT | SWDB | LCVE | | HYSTEN |
| Type | R/W | R/W | | R/W | R/W | R/W | | R/W |

Reset settings = 0000_0000

| Bit | Name | Function |
|-----|--------|--|
| 7 | ILIMEN | <p>Current Limit Increase.</p> <p>When enabled, this bit temporarily increases the maximum differential current limit at the end of a ring burst to enable a faster settling time to a dc linefeed state.</p> <p>0 = The value programmed in ILIM (direct Register 71) is used.</p> <p>1 = The maximum differential loop current limit is temporarily increased to 41 mA.</p> |
| 6 | FSKEN | <p>FSK Generation Enhancement.</p> <p>When enabled, this bit will increase the clocking rate of tone generator 1 to 24 kHz only when the REL bit (direct Register 32, bit 6) is set. Also, dedicated oscillator registers are used for FSK generation (indirect registers 99–104). Audio tones are generated using this new higher frequency, and oscillator 1 active and inactive timers have a finer bit resolution of 41.67 μs. This provides greater resolution during FSK caller ID signal generation.</p> <p>0 = Tone generator always clocked at 8 kHz; OSC1, OSC1X., and OSC1Y are always used.</p> <p>1 = Tone generator module clocked at 24 kHz and dedicated FSK registers used only when REL = 1; otherwise clocked at 8 kHz.</p> |
| 5 | DCSU | <p>DC-DC Converter Control Speedup (Si3210 only).</p> <p>When enabled, this bit invokes a multi-threshold error control algorithm which allows the dc-dc converter to adjust more quickly to voltage changes.</p> <p>0 = Normal control algorithm used.</p> <p>1 = Multi-threshold error control algorithm used.</p> |

Si3210/Si3211

| Bit | Name | Function |
|-----|--------|---|
| 4 | ZSEXT | Impedance Internal Reference Resistor Disable. When enabled, this bit removes the internal reference resistor used to synthesize ac impedances for 600 + 2.1 μ F and 900 + 2.16 μ F so that an external resistor reference may be used. 0 = Internal resistor used to generate 600 + 2.1 μ F and 900 + 2.16 μ F impedances. 1 = Internal resistor removed from circuit. |
| 3 | SWDB | Battery Switch Debounce (Si3211 only). When enabled, this bit allows debouncing of the battery switching circuit only when transitioning from V_{BATH} to V_{BATL} external battery supplies (EXTBAT = 1). 0 = No debounce used. 1 = 60 ms debounce period used. Si3210 = Reserved. |
| 2 | LCVE | Voltage-Based Loop Closure. Enables loop closure to be determined by the TIP-to-RING voltage rather than loop current. 0 = Loop closure determined by loop current. 1 = Loop closure determined by TIP-to-RING voltage. |
| 1 | DCFIL | DC-DC Converter Squelch (Si3210 only). When enabled, this bit squelches noise in the audio band from the dc-dc converter control loop. 0 = Voice band squelch disabled. 1 = Voice band squelch enabled. |
| 0 | HYSTEN | Loop Closure Hysteresis Enable. When enabled, this bit allows hysteresis to the loop closure calculation. The upper and lower hysteresis thresholds are defined by indirect registers 28 and 43, respectively. 0 = Loop closure hysteresis disabled. 1 = Loop closure hysteresis enabled. |

4. Indirect Registers

Indirect registers are not directly mapped into memory but are accessible through the IDA and IAA registers. A write to IDA followed by a write to IAA is interpreted as a write request to an indirect register. In this case, the contents of IDA are written to indirect memory at the location referenced by IAA at the next indirect register update. A write to IAA without first writing to IDA is interpreted as a read request from an indirect register. In this case, the value located at IAA is written to IDA at the next indirect register update. Indirect registers are updated at a rate of 16 kHz. For pending indirect register transfers, IAS (direct Register 31) will be one until serviced. In addition, an interrupt, IND (Register 20), can be generated upon completion of the indirect transfer.

4.1. DTMF Decoding

All values are represented in 2s-complement format.

Note: The values of all indirect registers are undefined following the reset state.

Table 37. DTMF Indirect Registers Summary

| Addr. | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-------|--------------|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|
| 0 | ROW0[15:0] | | | | | | | | | | | | | | | |
| 1 | ROW1[15:0] | | | | | | | | | | | | | | | |
| 2 | ROW2[15:0] | | | | | | | | | | | | | | | |
| 3 | ROW3[15:0] | | | | | | | | | | | | | | | |
| 4 | COL[15:0] | | | | | | | | | | | | | | | |
| 5 | FWDTW[15:0] | | | | | | | | | | | | | | | |
| 6 | REVTW[15:0] | | | | | | | | | | | | | | | |
| 7 | ROWREL[15:0] | | | | | | | | | | | | | | | |
| 8 | COLREL[15:0] | | | | | | | | | | | | | | | |
| 9 | ROW2[15:0] | | | | | | | | | | | | | | | |
| 10 | COL2[15:0] | | | | | | | | | | | | | | | |
| 11 | PWRMIN[15:0] | | | | | | | | | | | | | | | |
| 12 | HOTL[15:0] | | | | | | | | | | | | | | | |

Table 38. DTMF Indirect Registers Description

| Addr. | Description | Reference Page |
|-------|---|----------------|
| 0 | DTMF Row 0 Peak Magnitude Pass Ratio Threshold. This register sets the minimum power ratio threshold for row 0 DTMF detection. If the ratio of power in row 0 to total power in the row band is greater than ROW0, a row 0 signal is detected. A value of 0x7FF0 corresponds to a 1.0 ratio. | 47 |
| 1 | DTMF Row 1 Peak Magnitude Pass Ratio Threshold. This register sets the minimum power ratio threshold for row 1 DTMF detection. If the ratio of power in row 1 to total power in the row band is greater than ROW1, a row 1 signal is detected. A value of 0x7FF0 corresponds to a 1.0 ratio. | 47 |
| 2 | DTMF Row 2 Peak Magnitude Pass Ratio Threshold. This register sets the minimum power ratio threshold for row 2 DTMF detection. If the ratio of power in row 2 to total power in the row band is greater than ROW2, a row 2 signal is detected. A value of 0x7FF0 corresponds to a 1.0 ratio. | 47 |
| 3 | DTMF Row 3 Peak Magnitude Pass Ratio Threshold. This register sets the minimum power ratio threshold for row 3 DTMF detection. If the ratio of power in row 3 to total power in the row band is greater than ROW3, a row 3 signal is detected. A value of 0x7FF0 corresponds to a 1.0 ratio. | 47 |
| 4 | DTMF Column Peak Magnitude Pass Threshold. This register sets the minimum power ratio threshold for column DTMF detection; all columns use the same threshold. If the ratio of power in a particular column to total power in the column band is greater than COL, a column detect for that particular column signal is detected. A value of 0x7FF0 corresponds to a 1.0 ratio. | 47 |
| 5 | DTMF Forward Twist Threshold. This register sets the threshold for the power ratio of row power to column power. A value of 0x7F0 corresponds to a 1.0 ratio. | 47 |
| 6 | DTMF Reverse Twist Threshold. This register sets the threshold for the power ratio of column power to row power. A value of 0x7F0 corresponds to a 1.0 ratio. | 47 |
| 7 | DTMF Row Ratio Threshold. This register sets the threshold for the power ratio of highest power row to the other rows. A value of 0x7F0 corresponds to a 1.0 ratio. | 47 |
| 8 | DTMF Column Ratio Threshold. This register sets the threshold for the power ratio of highest power column to the other columns. A value of 0x7F0 corresponds to a 1.0 ratio. | 47 |
| 9 | DTMF Row Second Harmonic Threshold. This register sets the threshold for the power ratio of peak row tone to its second harmonic. A value of 0x7F0 corresponds to a 1.0 ratio. | 47 |
| 10 | DTMF Column Second Harmonic Threshold. This register sets the threshold for the power ratio of peak column tone to its second harmonic. A value of 0x7F0 corresponds to a 1.0 ratio. | 47 |
| 11 | DTMF Power Minimum Threshold. This register sets the threshold for the minimum total power in the DTMF calculation, under which the calculation is ignored. | 47 |
| 12 | DTMF Hot Limit Threshold. This register sets the two-step AGC in the DTMF path. | 47 |

4.2. Oscillators

See functional description sections of tone generation, ringing, and pulse metering for guidelines on computing register values. All values are represented in 2s-complement format.

Note: The values of all indirect registers are undefined following the reset state. Shaded areas denote bits that can be read and written but should be written to zeroes.

Table 39. Oscillator Indirect Registers Summary

| Addr. | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | |
|-------|-------------|-----------|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|--|
| 13 | OSC1[15:0] | | | | | | | | | | | | | | | | |
| 14 | OSC1X[15:0] | | | | | | | | | | | | | | | | |
| 15 | OSC1Y[15:0] | | | | | | | | | | | | | | | | |
| 16 | OSC2[15:0] | | | | | | | | | | | | | | | | |
| 17 | OSC2X[15:0] | | | | | | | | | | | | | | | | |
| 18 | OSC2Y[15:0] | | | | | | | | | | | | | | | | |
| 19 | | ROFF[5:0] | | | | | | | | | | | | | | | |
| 20 | RCO[15:0] | | | | | | | | | | | | | | | | |
| 21 | RNGX[15:0] | | | | | | | | | | | | | | | | |
| 22 | RNGY[15:0] | | | | | | | | | | | | | | | | |
| 23 | PLSD[15:0] | | | | | | | | | | | | | | | | |
| 24 | PLSX[15:0] | | | | | | | | | | | | | | | | |
| 25 | PLSCO[15:0] | | | | | | | | | | | | | | | | |

Table 40. Oscillator Indirect Registers Description

| Addr. | Description | Reference Page |
|-------|--|----------------|
| 13 | Oscillator 1 Frequency Coefficient. Sets tone generator 1 frequency. | 40 |
| 14 | Oscillator 1 Amplitude Register. Sets tone generator 1 signal amplitude. | 40 |
| 15 | Oscillator 1 Initial Phase Register. Sets initial phase of tone generator 1 signal. | 40 |
| 16 | Oscillator 2 Frequency Coefficient. Sets tone generator 2 frequency. | 40 |
| 17 | Oscillator 2 Amplitude Register. Sets tone generator 2 signal amplitude. | 40 |
| 18 | Oscillator 2 Initial Phase Register. Sets initial phase of tone generator 2 signal. | 40 |
| 19 | Ringling Oscillator DC Offset. Sets dc offset component ($V_{TIP}-V_{RING}$) to ringling waveform. The range is 0 to 94.5 V in 1.5 V increments. | 42 |
| 20 | Ringling Oscillator Frequency Coefficient. Sets ringling generator frequency. | 42 |
| 21 | Ringling Oscillator Amplitude Register. Sets ringling generator signal amplitude. | 42 |
| 22 | Ringling Oscillator Initial Phase Register. Sets initial phase of ringling generator signal. | 42 |
| 23 | Pulse Metering Oscillator Attack/Decay Ramp Rate. Sets pulse metering attack/decay ramp rate. | 46 |
| 24 | Pulse Metering Oscillator Amplitude Register. Sets pulse metering generator signal amplitude. | 46 |
| 25 | Pulse Metering Oscillator Frequency Coefficient. Sets pulse metering generator frequency. | 46 |

4.3. Digital Programmable Gain/Attenuation

See functional description sections of digital programmable gain/attenuation for guidelines on computing register values. All values are represented in 2s-complement format.

Note: The values of all indirect registers are undefined following the reset state. Shaded areas denote bits that can be read and written but should be written to zeroes.

Table 41. Digital Programmable Gain/Attenuation Indirect Registers Summary

| Addr. | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-------|------------|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|
| 26 | DACG[11:0] | | | | | | | | | | | | | | | |
| 27 | ADCG[11:0] | | | | | | | | | | | | | | | |

Table 42. Digital Programmable Gain/Attenuation Indirect Registers Description

| Addr. | Description | Reference Page |
|-------|---|----------------|
| 26 | <p>Receive Path Digital to Analog Converter Gain/Attenuation.</p> <p>This register sets gain/attenuation for the receive path. The digitized signal is effectively multiplied by DACG to achieve gain/attenuation. A value of 0x00 corresponds to $-\infty$ dB gain (mute). A value of 0x400 corresponds to unity gain. A value of 0x7FF corresponds to a gain of 6 dB.</p> | 48 |
| 27 | <p>Transmit Path Analog to Digital Converter Gain/Attenuation.</p> <p>This register sets gain/attenuation for the transmit path. The digitized signal is effectively multiplied by ADCG to achieve gain/attenuation. A value of 0x00 corresponds to $-\infty$ dB gain (mute). A value of 0x400 corresponds to unity gain. A value of 0x7FF corresponds to a gain of 6 dB.</p> | 48 |

Si3210/Si3211

4.4. SLIC Control

See descriptions of linefeed interface and power monitoring for guidelines on computing register values. All values are represented in 2s-complement format.

Note: The values of all indirect registers are undefined following the reset state. Shaded areas denote bits that can be read and written but should be written to zeroes.

Table 43. SLIC Control Indirect Registers Summary

| Addr. | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
|-------|-----|-----|-----|-------------|-----|-----|----|----|----|----|----|----|----|----|----|----|--|--|
| 28 | | | | LCRT[5:0] | | | | | | | | | | | | | | |
| 29 | | | | RPTP[5:0] | | | | | | | | | | | | | | |
| 30 | | | | CML[5:0] | | | | | | | | | | | | | | |
| 31 | | | | CMH[5:0] | | | | | | | | | | | | | | |
| 32 | | | | PPT12[7:0] | | | | | | | | | | | | | | |
| 33 | | | | PPT34[7:0] | | | | | | | | | | | | | | |
| 34 | | | | PPT56[7:0] | | | | | | | | | | | | | | |
| 35 | | | | NCLR[12:0] | | | | | | | | | | | | | | |
| 36 | | | | NRTP[12:0] | | | | | | | | | | | | | | |
| 37 | | | | NQ12[12:0] | | | | | | | | | | | | | | |
| 38 | | | | NQ34[12:0] | | | | | | | | | | | | | | |
| 39 | | | | NQ56[12:0] | | | | | | | | | | | | | | |
| 40 | | | | VCMR[3:0] | | | | | | | | | | | | | | |
| 41 | | | | VMIND[3:0]* | | | | | | | | | | | | | | |
| 42 | | | | | | | | | | | | | | | | | | |
| 43 | | | | LCRTL[5:0] | | | | | | | | | | | | | | |

***Note:** Si3210 only.

Table 44. SLIC Control Indirect Registers Description

| Addr. | Description | Reference Page |
|-------|--|----------------|
| 28 | Loop Closure Threshold. Loop closure detection threshold. This register defines the upper bounds threshold if hysteresis is enabled (direct Register 108, bit 0). The range is 0–80 mA in 1.27 mA steps. | 35 |
| 29 | Ring Trip Threshold. Ring trip detection threshold during ringing. | 45 |
| 30 | Common Mode Minimum Threshold for Speed-Up. This register defines the negative common mode voltage threshold. Exceeding this threshold enables a wider bandwidth of dc linefeed control for faster settling times. The range is 0–23.625 V in 0.375 V steps. | |
| 31 | Common Mode Maximum Threshold for Speed-Up. This register defines the positive common mode voltage threshold. Exceeding this threshold enables a wider bandwidth of dc linefeed control for faster settling times. The range is 0–23.625 V in 0.375 V steps. | |
| 32 | Power Alarm Threshold for Transistors Q1 and Q2. | 33 |
| 33 | Power Alarm Threshold for Transistors Q3 and Q4. | 33 |
| 34 | Power Alarm Threshold for Transistors Q5 and Q6. | 33 |
| 35 | Loop Closure Filter Coefficient. | 35 |
| 36 | Ring Trip Filter Coefficient. | 45 |
| 37 | Thermal Low Pass Filter Pole for Transistors Q1 and Q2. | 33 |
| 38 | Thermal Low Pass Filter Pole for Transistors Q3 and Q4. | 33 |
| 39 | Thermal Low Pass Filter Pole for Transistors Q5 and Q6. | 33 |
| 40 | Common Mode Bias Adjust During Ringing. Recommended value of 0 decimal. | 42 |
| 41 | DC-DC Converter V_{OV} Voltage (Si3210 only). This register sets the overhead voltage, V_{OV} , to be supplied by the dc-dc converter. When the VOV bit = 0 (direct Register 66, bit 4), V_{OV} should be set between 0 and 9 V (VMIND = 0 to 6h). When the VOV bit = 1, V_{OV} should be set between 0 and 13.5 V (VMIND = 0 to 9h). | 36 |
| 42 | Reserved. | |
| 43 | Loop Closure Threshold—Lower Bound. This register defines the lower threshold for loop closure hysteresis, which is enabled in bit 0 of direct Register 108. The range is 0–80 mA in 1.27 mA steps. | 35 |

4.5. FSK Control

For detailed instructions on FSK signal generation, refer to “Application Note 32: FSK Generation” (AN32). These registers support enhanced FSK generation mode, which is enabled by setting FSKEN = 1 (direct Register 108, bit 6) and REL = 1 (direct Register 32, bit 6).


Table 45. FSK Control Indirect Registers Summary

| Addr. | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-------|-------------|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|
| 99 | FSK0X[15:0] | | | | | | | | | | | | | | | |
| 100 | FSK0[15:0] | | | | | | | | | | | | | | | |
| 101 | FSK1X[15:0] | | | | | | | | | | | | | | | |
| 102 | FSK1[15:0] | | | | | | | | | | | | | | | |
| 103 | FSK01[15:0] | | | | | | | | | | | | | | | |
| 104 | FSK10[15:0] | | | | | | | | | | | | | | | |

Table 46. FSK Control Indirect Registers Description

| Addr. | Description | Reference Page |
|-------|---|----------------|
| 99 | FSK Amplitude Coefficient for Space. When FSKEN = 1 and REL = 1, this register sets the amplitude to be used when generating a space or “0”. When the active timer (OAT1) expires, the value of this register is loaded into oscillator 1 instead of OSC1X. | 42 and AN32 |
| 100 | FSK Frequency Coefficient for Space. When FSKEN = 1 and REL = 1, this register sets the frequency to be used when generating a space or “0”. When the active timer (OAT1) expires, the value of this register is loaded into oscillator 1 instead of OSC1. | 42 and AN32 |
| 101 | FSK Amplitude Coefficient for Mark. When FSKEN = 1 and REL = 1, this register sets the amplitude to be used when generating a mark or “1”. When the active timer (OAT1) expires, the value of this register is loaded into oscillator 1 instead of OSC1X. | 42 and AN32 |
| 102 | FSK Frequency Coefficient for Mark. When FSKEN = 1 and REL = 1, this register sets the frequency to be used when generating a mark or “1”. When the active timer (OAT1) expires, the value of this register is loaded into oscillator 1 instead of OSC1. | 42 and AN32 |
| 103 | FSK Transition Parameter from 0 to 1. When FSKEN = 1 and REL = 1, this register defines a gain correction factor that is applied to signal amplitude when transitioning from a space (0) to a mark (1). | 42 and AN32 |
| 104 | FSK Transition Parameter from 1 to 0. When FSKEN = 1 and REL = 1, this register defines a gain correction factor that is applied to signal amplitude when transitioning from a mark (1) to a space (0). | 42 and AN32 |

5. Pin Descriptions: Si3210/11

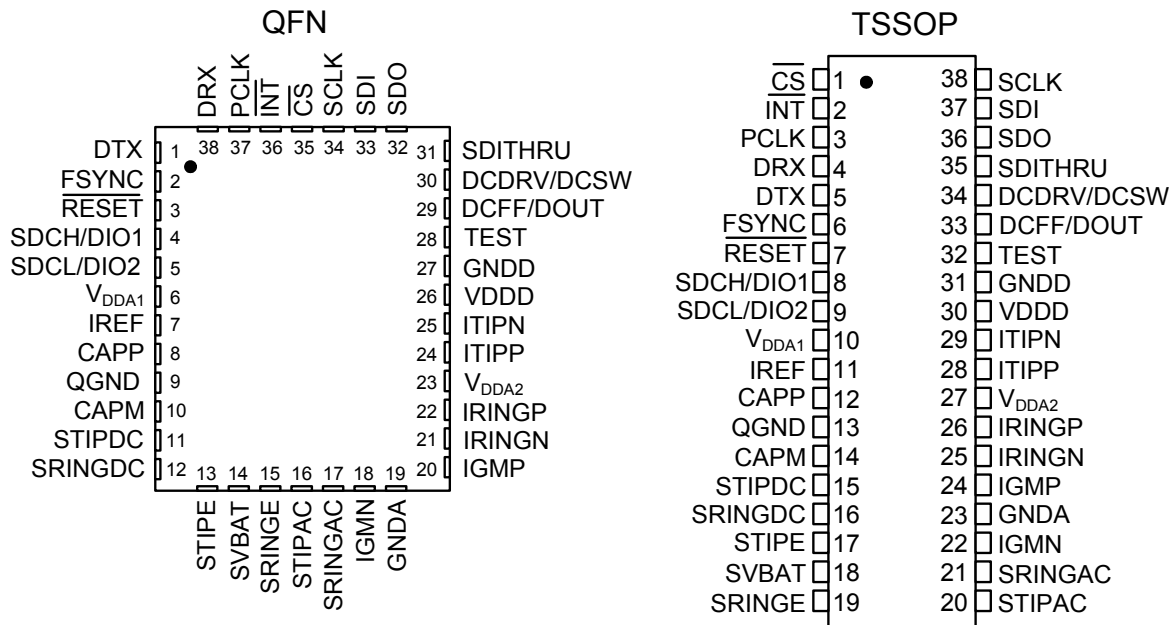

| QFN Pin # | TSSOP Pin # | Name | Description |
|-----------|-------------|---------------------------|--|
| 35 | 1 | $\overline{\text{CS}}$ | Chip Select. Active low. When inactive, SCLK and SDI are ignored and SDO is high impedance. When active, the serial port is operational. |
| 36 | 2 | $\overline{\text{INT}}$ | Interrupt. Maskable interrupt output. Open drain output for wire-ORed operation. |
| 37 | 3 | PCLK | PCM Bus Clock. Clock input for PCM bus timing. |
| 38 | 4 | DRX | Receive PCM Data. Input data from PCM bus. |
| 1 | 5 | DTX | Transmit PCM Data. Output data to PCM bus. |
| 2 | 6 | FSYNC | Frame Synch. 8 kHz frame synchronization signal for the PCM bus. May be short or long pulse format. |
| 3 | 7 | $\overline{\text{RESET}}$ | Reset. Active low input. Hardware reset used to place all control registers in the default state. |
| 4 | 8 | SDCH/DIO1 | DC Monitor/General Purpose I/O. DC-DC converter monitor input used to detect overcurrent situations in the converter (Si3210 only). General purpose I/O (Si3211 only). |


Si3210/Si3211

| QFN Pin # | TSSOP Pin # | Name | Description |
|-----------|-------------|-----------|--|
| 5 | 9 | SDCL/DIO2 | DC Monitor/General Purpose I/O. DC-DC converter monitor input used to detect overcurrent situations in the converter (Si3210 only). General purpose I/O (Si3211 only). |
| 6 | 10 | VDDA1 | Analog Supply Voltage. Analog power supply for internal analog circuitry. |
| 7 | 11 | IREF | Current Reference. Connects to an external resistor used to provide a high accuracy reference current. |
| 8 | 12 | CAPP | SLIC Stabilization Capacitor. Capacitor used in low pass filter to stabilize SLIC feedback loops. |
| 9 | 13 | QGND | Component Reference Ground. |
| 10 | 14 | CAPM | SLIC Stabilization Capacitor. Capacitor used in low pass filter to stabilize SLIC feedback loops. |
| 11 | 15 | STIPDC | TIP Sense. Analog current input used to sense voltage on the TIP lead. |
| 12 | 16 | SRINGDC | RING Sense. Analog current input used to sense voltage on the RING lead. |
| 13 | 17 | STIPE | TIP Emitter Sense. Analog current input used to sense voltage on the Q6 emitter lead. |
| 14 | 18 | SVBAT | V_{BAT} Sense. Analog current input used to sense voltage on dc-dc converter output voltage lead. |
| 15 | 19 | SRINGE | RING Emitter Sense. Analog current input used to sense voltage on the Q5 emitter lead. |
| 16 | 20 | STIPAC | TIP Transmit Input. Analog ac input used to detect voltage on the TIP lead. |
| 17 | 21 | SRINGAC | RING Transmit Input. Analog ac input used to detect voltage on the RING lead. |
| 18 | 22 | IGMN | Transconductance Amplifier External Resistor. Negative connection for transconductance gain setting resistor. |
| 19 | 23 | GNDA | Analog Ground. Ground connection for internal analog circuitry. |
| 20 | 24 | IGMP | Transconductance Amplifier External Resistor. Positive connection for transconductance gain setting resistor. |
| 21 | 25 | IRINGN | Negative Ring Current Control. Analog current output driving Q3. |
| 22 | 26 | IRINGP | Positive Ring Current Control. Analog current output driving Q2. |

| QFN Pin # | TSSOP Pin # | Name | Description |
|-----------|-------------|------------|---|
| 23 | 27 | VDDA2 | Analog Supply Voltage. Analog power supply for internal analog circuitry. |
| 24 | 28 | ITIPP | Positive TIP Current Control. Analog current output driving Q1. |
| 25 | 29 | ITIPN | Negative TIP Current Control. Analog current output driving Q4. |
| 26 | 30 | VDDD | Digital Supply Voltage. Digital power supply for internal digital circuitry. |
| 27 | 31 | GNDD | Digital Ground. Ground connection for internal digital circuitry. |
| 28 | 32 | TEST | Test. Enables test modes for Silicon Labs internal testing. This pin should always be tied to ground for normal operation. |
| 29 | 33 | DCFF/DOUT | DC Feed-Forward/High Current General Purpose Output. Feed-forward drive of external bipolar transistors to improve dc-dc converter efficiency (Si3210 only). High current output pin (Si3211 only). |
| 30 | 34 | DCDRV/DCSW | DC Drive/Battery Switch. DC-DC converter control signal output which drives external bipolar transistor (Si3210 only). Battery switch control signal output which drives external bipolar transistor (Si3211 only). |
| 31 | 35 | SDITHRU | SDI Passthrough. Cascaded SDI output signal for daisy-chain mode. |
| 32 | 36 | SDO | Serial Port Data Out. Serial port control data output. |
| 33 | 37 | SDI | Serial Port Data In. Serial port control data input. |
| 34 | 38 | SCLK | Serial Port Bit Clock Input. Serial port clock input. Controls the serial data on SDO and latches the data on SDI. |

Si3210/Si3211

6. Pin Descriptions: Si3201

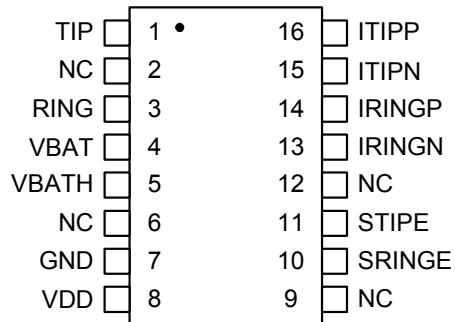

| Pin # | Name | Input/Output | Description |
|-------------------------|--------|--------------|---|
| 1 | TIP | I/O | TIP Output —Connect to the TIP lead of the subscriber loop. |
| 2, 6, 9, 12 | NC | — | No Internal Connection —Do not connect to any electrical signal. |
| 3 | RING | I/O | RING Output —Connect to the RING lead of the subscriber loop. |
| 4 | VBAT | — | Operating Battery Voltage —Connect to the battery supply. |
| 5 | VBATH | — | High Battery Voltage —This pin is internally connected to VBAT. |
| 7 | GND | — | Ground —Connect to a low impedance ground plane. |
| 8 | VDD | — | Supply Voltage —Main power supply for all internal circuitry. Connect to a 3.3 V or 5 V supply. Decouple locally with a 0.1 μ F/6 V capacitor. |
| 10 | SRINGE | O | RING Emitter Sense Output —Connect to the SRINGE pin of the Si321x pin. |
| 11 | STIPE | O | TIP Emitter Sense Output —Connect to the STIPE pin of the Si321x pin. |
| 13 | IRINGN | I | Negative RING Current Control —Connect to the IRINGN lead of the Si321x. |
| 14 | IRINGP | I | Positive RING Current Drive —Connect to the IRINGP lead of the Si321x. |
| 15 | ITIPN | I | Negative TIP Current Control —Connect to the ITIPN lead of the Si321x. |
| 16 | ITIPP | I | Positive TIP Current Control —Connect to the ITIPP lead of the Si321x. |
| Bottom-Side Exposed Pad | | — | Exposed Thermal Pad —Connect to the bulk ground plane. |

7. Ordering Guide

| Chip | Description | DC-DC Converter | DTMF Decoder | DCFF Pin Output | Package | Lead-Free and RoHS-Compliant | Temperature |
|--------------|--------------------|-----------------|--------------|---------------------------|----------|------------------------------|--------------|
| Si3210-X-FM | ProSLIC | ✓ | ✓ | $\overline{\text{DCDRV}}$ | QFN-38 | Yes | 0 to 70 °C |
| Si3210-X-GM | ProSLIC | ✓ | ✓ | $\overline{\text{DCDRV}}$ | QFN-38 | Yes | -40 to 85 °C |
| Si3210M-X-FM | ProSLIC | ✓ | ✓ | DCDRV | QFN-38 | Yes | 0 to 70 °C |
| Si3210M-X-GM | ProSLIC | ✓ | ✓ | DCDRV | QFN-38 | Yes | -40 to 85 °C |
| Si3210-KT | ProSLIC | ✓ | ✓ | $\overline{\text{DCDRV}}$ | TSSOP-38 | No | 0 to 70 °C |
| Si3210-BT | ProSLIC | ✓ | ✓ | $\overline{\text{DCDRV}}$ | TSSOP-38 | No | -40 to 85 °C |
| Si3210-FT | ProSLIC | ✓ | ✓ | $\overline{\text{DCDRV}}$ | TSSOP-38 | Yes | 0 to 70 °C |
| Si3210-GT | ProSLIC | ✓ | ✓ | $\overline{\text{DCDRV}}$ | TSSOP-38 | Yes | -40 to 85 °C |
| Si3210M-KT | ProSLIC | ✓ | ✓ | DCDRV | TSSOP-38 | No | 0 to 70 °C |
| Si3210M-BT | ProSLIC | ✓ | ✓ | DCDRV | TSSOP-38 | No | -40 to 85 °C |
| Si3210M-FT | ProSLIC | ✓ | ✓ | DCDRV | TSSOP-38 | Yes | 0 to 70 °C |
| Si3210M-GT | ProSLIC | ✓ | ✓ | DCDRV | TSSOP-38 | Yes | -40 to 85 °C |
| Si3211-KT | ProSLIC | | ✓ | n/a | TSSOP-38 | No | 0 to 70 °C |
| Si3211-BT | ProSLIC | | ✓ | n/a | TSSOP-38 | No | -40 to 85 °C |
| Si3211-X-FM | ProSLIC | | ✓ | n/a | QFN-38 | Yes | 0 to 70 °C |
| Si3211-X-GM | ProSLIC | | ✓ | n/a | QFN-38 | Yes | -40 to 85 °C |
| Si3201-KS | Linefeed Interface | | | n/a | SOIC-16 | No | 0 to 70 °C |
| Si3201-BS | Linefeed Interface | | | n/a | SOIC-16 | No | -40 to 85 °C |
| Si3201-FS | Linefeed Interface | | | n/a | SOIC-16 | Yes | 0 to 70 °C |
| Si3201-GS | Linefeed Interface | | | n/a | SOIC-16 | Yes | -40 to 85 °C |

Notes:

1. "X" denotes product revision.
2. Add an "R" at the end of the device to denote tape and reel; 2500 quantity per reel.

Table 47. Evaluation Kit Ordering Guide

| Item | Supported ProSLIC | Description | Linefeed Interface |
|-----------------|--------------------------|---------------------------|---------------------------|
| Si3210PPQX-EVB | Si3210-QFN | Eval Board, Daughter Card | Discrete |
| Si3210PPQ1-EVB | Si3210-QFN | Eval Board, Daughter Card | Si3201 |
| Si3210PPTX-EVB | Si3210-TSSOP | Eval Board, Daughter Card | Discrete |
| Si3210PPT1-EVB | Si3210-TSSOP | Eval Board, Daughter Card | Si3201 |
| Si3210MPPTX-EVB | Si3210M-TSSOP | Eval Board, Daughter Card | Discrete |
| Si3210MPPT1-EVB | Si3210M-TSSOP | Eval Board, Daughter Card | Si3201 |
| Si3211PPTX-EVB | Si3211-TSSOP | Eval Board, Daughter Card | Discrete |

8. Package Outline: 38-Pin QFN

Figure 33 illustrates the package details for the Si321x. Table 48 lists the values for the dimensions shown in the illustration.

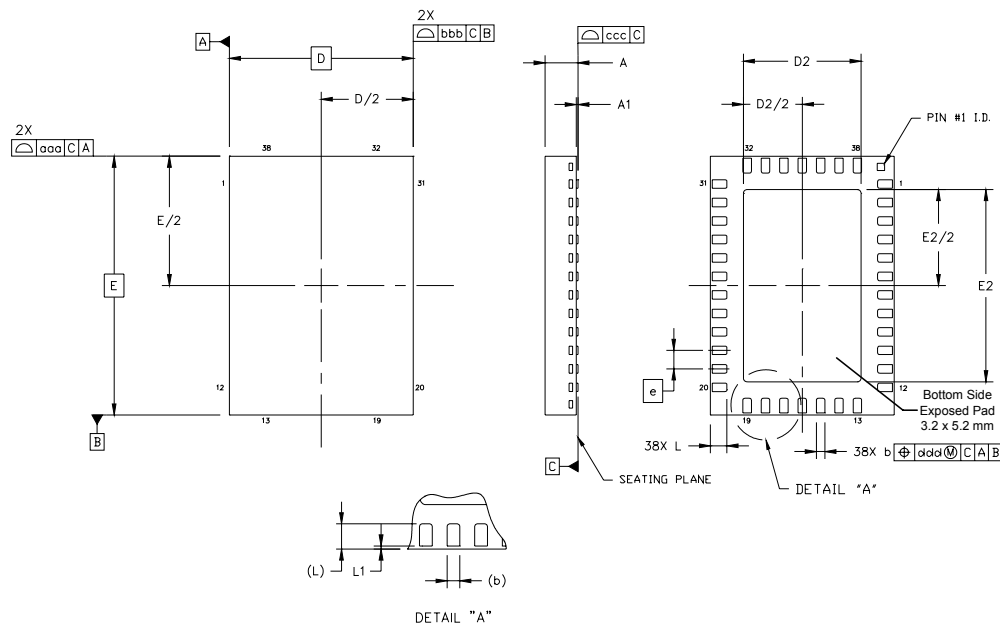


Figure 33. 38-Pin Quad Flat No-Lead Package (QFN)

Table 48. Package Diagram Dimensions^{1,2,3}

| Symbol | Millimeters | | |
|--------|-------------|------|------|
| | Min | Nom | Max |
| A | 0.75 | 0.85 | 0.95 |
| A1 | 0.00 | 0.01 | 0.05 |
| b | 0.18 | 0.23 | 0.30 |
| D | 5.00 BSC. | | |
| D2 | 3.10 | 3.20 | 3.30 |
| e | 0.50 BSC. | | |
| E | 7.00 BSC. | | |
| E2 | 5.10 | 5.20 | 5.30 |
| L | 0.35 | 0.45 | 0.55 |
| L1 | 0.03 | 0.05 | 0.08 |
| aaa | — | — | 0.10 |
| bbb | — | — | 0.10 |
| ccc | — | — | 0.08 |
| ddd | — | — | 0.10 |

Notes:

1. All dimensions shown are in millimeters (mm) unless otherwise noted.
2. Dimensioning and Tolerancing per ANSI Y14.5M-1982.
3. Recommended card reflow profile is per the JEDEC/IPC J-STD-020C specification for Small Body Components.

9. Package Outline: 38-Pin TSSOP

Figure 34 illustrates the package details for the Si321x. Table 49 lists the values for the dimensions shown in the illustration.

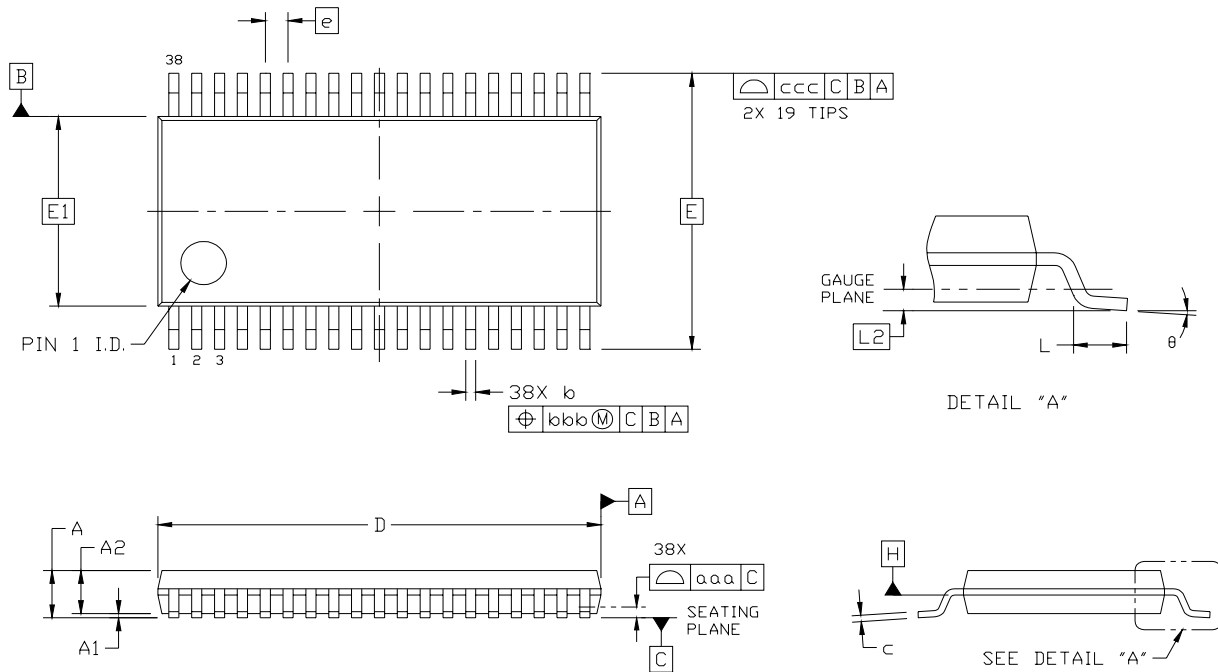


Figure 34. 38-Pin Thin Shrink Small Outline Package (TSSOP)

Table 49. Package Diagram Dimensions

| Symbol | Millimeters | | |
|--------|-------------|------|------|
| | Min | Nom | Max |
| A | — | — | 1.20 |
| A1 | 0.05 | — | 0.15 |
| A2 | 0.80 | 1.00 | 1.05 |
| b | 0.17 | — | 0.27 |
| c | 0.09 | — | 0.20 |
| D | 9.60 | 9.70 | 9.80 |
| E | 6.40 BSC | | |
| E1 | 4.30 | 4.40 | 4.50 |
| e | 0.50 BSC | | |
| L | 0.45 | 0.60 | 0.75 |
| L2 | 0.25 BSC | | |
| θ | 0° | — | 8° |
| aaa | 0.10 | | |
| bbb | 0.08 | | |
| ccc | 0.20 | | |

10. Package Outline: 16-Pin ESOIC

Figure 35 illustrates the package details for the Si3201. Table 50 lists the values for the dimensions shown in the illustration.

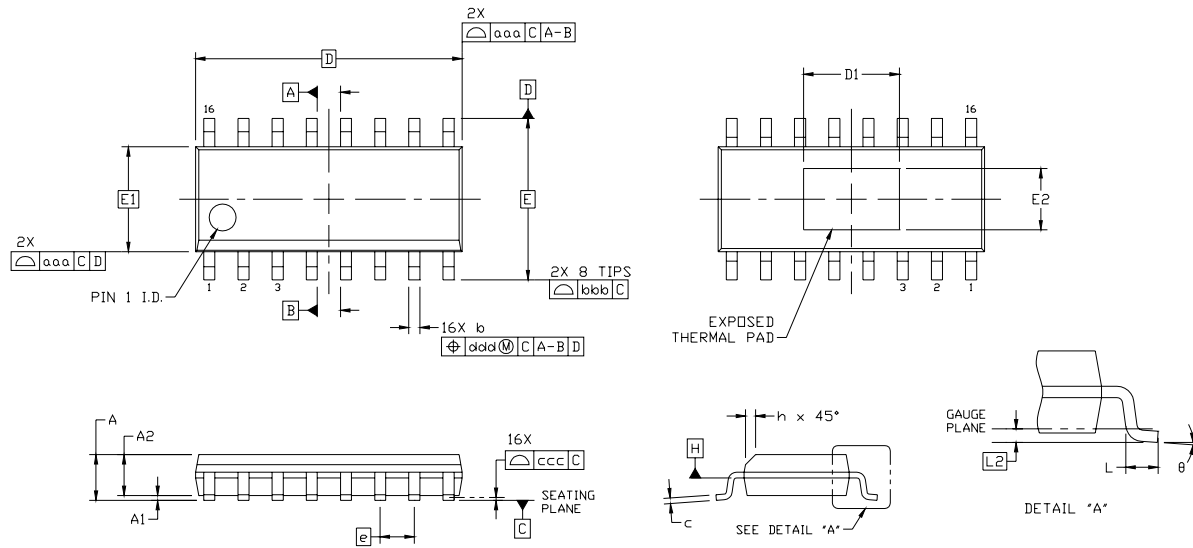


Figure 35. 16-Pin Thermal Enhanced Small Outline Integrated Circuit (ESOIC) Package

Table 50. Package Diagram Dimensions

| Symbol | Millimeters | |
|----------|-------------|------|
| | Min | Max |
| A | — | 1.75 |
| A1 | 0.00 | 0.15 |
| A2 | 1.25 | — |
| b | 0.31 | 0.51 |
| c | 0.17 | 0.25 |
| D | 9.90 BSC | |
| D1 | 3.45 | 3.65 |
| E | 6.00 BSC | |
| E1 | 3.90 BSC | |
| E2 | 2.20 | 2.40 |
| e | 1.27 BSC | |
| L | 0.40 | 1.27 |
| L2 | 0.25 BSC | |
| h | 0.25 | 0.50 |
| θ | 0° | 8° |
| aaa | 0.10 | |
| bbb | 0.20 | |
| ccc | 0.10 | |
| ddd | 0.25 | |

DOCUMENT CHANGE LIST

Revision 1.41 to Revision 1.42

- 16-pin ESOIC dimension A1 corrected in Table 49 on page 132.
- Delay time between chip selects, t_{CS} , changed from 220 ns to 440 ns in Table 10 on page 15.
- C10 changed from 22 nF to 0.1 μ F in Figure 10 on page 19.
- C18, C19 changed from 1.0 μ F to 4.7 μ F in Figure 12 on page 22.
- Recommended value for Indirect Register 40 changed from 6 to 0 in Table 44 on page 123.
- Added QFN package option.

Revision 1.42 to Revision 1.43

- Table 16, "Si3210/Si3210M External Component Values—Discrete Solution," on page 25.
 - Added TO-92 transistor suppliers to BOM.
- "7. Ordering Guide" on page 129
 - Updated to include product revision designator.
 - "Lead-Free" changed to "Lead-Free and RoHS-Compliant"
- Figure 9, "Si3210/Si3210M Application Circuit Using Si3201," on page 17.
 - Added additional decoupling components to VDDA1, VDDA2, and VDDD.
- Figure 12, "Si3211 Typical Application Circuit Using Si3201," on page 22.
 - Added additional decoupling components to VDDA1, VDDA2, and VDDD.
- Figure 13, "Si3210/Si3210M Typical Application Circuit Using Discrete Components," on page 24.
 - Added additional decoupling components to VDDA1, VDDA2, and VDDD.
 - Added optional components to STIPE, SRINGE, and SVBAT pins to improve idle channel noise.
- Figure 14, "Si3211 Typical Application Circuit Using Discrete Solution," on page 26.
 - Added additional decoupling components to VDDA1, VDDA2, and VDDD.
 - Added optional components to STIPE, SRINGE, and SVBAT pins to improve idle channel noise.
- Table 50, "Package Diagram Dimensions," on page 134
 - Changed A1 max dimension from 0.10 to 0.15.

Revision 1.43 to Revision 1.44

- Updated Figure 9.
 - Moved the schematic for the supply filtering network for VDDA1, VDDA2, and VDDD from the bottom of the diagram to the top.
 - Moved the symbol for C26 closer to the V_{BATH} pin on the Si3201 symbol.
 - Changed R26 to 10 k Ω .
 - Added Note 5.

- Updated Figure 12.
 - Moved the schematic for the supply filtering network for VDDA1, VDDA2, and VDDD from the bottom of the diagram to the top.
 - Moved the symbol for C9 closer to the V_{BATH} pin on the Si3201 symbol.
 - Changed R26 to 10 k Ω .
 - Added Note 4.
- Updated Figure 13.
 - Moved the schematic for the supply filtering network for VDDA1, VDDA2, and VDDD from the bottom of the diagram to the top.
 - Added Note 5 and moved the symbol for C26 to better illustrate its optimal position in a board layout.
 - Changed R26 to 10 k Ω .
 - Added Note 6.
- Updated Figure 14.
 - Moved the schematic for the supply filtering network for VDDA1, VDDA2, and VDDD from the bottom of the diagram to the top.
 - Added Note 3 and moved the symbol for C26 to better illustrate its optimal position in a board layout.
 - Added Note 4.
 - Changed R26 to 10 k Ω .
 - Corrected connection between D1 and the linefeed components.
 - Added Note 5
- Updated Table 3.
 - Corrected longitudinal current per pin for EBTO/EBTA = 10 to 12 mA.
- Updated Table 8.
 - Filled-in typical values for I_{VDD} and I_{BAT} for V_{DDD}, V_{VDDA} = 3.3 V.
- Updated Table 11.
 - Renamed "PCLK Period Jitter Tolerance" to "PCLK-to-FSYNC Jitter Tolerance".
 - Added Note 2.
- Updated Table 12.
 - Changed current rating of L2 to 150 mA.
 - Added new row for R26 and changed the value to 10 k Ω .
 - Added title for AN45 to description of R28 and R29.
 - Added column for component package type.
 - Added Note 1.
- Updated Table 13.
 - Added column for component package type.
- Updated Table 14.
 - Added column for component package type.
- Updated Table 15.
 - Changed current rating of L2 to 150 mA.
 - Added new row for R26 and changed the value to 10 k Ω .
 - Rearranged the rows for R8 through R32 to be in numerical order.
 - Added column for component package type.

- Added Note 1.
- Updated Table 16.
 - Changed current rating of L2 to 150 mA.
 - Corrected missing reference to R5.
 - Added new row for R26 and changed the value to 10 k Ω .
 - Added title for AN45 to description of R28 and R29.
 - Added column for component package type.
 - Added Note 1.
- Updated Table 17.
 - Added new row for R26 and changed the value to 10 k Ω .
 - Added column for component package type.
 - Added Note 1.
- Updated Table 18.
 - Added column for component package type.
- Updated Table 19.
 - Added column for component package type.
- Updated Table 36.
 - Added mnemonic for bit 7 of direct register 1 (PNI2).
 - Changed name of Register 94 to match the name in the description of Register 94.
- Updated Table 47.
 - Removed unsupported evaluation kit part numbers.
- Updated Register 1.
 - Added mnemonic and description of bit 7 (PNI2).
- Updated Register 75.
 - Clarified the description of V_{BATL} for Si3211.
- Updated "2.1.6. Loop Closure Transition Detection" on page 35.
 - Modified first and second paragraphs to indicate that a loop closure event signals a transition from on-hook to off-hook or from off-hook to on-hook.
- Updated "2.4.2. Sinusoidal Ringing" on page 43.
 - Modified second paragraph to indicate the minimum allowed peak TIP-to-RING ringing voltage depends on the linefeed state; i.e. forward-active or reverse-active.
- Updated "2.9. Clock Generation" on page 51.
 - Modified first paragraph to indicate that 768 kHz and 1.536 MHz are not valid rates for GCI mode.
- Updated "2.12. PCM Interface" on page 55.
 - Modified first paragraph to indicate that 768 kHz and 1.536 MHz are not valid rates for GCI mode.
- Updated "9. Package Outline: 38-Pin TSSOP" on page 132 with more detailed package drawing.
- Updated "10. Package Outline: 16-Pin ESOIC" on page 133 with more detailed package drawing.

NOTES:

CONTACT INFORMATION

Silicon Laboratories Inc.

400 West Cesar Chavez
Austin, TX 78701
Tel: 1+(512) 416-8500
Fax: 1+(512) 416-9669
Toll Free: 1+(877) 444-3032
Email: ProSLICinfo@silabs.com
Internet: www.silabs.com

The information in this document is believed to be accurate in all respects at the time of publication but is subject to change without notice. Silicon Laboratories assumes no responsibility for errors and omissions, and disclaims responsibility for any consequences resulting from the use of information included herein. Additionally, Silicon Laboratories assumes no responsibility for the functioning of undescribed features or parameters. Silicon Laboratories reserves the right to make changes without further notice. Silicon Laboratories makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Silicon Laboratories assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Silicon Laboratories products are not designed, intended, or authorized for use in applications intended to support or sustain life, or for any other application in which the failure of the Silicon Laboratories product could create a situation where personal injury or death may occur. Should Buyer purchase or use Silicon Laboratories products for any such unintended or unauthorized application, Buyer shall indemnify and hold Silicon Laboratories harmless against all claims and damages.

Silicon Laboratories, Silicon Labs, and ProSLIC are trademarks of Silicon Laboratories Inc.

Other products or brandnames mentioned herein are trademarks or registered trademarks of their respective holders.