

ADSP-BF561 EZ-KIT Lite[®] Evaluation System Manual

Revision 3.2, March 2008

Part Number
82-000811-01

Analog Devices, Inc.
One Technology Way
Norwood, Mass. 02062-9106



Copyright Information

©2008 Analog Devices, Inc., ALL RIGHTS RESERVED. This document may not be reproduced in any form without prior, express written consent from Analog Devices, Inc.

Printed in the USA.

Limited Warranty

The EZ-KIT Lite evaluation system is warranted against defects in materials and workmanship for a period of one year from the date of purchase from Analog Devices or from an authorized dealer.

Disclaimer

Analog Devices, Inc. reserves the right to change this product without prior notice. Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under the patent rights of Analog Devices, Inc.

Trademark and Service Mark Notice

The Analog Devices icon bar and logo, VisualDSP++, the VisualDSP++ logo, Blackfin, the Blackfin logo, CROSSCORE, the CROSSCORE logo, EZ-KIT Lite, and EZ-Extender are registered trademarks of Analog Devices, Inc.

All other brand and product names are trademarks or service marks of their respective owners.

Regulatory Compliance

The ADSP-BF561 EZ-KIT Lite is designed to be used solely in a laboratory environment. The board is not intended for use as a consumer end product or as a portion of a consumer end product. The board is an open system design which does not include a shielded enclosure and therefore may cause interference to other electrical devices in close proximity. This board should not be used in or near any medical equipment or RF devices.

The ADSP-BF561 EZ-KIT Lite has been certified to comply with the essential requirements of the European EMC directive 89/336/EEC amended by 93/68/EEC and therefore carries the “CE” mark.

The ADSP-BF561 EZ-KIT Lite has been appended to Analog Devices, Inc. Technical Construction File (TCF) referenced ‘DSPTOOLS1’ dated December 21, 1997 and was awarded CE Certification by an appointed European Competent Body as listed below.

Technical Certificate No: Z600ANA1.016

Issued by: Technology International (Europe) Limited
60 Shrivenham Hundred Business Park
Shrivenham, Swindon, SN6 8TY, UK



The EZ-KIT Lite evaluation system contains ESD (electrostatic discharge) sensitive devices. Electrostatic charges readily accumulate on the human body and equipment and can discharge without detection. Permanent damage may occur on devices subjected to high-energy discharges. Proper ESD precautions are recommended to avoid performance degradation or loss of functionality. Store unused EZ-KIT Lite boards in the protective shipping package.



CONTENTS

PREFACE

Purpose of This Manual	xii
Intended Audience	xii
Manual Contents	xiii
What's New in This Manual	xiii
Technical or Customer Support	xiv
Supported Processors	xiv
Product Information	xv
MyAnalog.com	xv
Processor Product Information	xv
Related Documents	xvi
Online Technical Documentation	xvii
Printed Manuals	xix
Notation Conventions	xx

USING ADSP-BF561 EZ-KIT LITE

Package Contents	1-2
Default Configuration	1-3
Installation and Session Startup	1-5

CONTENTS

Evaluation License Restrictions	1-7
Memory Map	1-7
LEDs and Push Buttons	1-10
Audio Interface	1-11
Video Interface	1-12
Example Programs	1-13
Flash Programmer Utility	1-13
Background Telemetry Channel	1-14

ADSP-BF561 EZ-KIT LITE HARDWARE REFERENCE

System Architecture	2-2
External Bus Interface Unit	2-3
SPORT Audio Interface	2-3
SPI Interface	2-3
Programmable Flags	2-4
PPI Interfaces	2-6
Video Output (PPI1)	2-7
Video Input (PPI0)	2-8
UART Port	2-8
Expansion Interface	2-8
JTAG Emulation Port	2-9
Jumper and DIP Switch Settings	2-10
Video Configuration Switch (SW2)	2-10
Boot Mode Switch (SW3)	2-11
Push Button Enable Switch (SW4)	2-12

PPI Clock Select Switch (SW5)	2-13
Test DIP Switches (SW10 and SW11)	2-13
Audio Enable Switch (SW12)	2-13
SPIS1/SPISS Select (SW13)	2-14
Video Encoder Clock Select Jumper (JP1)	2-14
VDDINT Select Jumpers (JP2 and JP3)	2-14
UART Loop Jumper (P1)	2-15
LEDs and Push Buttons	2-15
Reset Push Button (SW1)	2-16
Programmable Flag Push Buttons (SW6–9)	2-16
Power LED (LED1)	2-16
Reset LED (LED2)	2-17
USB Monitor LED (ZLED3)	2-17
User LEDs (LED5–12, LED13–20)	2-17
Connectors	2-18
Expansion Interface (J1–3)	2-19
Audio (J4 and J5)	2-19
Video (J6)	2-19
Power (J7)	2-20
RS-232 (P2)	2-20
SPORT1 (P3)	2-20
SPI (P5)	2-21
JTAG (ZP4)	2-21

CONTENTS

ADSP-BF561 EZ-KIT LITE BILL OF MATERIALS

ADSP-BF561 EZ-KIT LITE SCHEMATIC

Title Page	B-1
Processor – External Memory Interface	B-2
Processor – Programmable Flags, SPI	B-3
Processor – PPI0 and PPI1	B-4
Flash Memory and SDRAM	B-5
Audio Codec	B-6
Audio Out	B-7
Audio In	B-8
Video Encoder (Video Out)	B-9
Video Decoder (Video In)	B-10
Reset, Push Button Switches, UART	B-11
Extender Card Connectors	B-12
Power	B-13
Decoupling Caps	B-14

INDEX

PREFACE

Thank you for purchasing the ADSP-BF561 EZ-KIT Lite[®], Analog Devices, Inc. evaluation system for Blackfin[®] processors.

Blackfin processors support a media instruction set computing (MISC) architecture. This architecture is the natural merging of RISC, media functions, and digital signal processing (DSP) characteristics. Blackfin processors deliver signal-processing performance in a microprocessor-like environment.


The evaluation board is designed to be used in conjunction with the VisualDSP++[®] development environment to test the capabilities of the ADSP-BF561 Blackfin processors. The VisualDSP++ development environment gives you the ability to perform advanced application code development and debug, such as:

- Create, compile, assemble, and link application programs written in C++, C, and ADSP-BF561 assembly
- Load, run, step, halt, and set breakpoints in application programs
- Read and write data and program memory
- Read and write core and peripheral registers
- Plot memory

Access to the ADSP-BF561 processor from a personal computer (PC) is achieved through a USB port or an optional JTAG emulator. The USB interface gives unrestricted access to the ADSP-BF561 processor and the evaluation board peripherals. Analog Devices JTAG emulators offer faster

communication between the host PC and target hardware. Analog Devices carries a wide range of in-circuit emulation products. To learn more about Analog Devices emulators and processor development tools, go to <http://www.analog.com/dsp/tools/>.

The ADSP-BF561 EZ-KIT Lite provides example programs to demonstrate the capabilities of the evaluation board.

 The ADSP-BF561 EZ-KIT Lite installation is part of the VisualDSP++ installation. The EZ-KIT Lite is a licensed product that offers an unrestricted evaluation license for the first 90 days. For details about evaluation license restrictions after the 90 days, refer to “[Evaluation License Restrictions](#)” on page 1-7 and the *VisualDSP++ Installation Quick Reference Card*.

The board features:

- Analog Devices ADSP-BF561 Blackfin processor
 - ✓ 256-pin mini-BGA package
 - ✓ 30 MHz CLKIN oscillator
- Synchronous dynamic random access memory (SDRAM)
 - ✓ 64 MB (16M x 16 bits x 2 chips)
- Flash memory
 - ✓ 8 MB (4M x 16 bits)
- Analog audio interface
 - ✓ AD1836 A – Analog Devices 96 kHz audio codec
 - ✓ 4 input RCA phono jacks (2 stereo channels)
 - ✓ 6 output RCA phono jacks (3 stereo channels)

- Analog video interface
 - ✓ ADV7183A video decoder w/ 3 input RCA phono jacks
 - ✓ ADV7179 video encoder w/ 3 output RCA phono jacks
- Universal asynchronous receiver/transmitter (UART)
 - ✓ ADM3202 RS-232 line driver/receiver
 - ✓ DB9 male connector
- LEDs
 - ✓ 20 LEDs: 1 power (green), 1 board reset (red), 1 USB (red), 16 general-purpose (amber), and 1 USB monitor (amber)
- Push buttons
 - ✓ 5 push buttons with debounce logic: 1 reset, 4 programmable flags
- Expansion interface
 - ✓ PPI 0, PPI 1, SPI, EBIU, Timers11-0, UART, programmable flags, SPORT0, SPORT1
- Other features
 - ✓ JTAG ICE 14-pin header

The EZ-KIT Lite board holds 8 MB of flash memory, which can be used to store user-specific boot code, allowing the board to run as a stand-alone unit. The board also holds 512-Mb SDRAM, which can be used at runtime. For more information see [“Memory Map” on page 1-7](#).

SPORT0 interfaces with the AD1836A audio codec, facilitating creation of audio signal processing applications. SPORT0 also attaches to an off-board connector to allow communication with other serial devices. For information about SPORT0, see [“SPORT Audio Interface” on page 2-3](#).

Purpose of This Manual

The parallel peripheral interfaces (PPIs) of the processor connect to both a video encoder and video decoder, facilitating creation of video signal processing applications. For information on how the board utilizes the processor's PPIs, see [“PPI Interfaces” on page 2-6](#).

The UART of the processor connects to an RS-232 line driver and a DB9 male connector, allowing you to interface with a PC or other serial device. For information about the UART, see [“UART Port” on page 2-8](#).

Additionally, the EZ-KIT Lite board provides access to most of the processor's peripheral ports. Access is provided in the form of a three-connector expansion interface. For information about the expansion interface, see [“Expansion Interface” on page 2-8](#).

Purpose of This Manual

The *ADSP-BF561 EZ-KIT Lite Evaluation System Manual* provides instructions for installing the product hardware (board). The text describes operation and configuration of the board components and provides guidelines for running your own code on the ADSP-BF561 EZ-KIT Lite. Finally, a schematic and a bill of materials are provided as a reference for future designs.

The product software installation is detailed in the *VisualDSP++ Installation Quick Reference Card*.

Intended Audience

The primary audience for this manual is a programmer who is familiar with Analog Devices processors. This manual assumes that the audience has a working knowledge of the appropriate processor architecture and instruction set. Programmers who are unfamiliar with Analog Devices processors can use this manual but should supplement it with other texts

(such as the *ADSP-BF561 Blackfin Processor Hardware Reference* and *Blackfin Processor Instruction Set Reference*) that describe your target architecture.

Programmers who are unfamiliar with VisualDSP++ should refer to the VisualDSP++ online Help and user's or getting started guides. For the locations of these documents, see [“Related Documents”](#).

Manual Contents

The manual consists of:

- Chapter 1, [“Using ADSP-BF561 EZ-KIT Lite” on page 1-1](#)
Describes the EZ-KIT Lite functionality from a programmer's perspective and provides an easy-to-access memory map
- Chapter 2, [“ADSP-BF561 EZ-KIT Lite Hardware Reference” on page 2-1](#)
Provides information on the EZ-KIT Lite hardware components.
- Appendix A, [“ADSP-BF561 EZ-KIT Lite Bill Of Materials” on page A-1](#)
Provides a list of components used to manufacture the EZ-KIT Lite board.
- Appendix B, [“ADSP-BF561 EZ-KIT Lite Schematic” on page B-1](#)
Provides the resources to allow EZ-KIT Lite board-level debugging or to use as a reference design. Appendix B is part of the online Help.

What's New in This Manual

The *ADSP-BF561 EZ-KIT Lite Evaluation System Manual* has been updated to reflect the latest revision of the board.

Technical or Customer Support

You can reach Analog Devices, Inc. Customer Support in the following ways:

- Visit the Embedded Processing and DSP products Web site at <http://www.analog.com/processors/technicalSupport>
- E-mail tools questions to processor.tools.support@analog.com
- E-mail processor questions to processor.support@analog.com (World wide support)
processor.europe@analog.com (Europe support)
processor.china@analog.com (China support)
- Phone questions to **1-800-ANALOGD**
- Contact your Analog Devices, Inc. local sales office or authorized distributor
- Send questions by mail to:
Analog Devices, Inc.
One Technology Way
P. O. Box 9106
Norwood, MA 02062-9106
USA

Supported Processors

This EZ-KIT Lite evaluation system supports Analog Devices ADSP-BF561 Blackfin embedded processors.

Product Information

You can obtain product information from the Analog Devices Web site, from the product CD-ROM, or from printed publications (manuals).

Analog Devices is online at www.analog.com. Our Web site provides information about a broad range of products— analog integrated circuits, amplifiers, converters, and digital signal processors.

MyAnalog.com

MyAnalog.com is a free feature of the Analog Devices Web site that allows customization of a Web page to display only the latest information on products you are interested in. You can also choose to receive weekly e-mail notifications containing updates to the Web pages that meet your interests. MyAnalog.com provides access to books, application notes, data sheets, code examples, and more.

Registration:

Visit www.myanalog.com to sign up. Click **Register** to use MyAnalog.com. Registration takes about five minutes and serves as means for you to select the information you want to receive.

If you are already a registered user, just log on. Your user name is your e-mail address.

Processor Product Information

For information on embedded processors and DSPs, visit our Web site at www.analog.com/processors, which provides access to technical publications, data sheets, application notes, product overviews, and product announcements.

Product Information

You may also obtain additional information about Analog Devices and its products in any of the following ways.

- E-mail questions or requests for information to
processor.support@analog.com (World wide support)
processor.europe@analog.com (Europe support)
processor.china@analog.com (China support)
- Fax questions or requests for information to
1-781-461-3010 (North America)
+49-89-76903-157 (Europe)

Related Documents

For information on product related development software, see the following publications.

Table 1. Related Processor Publications

Title	Description
<i>ADSP-BF561 Blackfin Embedded Symmetric Multi-Processor Datasheet</i>	General functional description, pinout, and timing
<i>ADSP-BF561 Blackfin Processor Hardware Reference</i>	Description of internal processor architecture and all register functions
<i>Blackfin Processor Instruction Set Reference</i>	Description of all allowed processor assembly instructions

Table 2. Related VisualDSP++ Publications

Title	Description
<i>VisualDSP++ User's Guide</i>	Description of VisualDSP++ features and usage
<i>VisualDSP++ Assembler and Preprocessor Manual</i>	Description of the assembler function and commands
<i>VisualDSP++ C/C++ Compiler and Library Manual for Blackfin Processors</i>	Description of the compiler function and commands for Blackfin processors

Table 2. Related VisualDSP++ Publications (Cont'd)

Title	Description
<i>VisualDSP++ Linker and Utilities Manual</i>	Description of the linker function and commands
<i>VisualDSP++ Loader and Utilities Manual</i>	Description of the loader/splitter function and commands



If you plan to use the EZ-KIT Lite board in conjunction with a JTAG emulator, also refer to the documentation that accompanies the emulator.

All documentation is available online. Most documentation is available in printed form.

Visit the Technical Library Web site to access all processor and tools manuals and data sheets:

[http://www.analog.com/processors/technical Support/technical Library/](http://www.analog.com/processors/technical%20Support/technical%20Library/).

Online Technical Documentation

Online documentation comprises the VisualDSP++ Help system, software tools manuals, hardware tools manuals, processor manuals, the Dinkum Abridged C++ library, and Flexible License Manager (FlexLM) network license manager software documentation. You can easily search across the entire VisualDSP++ documentation set for any topic of interest. For easy printing, supplementary .pdf files of most manuals are provided in the Docs folder on the VisualDSP++ installation CD.

Product Information

Each documentation file type is described as follows.

File	Description
.chm	Help system files and manuals in Help format
.htm or .html	Dinkum Abridged C++ library and FlexLM network license manager software documentation. Viewing and printing the .html files requires a browser, such as Internet Explorer 6.0 (or higher).
.pdf	VisualDSP++ and processor manuals in Portable Documentation Format (PDF). Viewing and printing the .pdf files requires a PDF reader, such as Adobe Acrobat Reader (4.0 or higher).

If documentation is not installed on your system as part of the software installation, you can add it from the VisualDSP++ CD at any time by running the Tools installation. Access the online documentation from the VisualDSP++ environment, Windows[®] Explorer, or the Analog Devices Web site.

Accessing Documentation From VisualDSP++

To view VisualDSP++ Help, click on the **Help** menu item or go to the Windows task bar and navigate to the VisualDSP++ documentation via the **Start** menu. To view ADSP-BF561 EZ-KIT Lite Help, which is part of the VisualDSP++ Help system, use the **Contents** or **Search** tab of the Help window.

Accessing Documentation From Windows

In addition to any shortcuts you may have constructed, there are many ways to open VisualDSP++ online Help or the supplementary documentation from Windows.

Help system files (.chm) are located in the `Help` folder, and .pdf files are located in the `Docs` folder of your VisualDSP++ installation CD-ROM. The `Docs` folder also contains the Dinkum Abridged C++ library and the FlexLM network license manager software documentation.

Your software installation kit includes online Help as part of the Windows interface. These help files provide information about VisualDSP++ and the ADSP-BF561 EZ-KIT Lite evaluation system.

Accessing Documentation From Web

Download manuals at the following Web site:

<http://www.analog.com/processors/technicalSupport/technicalLibrary/>.

Select a processor family and book title. Download archive (.zip) files, one for each manual. Use any archive management software, such as WinZip, to decompress downloaded files.

Printed Manuals

For general questions regarding literature ordering, call the Literature Center at **1-800-ANALOGD (1-800-262-5643)** and follow the prompts.

Processor Manuals

Hardware reference and instruction set reference manuals may be ordered through the Literature Center at 1-800-ANALOGD (1-800-262-5643), or downloaded from the Analog Devices Web site. Manuals may be ordered by title or by product number located on the back cover of each manual.

Data Sheets

All data sheets (preliminary and production) may be downloaded from the Analog Devices Web site. Only production (final) data sheets (Rev. 0, A, B, C, and so on) can be obtained from the Literature Center at 1-800-ANALOGD (1-800-262-5643); they also can be downloaded from the Web site.




Notation Conventions

To have a data sheet faxed to you, call the Analog Devices Faxback System at **1-800-446-6212**. Follow the prompts and a list of data sheet code numbers will be faxed to you. If the data sheet you want is not listed, check for it on the Web site.

Notation Conventions

Text conventions used in this manual are identified and described as follows.

Example	Description
Close command (File menu)	Titles in reference sections indicate the location of an item within the VisualDSP++ environment's menu system (for example, the Close command appears on the File menu).
{this that}	Alternative required items in syntax descriptions appear within curly brackets and separated by vertical bars; read the example as <i>this</i> or <i>that</i> . One or the other is required.
[this that]	Optional items in syntax descriptions appear within brackets and separated by vertical bars; read the example as an optional <i>this</i> or <i>that</i> .
[this, ...]	Optional item lists in syntax descriptions appear within brackets delimited by commas and terminated with an ellipse; read the example as an optional comma-separated list of <i>this</i> .
.SECTION	Commands, directives, keywords, and feature names are in text with letter gothic font.
<i>filename</i>	Non-keyword placeholders appear in text with italic style format.

Example	Description
	<p>Note: For correct operation, ...</p> <p>A Note provides supplementary information on a related topic. In the online version of this book, the word Note appears instead of this symbol.</p>
	<p>Caution: Incorrect device operation may result if ...</p> <p>Caution: Device damage may result if ...</p> <p>A Caution identifies conditions or inappropriate usage of the product that could lead to undesirable results or product damage. In the online version of this book, the word Caution appears instead of this symbol.</p>
	<p>Warning: Injury to device users may result if ...</p> <p>A Warning identifies conditions or inappropriate usage of the product that could lead to conditions that are potentially hazardous for the devices users. In the online version of this book, the word Warning appears instead of this symbol.</p>

Notation Conventions

1 USING ADSP-BF561 EZ-KIT LITE

This chapter provides specific information to assist you with development of programs for the ADSP-BF561 EZ-KIT Lite evaluation system.

The information appears in the following sections.

- [“Package Contents” on page 1-2](#)
Lists the items contained in your ADSP-BF561 EZ-KIT Lite package.
- [“Default Configuration” on page 1-3](#)
Shows the default configuration of the ADSP-BF561 EZ-KIT Lite.
- [“Installation and Session Startup” on page 1-5](#)
Instructs how to start a new or open an existing ADSP-BF561EZ-KIT Lite session using VisualDSP++.
- [“Evaluation License Restrictions” on page 1-7](#)
Describes the restrictions of the VisualDSP++ demo license shipped with the EZ-KIT Lite.
- [“Memory Map” on page 1-7](#)
Defines the ADSP-BF561 EZ-KIT Lite’s external memory map.
- [“LEDs and Push Buttons” on page 1-10](#)
Describes the board’s LEDs and push buttons.
- [“Audio Interface” on page 1-11](#)
Describes the board’s audio interface.
- [“Video Interface” on page 1-12](#)
Describes the board’s video interface.

Package Contents

- [“Example Programs” on page 1-13](#)
Provides information about the example programs included in the ADSP-BF561 EZ-KIT Lite evaluation system.
- [“Flash Programmer Utility” on page 1-13](#)
Highlights the advantages of the Flash Programmer utility of VisualDSP++.
- [“Background Telemetry Channel” on page 1-14](#)
Highlights the advantages of the Background Telemetry Channel feature of VisualDSP++.

For information on the graphical user interface, including the boot loading, target options, and other facilities of the EZ-KIT Lite system, refer to the online Help.

For more detailed information about programming the ADSP-BF561 Blackfin processor, see the documents referred to as [“Related Documents”](#).

Package Contents

Your ADSP-BF561 EZ-KIT Lite evaluation system package contains the following items.

- ADSP-BF561 EZ-KIT Lite board
- *VisualDSP++ Installation Quick Reference Card*
- CD containing:
 - ✓ VisualDSP++ software
 - ✓ ADSP-BF561 EZ-KIT Lite software
 - ✓ USB driver files

- ✓ Example programs
- ✓ *ADSP-BF561 EZ-KIT Lite Evaluation System Manual* (this document)
- Universal 7V DC power supply
- USB 2.0 cable

If any item is missing, contact the vendor where you purchased your EZ-KIT Lite or contact Analog Devices, Inc.

Default Configuration

The EZ-KIT Lite evaluation system contains ESD (electrostatic discharge) sensitive devices. Electrostatic charges readily accumulate on the human body and equipment and can discharge without detection. Permanent damage may occur on devices subjected to high-energy discharges. Proper ESD precautions are recommended to avoid performance degradation or loss of functionality. Store unused EZ-KIT Lite boards in the protective shipping package.



The ADSP-BF561 EZ-KIT Lite board is designed to run outside your personal computer as a stand-alone unit. You do not have to open your computer case.

When removing the EZ-KIT Lite board from the package, handle the board carefully to avoid the discharge of static electricity, which may damage some components. [Figure 1-1](#) shows the default jumper settings, DIP switch, connector locations, and LEDs used in installation. Confirm that your board is set up in the default configuration before using the board.

Default Configuration

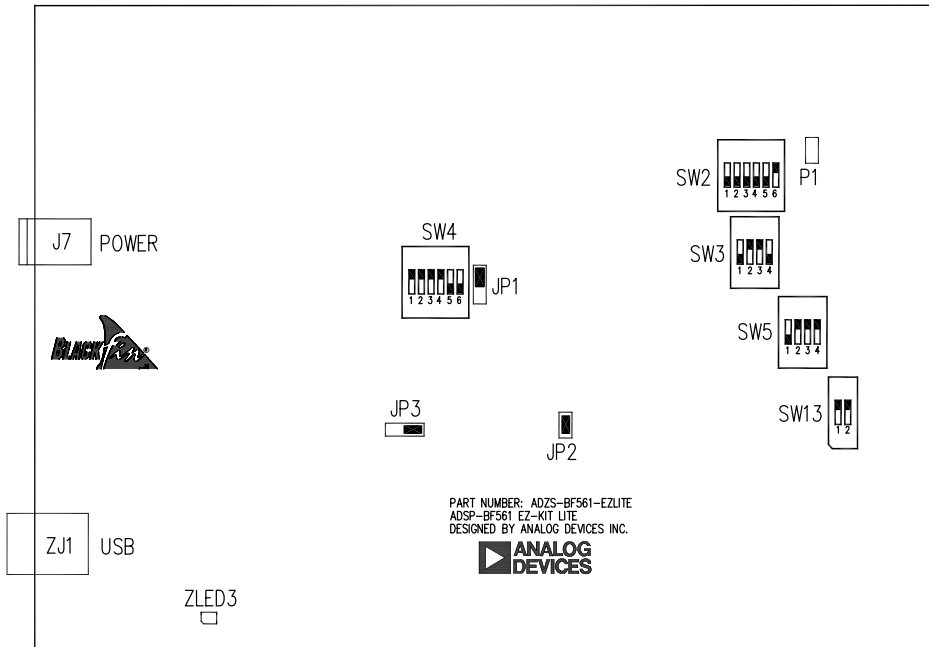



Figure 1-1. EZ-KIT Lite Hardware Setup

Installation and Session Startup

 For correct operation, install the software and hardware in the order presented in the *VisualDSP++ Installation Quick Reference Card*.

1. Verify that the yellow USB monitor LED (ZLED3, located near the USB connector) is lit. This signifies that the board is communicating properly with the host PC and is ready to run VisualDSP++.
2. If you are running VisualDSP++ for the first time, navigate to the VisualDSP++ environment via the **Start** → **Programs** menu. The main window appears. Note that VisualDSP++ does not connect to any session. Skip the rest of this step to step 3.

If you have run VisualDSP++ previously, the last opened session appears on the screen. You can override the default behavior and force VisualDSP++ to start a new session by pressing and holding down the **Ctrl** key while starting VisualDSP++. Do not release the **Ctrl** key until the **Session Wizard** appears on the screen. Go to step 4.

3. To connect to a new EZ-KIT Lite session, start **Session Wizard** by selecting one of the following.
 - From the **Session** menu, **New Session**.
 - From the **Session** menu, **Session List**. Then click **New Session** from the **Session List** dialog box.
 - From the **Session** menu, **Connect to Target**.
4. The **Select Processor** page of the wizard appears on the screen. Ensure **Blackfin** is selected in **Processor family**. In **Choose a target processor**, select **ADSP-BF561**. Click **Next**.
5. The **Select Connection Type** page of the wizard appears on the screen. Select **EZ-KIT Lite** and click **Next**.

Installation and Session Startup


6. The **Select Platform** page of the wizard appears on the screen. In the **Select your platform** list, select **ADSP-BF561 EZ-KIT Lite via Debug Agent**. In **Session name**, highlight or specify the session name.

The session name can be a string of any length; although, the box displays approximately 32 characters. The session name can include space characters. If you do not specify a session name, VisualDSP++ creates a session name by combining the name of the selected platform with the selected processor. The only way to change a session name later is to delete the session and to open a new session.

Click **Next**.

7. The **Finish** page of the wizard appears on the screen. The page displays your selections. If you are satisfied, click **Finish**. If not, click **Back** to make changes.




To disconnect from a session, click the disconnect button  or select **Session** ->**Disconnect from Target**.

To delete a session, select **Session** -> **Session List**. Select the session name from the list and click **Delete**. Click **OK**.

Evaluation License Restrictions

The ADSP-BF561 EZ-KIT Lite installation is part of the VisualDSP++ installation. The EZ-KIT Lite is a licensed product that offers an unrestricted evaluation license for the first 90 days. Once the initial unrestricted 90-day evaluation license expires:

- VisualDSP++ allows a connection to the ADSP-BF561 EZ-KIT Lite via the USB Debug Agent interface only. Connections to simulators and emulation products are no longer allowed.
- The linker restricts a users program to 41 KB of internal memory for code space with no restrictions for data space.

 The EZ-KIT Lite hardware must be connected and powered up to use VisualDSP++ with a valid evaluation or permanent license.

Refer to the *VisualDSP++ Installation Quick Reference Card* for details.

Memory Map

The EZ-KIT Lite board includes two types of external memory, 64-MB SDRAM and 8-MB flash. See the external memory map in [Table 1-1](#). The complete configuration of the ADSP-BF561 processor internal SRAM is detailed in [Figure 1-2](#).

Table 1-1. EZ-KIT Lite External Memory Map

Start Address	End Address	Description
0x00000000	0x3FFFFFFF	SDRAM bank 0; see “ Memory Map ” on page 1-7
0x20000000	0x207FFFFFFF	ASYNCR memory bank 0; see “ Memory Map ” on page 1-7.
All other locations		Not used

Memory Map

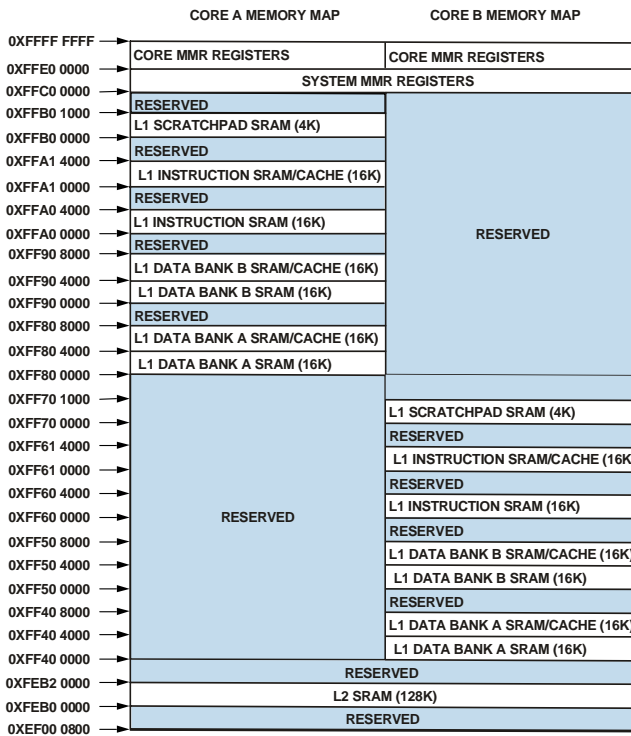


Figure 1-2. ADSP-BF561 Processor Internal Memory Map

The 8 MB of flash memory is organized as 4M x 16 bit and mapped into a ADSP-BF561 processor's ASYNC memory bank 0. The $\bar{AMS0}$ memory select signal connects to the output enable pin of flash memory.

The 64 MB of SDRAM is organized as 16M x 32 bits wide. The processor's memory select pin $\bar{SMS0}$ is configured for SDRAM. Three SDRAM control registers must be initialized in order to access the SDRAM memory.

When in a VisualDSP++ EZ-KIT Lite session, you can configure the SDRAM registers automatically by selecting the **Use XML reset values** box on the **Target Options** dialog box, which is accessible through the

Settings pull-down menu. The `EBI_U_SDGCTL`, `EBI_U_SDBCTL`, and `EBI_U_SDRRC` register values have been set in the `ADSP-BF561.xml` file found in your `Visual DSP\SYSTEM` folder under the `RegReset` tag. These values can be changed to be more optimal depending on the `SCLK` frequency.

The values in [Table 1-2](#) are set by default whenever bank 0 is accessed through the debugger (for example, when viewing memory windows or loading a program). The numbers are derived for maximum flexibility and work for a system clock frequency between 60 MHz and 133 MHz.

Table 1-2. EZ-KIT Lite Session SDRAM Default Settings

Register	Value	Function
<code>EBI_U_SDGCTL</code>	0x0091998D	Calculated with <code>SCLK</code> = 133 MHz
<code>EBI_U_SDBCTL</code>	0x00000013	
<code>EBI_U_SDRRC</code>	0x000001CF	Calculated with <code>SCLK</code> = 120 MHz

The `EBI_U_SDGCTL` register can be written once after the processor comes out of reset. Therefore, the user code should not re-initialize the register. Clearing the **Use XML reset values** checkbox allows manual configuration of the `EBI_U` registers. For more information, see online Help.

Automatic configuration of SDRAM is not optimized for a specific `SCLK` frequency. [Table 1-3](#) shows the optimized configuration of the SDRAM registers using a 120 MHz `SCLK`. The frequency of 120 MHz is the maximum `SCLK` frequency when using a 600 MHz core frequency, the maximum frequency for the EZ-KIT Lite. Only the `EBI_U_SDRRC` register needs to be modified in the user code to achieve maximum performance.

Table 1-3. SDRAM Optimum Settings¹

Register	Value
<code>EBI_U_SDGCTL</code>	0x0091998D
<code>EBI_U_SDBCTL</code>	0x00000013

LEDs and Push Buttons

Table 1-3. SDRAM Optimum Settings¹ (Cont'd)

Register	Value
EBI U_SDRRC	0x000003A0

1 Calculated with SCLK = 120 MHz

For more information, see [“External Bus Interface Unit”](#) on page 2-3.



An example program is included in the EZ-KIT installation directory to demonstrate the SDRAM interface setup.


LEDs and Push Buttons

The EZ-KIT Lite provides four push buttons and sixteen LEDs for general-purpose IO.

Sixteen LEDs, labeled LED5 through LED20, are controlled by the processor's programmable flags PF32 through PF47 (equivalent to PPI 0_D15–8 and PPI 1_D15–8). These LEDs are accessed through the FLAG 2 registers. First, the direction must be configured to output by setting the bits of the FI 02_DI R register to 1. Then the value of the LEDs are modified using one of the FI 02_FLAG_D, FI 02_FLAG_C, FI 02_FLAG_S, or FI 02_FLAG_T registers.

The four general-purpose push buttons are labeled SW6 through SW9. The buttons connect to the programmable flags PF8–5. A status of each individual button can be read through the FI 00_FLAG_D register. A switch is being pressed-on when the corresponding bit of the register reads 1. When the switch is released, the bit reads 0. A connection between the push but-

ton and PF input is established through the SW4 DIP switch. For information on how to disconnect the switch from the programmable flag and use it for another objective, see “[Push Button Enable Switch \(SW4\)](#)”.

 An example program is included in the EZ-KIT Lite installation directory to demonstrate functionality of the LEDs and push buttons.

Audio Interface

The AD1836A audio codec provides three channels of stereo audio output and two channels of multichannel 96 kHz input. The SPORT0 interface of the processor links with the stereo audio data input and output pins of the AD1836A codec. The processor is capable of transferring data to the audio codec in time-division multiplexed (TDM) or 2-wire serial interface (TWI) mode.

In TWI mode, the codec can operate at a 96 kHz sample rate but restricts the output to two channels. In TDM mode, the codec can operate at a maximum of 48 kHz sample rate but allows simultaneous use of all input and output channels. When using TWI mode, the TSCLKO and RSCLKO pins (as well as the TFSO and RFSO pins of the processor) must be tied together externally to the processor. This is accomplished with the SW4 DIP switch. See “[Push Button Enable Switch \(SW4\)](#)” on page 2-12 for more information.

The AD1836A audio codec’s internal configuration registers are configured using the processor’s PF4 programmable flag pin, used as the select for the audio device. For more information on how to configure the multichannel codec, download the codec datasheet from the Analog Devices Web site, www.analog.com.

Video Interface

The AD1836A codec reset is controlled by the processor's programmable flag PF15. When PF15 is 0, the reset is asserted. When PF15 is 1, the reset is de-asserted. Note that when PF15 is not driven (configured as input), the AD1836A reset is asserted due to the pull-down resistor. See [“Programmable Flags” on page 2-4](#) for more information.



Example programs are included in the EZ-KIT Lite installation directory to demonstrate the AD1836A codec operation.

Video Interface


The board supports video input and output applications. The ADV7179 video encoder provides up to three output channels of analog video, while the ADV7183A video decoder provides up to three input channels of analog video. The video encoder connects to the parallel peripheral interface 1 (PPI 1), while the video decoder connects to the parallel peripheral interface 0, (PPI 0). Each PPI interface has an individual clock that is configured by the SW5 switch settings. See [“PPI Clock Select Switch \(SW5\)” on page 2-13](#) for more information.

Both the encoder and the decoder connect to the parallel peripheral interfaces (PPI input clock) of the processor. For additional information on the video interface hardware, refer to [“PPI Interfaces” on page 2-6](#).

For the video interface to be operational, the following basic steps must be performed.

1. Configure the SW2 DIP switch as required by the application. Refer to [“Video Configuration Switch \(SW2\)” on page 2-10](#) for details.
2. De-assert the video device's reset by setting high a corresponding programmable flag. PF14 controls the ADV7179 encoder's reset, while PF13 controls the ADV7183A decoder's reset.

3. If using the ADV7183A decoder:
 - ✓ Enable device by driving programmable flag output PF2 to 0.
 - ✓ Select PPI 0 clock; for details, refer to “PPI Clock Select Switch (SW5)” on page 2-13.
4. Program internal registers of the video device in use. Both video encoder and decoder use a 2-wire serial interface to access internal registers. The PF0 programmable flag functions as a serial clock (SCL), and PF1 functions as a serial data (SDAT).
5. Program the ADSP-BF561 processor’s PPI interfaces (configuration registers, DMA, and so on).

 Example programs are included in the EZ-KITLite installation directory to demonstrate the capabilities of the video interface.

Example Programs

Example programs are provided with the ADSP-BF561 EZ-KIT Lite to demonstrate various capabilities of the evaluation board. These programs are installed with the EZ-KIT Lite software and can be found in the `...\\Blackfin\\Examples\\ADSP-BF561 EZ-KIT Lite` subdirectory of the VisualDSP++ installation directory. Please refer to the readme file provided with each example for more information.

Flash Programmer Utility

The ADSP-BF561 EZ-KIT Lite evaluation system includes a Flash Programmer utility. The utility allows you to program flash memory on the EZ-KIT Lite. The Flash Programmer is installed with VisualDSP++. Once the utility is installed, it is accessible from the **Tools** pull-down menu.

Background Telemetry Channel

The Flash Programmer driver is core-specific (core A) and must be loaded to the core A in order to operate correctly. The Flash Programmer relies on the user to set the correct core focus. To set up the correct core, select the core A in the multiprocessor window before opening the Flash Programmer interface.

For more information on the Flash Programmer utility, refer to the online Help.

Background Telemetry Channel

The ADSP-BF561 USB debug agent supports the background telemetry channel (BTC), which facilitates data exchange between VisualDSP++ and the processor without interrupting processor execution.

The BTC allows to view a variable as it is updated or changed, all while the processor continues to execute. For increased performance of the BTC, including faster reading and writing, please check our latest line of processor emulators at <http://www.analog.com/processors/block-firmware/evaluationDevelopment/crosscore/>. For more information about the background telemetry channel, see the *VisualDSP++ User's Guide* or online Help.

2 ADSP-BF561 EZ-KIT LITE HARDWARE REFERENCE

This chapter describes the hardware design of the ADSP-BF561 EZ-KIT Lite board. The following topics are covered.

- [“System Architecture” on page 2-2](#)
Describes the ADSP-BF561 EZ-KIT Lite configuration and explains how the board components interface with the processor.
- [“Jumper and DIP Switch Settings” on page 2-10](#)
Shows the locations and describes the configuration jumpers and switches.
- [“LEDs and Push Buttons” on page 2-15](#)
Shows the locations and describes the LEDs and push buttons.
- [“Connectors” on page 2-18](#)
Shows the locations and provides part numbers for the on-board connectors. In addition, the manufacturer and part number information is provided for the mating parts.

System Architecture

This section describes the processor's configuration on the EZ-KIT Lite board.

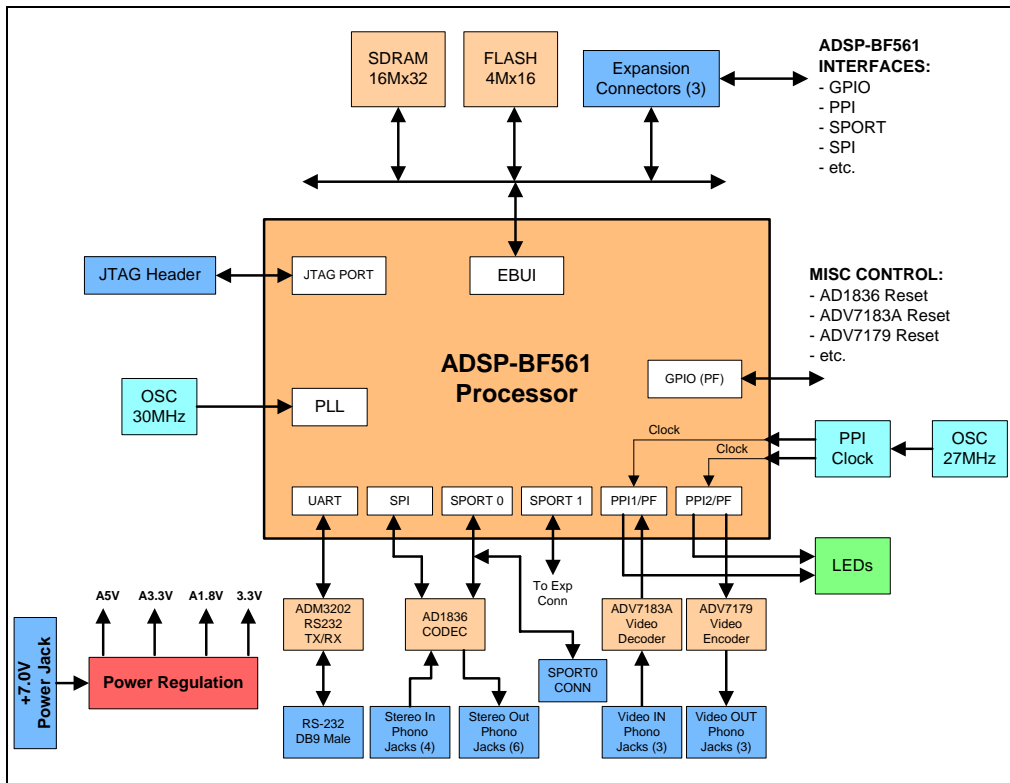


Figure 2-1. System Architecture

This EZ-KIT Lite has been designed to demonstrate the capabilities of the ADSP-BF561 Blackfin processor. The processor has an IO voltage of 3.3V. The core voltage and the core clock rate can be set on the fly by the processor. The input clock is 30 MHz.

External Bus Interface Unit

The external bus interface unit (EBIU) connects external memory to the ADSP-BF561 processor. It includes a 32-bit wide data bus, an address bus (A₂₅₋₂), and a control bus. All of the 8-bit, 16-bit, and 32-bit accesses are supported. On the EZ-KIT Lite board, the EBI unit connects to SDRAM and flash memory. For more information on using the external memory see [“Memory Map” on page 1-7](#).

All of the address, data, and control signals are available externally via the expansion interface connectors (J₁₋₃). The pinout of these connectors can be found in [“ADSP-BF561 EZ-KIT Lite Schematic” on page B-1](#).

SPORT Audio Interface

The SPORT₀ interface connects to the AD1836A audio codec and the expansion interface. The AD1836A codec uses both the primary and secondary data transmit and receive pins to input and output data from the audio input and outputs.

The SPORT₁ interface connects to the SPORT connector (P₃).

The pinout of the SPORT and expansion interface connectors can be found in [“ADSP-BF561 EZ-KIT Lite Schematic” on page B-1](#).

SPI Interface

The processor’s serial peripheral interface (SPI) connects to the AD1836A audio codec and the expansion interface. The SPI connection to the AD1836A codec is used to access the control registers of the device. The PF₄ flag of the processor acts as the device select for the SPI port.

The SPI signals are available on the expansion interface and on the SPI connector (P₅). The pinout for the interface can be found in [“ADSP-BF561 EZ-KIT Lite Schematic” on page B-1](#).

Programmable Flags

The processor has 48 programmable flag pins (PFs). Many of the flags are multi-functional and depend on the processor's setup. [Table 2-1](#) shows how the programmable flag pins are used on the EZ-KIT Lite.

Table 2-1. Programmable Flag Connections

Processor PF Pin	Processor Function	EZ-KIT Lite Function
PF0	SPI select S, timer 0	Serial clock for programming ADV7179 video encoder and ADV7183A video decoder.
PF1	SPI select 1, timer 1	Serial data for programming ADV7179 video encoder and ADV7183A video decoder.
PF2	SPI select 2, timer 2	ADV7183A video decoder's -OE .
PF3	SPI select 3, timer 3	ADV7183A FIELD pin. See "Video Configuration Switch (SW2)" on page 2-10.
PF4	SPI select 4, timer 4	AD1836A audio codec's SPI select.
PF5	SPI select 5, timer 5	Push button (SW6). See "LEDs and Push Buttons" on page 1-10 and "Push Button Enable Switch (SW4)" on page 2-12 for information on how to disable the push button.
PF6	SPI select 6, timer 6	Push button (SW7). See "LEDs and Push Buttons" on page 1-10 and "Push Button Enable Switch (SW4)" on page 2-12 for information on how to disable the push button.
PF7	SPI select 7, timer 7	Push button (SW8). See "LEDs and Push Buttons" on page 1-10 and "Push Button Enable Switch (SW4)" on page 2-12 for information on how to disable the push button.
PF8		Push button (SW9). See "LEDs and Push Buttons" on page 1-10 and "Push Button Enable Switch (SW4)" on page 2-12 for information on how to disable the push button.
PF9–12		Not used
PF13		ADV7183A video decoder's reset

Table 2-1. Programmable Flag Connections (Cont'd)

Processor PF Pin	Processor Function	EZ-KIT Lite Function
PF14		ADV7179 video encoder's reset
PF15		AD1836 codec's reset
PF16		SPORT0 transmit frame sync pin
PF17		SPORT0 transmit data secondary pin
PF18		SPORT0 transmit data primary pin
PF19		SPORT0 receive frame sync pin
PF20		SPORT0 receive data secondary pin
PF21		SPORT1 transmit frame pin
PF22		SPORT1 transmit data secondary pin
PF23		SPORT1 transmit data primary pin
PF24		SPORT1 receive frame sync pin
PF25		SPORT1 receive data secondary pin
PF26		UART transmit pin
PF27		UART receive pin
PF28		SPORT0 receive serial clock pin
PF29		SPORT0 transmit serial clock pin
PF30		SPORT1 receive serial clock pin
PF31		SPORT1 transmit serial clock pin
PF39–32	PPI 1 data 15–8	LED13–20
PF47–40	PPI 0 data 15–8	LED5–12

PPI Interfaces

The ADSP-BF561 processor employs two independent parallel peripheral interfaces (PPIs), PPI 0 and PPI 1. Each PPI interface is a half-duplex, bi-directional bus consisting of 16 bits of data, a dedicated input clock, and synchronization signals. The ADSP-BF561 EZ-KIT Lite board utilizes the PPI interfaces for video input and video output.

The PPI 0 interface is configured to input video data from the ADV7183A video decoder device: bits 7–0 connect to the video decoder’s data outputs. The PPI 1 interface is configured to output video data to the ADV7179 video encoder device: bits 7–0 connect to the video encoder’s data inputs.

Each PPI interface has a dedicated clock input configured independently by the SW5 switch. The clock source can be one of the following: 27 MHz crystal oscillator, ADV7183A video decoder’s clock output, or external clock from the expansion interface. See [“PPI Clock Select Switch \(SW5\)” on page 2-13](#) for more information about the switch.

The SW2 switch provides a flexible connection between dedicated synchronization IOs (SYNC1 and SYNC2 of each PPI interface) and the encoder’s and decoder’s horizontal and vertical synchronization pins. See [“Video Configuration Switch \(SW2\)” on page 2-10](#) for more information about the switch. For a detailed description of the ADSP-BF561 processor’s PPI interfaces, refer to the *ADSP-BF561 Blackfin Processor Hardware Reference*.

[Table 2-2](#) describes the PPI pins of the EZ-KIT Lite board.

Table 2-2. PPI Connections

Processor PPI Pin	Other Processor Function	EZ-KIT Lite Function
PPI 0 bits 7–0		ADV7183A data outputs P15–8
PPI 1 bits 7–0		ADV7179 data inputs P7–0
PPI 0 SYNC1	Timer 8	ADV7179 HSYNC. For more information, see “Video Configuration Switch (SW2)” on page 2-10 .

Table 2-2. PPI Connections (Cont'd)

Processor PPI Pin	Other Processor Function	EZ-KIT Lite Function
PPI 0 SYNC2	Timer 9	ADV7179 VSYNC. For more information, see “Video Configuration Switch (SW2)” on page 2-10.
PPI 0 clock		A choice of ADV7183A output clock, a local 27 MHz oscillator, or an external clock from ADSP-BF533/BF561 EZ-KIT Extender [®] board.
PPI 1 SYNC1	Timer 10	ADV7183A HSYNC. For more information, see “Video Configuration Switch (SW2)” on page 2-10.
PPI 1 SYNC2	Timer 11	ADV7183A VSYNC. For more information, see “Video Configuration Switch (SW2)” on page 2-10.
PPI 1 clock		A choice of ADV7183A output clock, a local 27 MHz oscillator, or an external clock from ADSP-BF53x/BF561 Blackfin EZ-Extender.

Video Output (PPI1)

The PPI 1 interface is configured as output and connects to the on-board video encoder device, ADV7179. The ADV7179 encoder generates three analog video channels on DAC A, DAC B, and DAC C. The PPI 1 bits 7–0 connect to P7–0 of the encoder’s pixel inputs. The encoder’s input clock is fixed and comes from an on-board 27 MHz oscillator.

The encoder’s synchronization signals, HSYNC and VSYNC, can be configured as inputs or outputs. Video blanking control signal is at level 1. The HSYNC and VSYNC signals can connect to SYNC1 and SYNC2 of the processor’s PPI 1 interface via the SW2 switch, as described in [“Video Configuration Switch \(SW2\)”](#) on page 2-10.

Video Input (PPI0)

The PPI0 interface is configured as input and connects to the on-board video decoder device, ADV7183A. The ADV7183A decoder receives three analog video channels on AI N1, AI N4, and AI N5 input. The decoder's pixel data outputs P15–8 drive the PPI0 inputs 8–0. The decoder's 27 MHz pixel clock output can be selected to drive any of the PPI clocks as shown in [Table 2-7 on page 2-13](#).

Synchronization outputs of the decoder, HS/HACTIVE, VS/VACTIVE, and FIELD can connect to the processor's PPI0_SYNC1, PPI0_SYNC2, and PF3 flag via the SW2 DIP switch, as described in [“Video Configuration Switch \(SW2\)” on page 2-10](#).

UART Port

The processor's universal asynchronous receiver/transmitter (UART) port connects to the ADM3202 RS-232 line driver as well as to the expansion interface. The RS-232 line driver is attached to the DB9 male connector, providing an interface to a personal computer and other serial devices.

Expansion Interface

The expansion interface consists of the three 90-pin connectors, J1–3. [Table 2-3](#) shows the interfaces each connector provides. For the exact pinout of the connectors, refer to [“ADSP-BF561 EZ-KIT Lite Schematic” on page B-1](#). The mechanical dimensions of the connectors can be obtained from [Technical or Customer Support](#).

Table 2-3. Connector Interfaces

Connector	Interfaces
J1	5V, GND, address, data, PPI 0 3–0, PF15–6, PF4
J2	3.3V, GND, SPI, NMI, PPI 0 SYNC3–1, SPORT0, SPORT1, PF15–0, EBUI control signals
J3	5V, 3.3V, GND, UART, PPI 1 15–0, reset, video control signals

Limits to the current and to the interface speed must be taken into consideration when using the expansion interface. The maximum current limit is dependent on the capabilities of the used regulator. Additional circuitry also can add extra loading to signals, decreasing their maximum effective speed.



Analog Devices does not support and is not responsible for the effects of additional circuitry.

JTAG Emulation Port

The JTAG emulation port allows an emulator to access internal and external memories of the processor through a 6-pin interface. The JTAG emulation port of the processor also connects to the USB debugging interface. When an emulator connects to the board at ZP4, the USB debugging interface is disabled. See “[JTAG \(ZP4\)](#)” on page 2-21 for more information about the JTAG connector.

To learn more about available emulators, contact Analog Devices (see “[Product Information](#)”).

Jumper and DIP Switch Settings

This section describes functionality of the jumpers and DIP switches. The jumper and DIP switch locations are shown in [Figure 2-2](#).

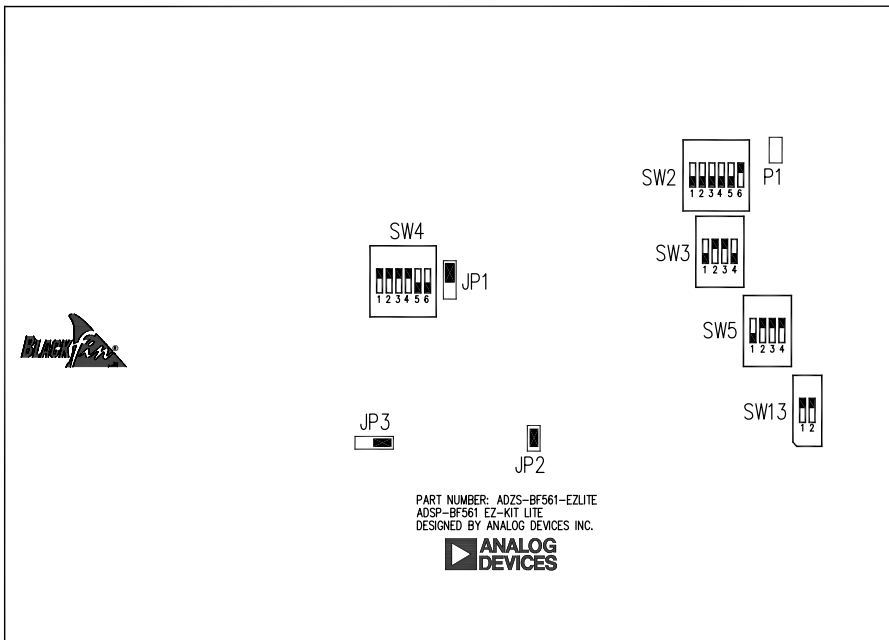


Figure 2-2. DIP Switch Locations

Video Configuration Switch (SW2)

The video configuration switch (SW2) determines how some video signals from the ADV7183A video decoder and ADV7179 video encoder are routed to the processor's PPIs. The switch also determines if the PF2 pin controls the \sim OE signal of the ADV7183A video decoder outputs. See [Table 2-4](#).

Table 2-4. Video Configuration Switch (SW2)

Switch Position (Default)	Processor Signal	Video Signal
1 (OFF)	PPI 1 SYNC1	ADV7179
2 (OFF)	PPI 0 SYNC1	ADV7183A
3 (OFF)	PPI 1 SYNC2	ADV7183A
4 (OFF)	PPI 1 SYNC2	ADV7179
5 (OFF)	PF3 (FI ELD)	ADV7183A
6 (ON)	PF2	ADV7183A

Positions 1 through 5 of SW2 determine how and if the SYNC1, SYNC2, and FI ELD control signals of the PPI 0 and PPI 1 interfaces are routed to the processor's PPIs. In standard configuration of the encoder and decoder, this is not necessary because the processor is capable of reading the control information embedded in the data stream.

Position 6 of SW2 determines whether PF2 connects to the -OE signal of the ADV7183A device. When the switch is OFF, PF2 can be used for other operations, and the decoder output enable is held high with a pull-up resistor.

Boot Mode Switch (SW3)

Positions 1 and 2 of the SW3 switch set the boot mode of the processor, as described in [Table 2-5](#). Position 3 sets the processor's PLL on boot—when the position is ON, the PLL is in bypass.

Table 2-5. Boot Mode Select Switch (SW3)

Position 1 BMODE0	Position 2 BMODE1	Boot Mode
ON	ON	Reserved
OFF	ON	Flash memory (default)

Jumper and DIP Switch Settings

Table 2-5. Boot Mode Select Switch (SW3) (Cont'd)

Position 1 BMODE0	Position 2 BMODE1	Boot Mode
ON	OFF	8-bit SPI PROM
OFF	OFF	16-bit SPI PROM

Push Button Enable Switch (SW4)

Positions 1 through 4 of the push button enable switch (SW4) allow to disconnect the drivers associated with the push buttons from the PF pins of the processor. Positions 5 and 6 connect the transmit and receive frame syncs and clocks of SPORT0. This is important when the AD1836A audio codec and the processor are communicating in 2-wire interface (TWI) mode. [Table 2-6](#) shows which PF is driven when the switch is ON.

Table 2-6. Push Button Enable Switch (SW4)

Switch Position	Default Setting	Pin #	Signal (Side 1)	Pin #	Signal (Side 2)
1	ON	1	SW6	12	PF5
2	ON	2	SW7	11	PF6
3	ON	3	SW8	10	PF7
4	ON	4	SW9	9	PF8
5	OFF	5	TFS0	8	RFS0
6	OFF	6	RSCLK0	7	TSCLK0

PPI Clock Select Switch (SW5)

The SW5 switch controls a clock selection of the PPI interfaces as described in [Table 2-7](#) and [Table 2-8](#).

Table 2-7. PPICLK1 Clock Source Setup

SW5 Position 1 PPI0_CKSEL0	SW5 Position 2 PPI0_CKSEL1	PPiCLK1 Source
ON	ON	27 MHz oscillator (default)
OFF	ON	ADV7183 clock out
X	OFF	Expansion interface

Table 2-8. PPICLK2 Clock Source Setup

SW5 Position 3 PPI1_CKSEL0	SW5 Position 4 PPI1_CKSEL1	PPiCLK2 Source
ON	ON	27 MHz oscillator (default)
OFF	ON	ADV7183 clock out
X	OFF	Expansion interface

Test DIP Switches (SW10 and SW11)

Two DIP switches (SW10 and SW11) are located on the bottom of the board. The switches are used only for testing and should remain in the OFF position.

Audio Enable Switch (SW12)

The audio enable switch (SW12) disconnects the audio signals from the processor. The default is all positions ON.

Jumper and DIP Switch Settings

SPIS1/SPISS Select (SW13)

The SPI S1/SPI SS select switch (SW13) disconnects the SPI S1 and SPI SS signals from the board, making them available on the SPI connector (P5). The default is the ON position.

Video Encoder Clock Select Jumper (JP1)

The video encoder clock select jumper (JP1) determines the source of the ADV7179 video encoder's clock. The jumper setting is shown in [Table 2-9](#).

Table 2-9. Video Encoder Clock Select Jumper (JP1)

JP1 Position	Mode
1 and 2	Input clock for encoder is generated from 27 MHz oscillator (default)
2 and 3	Input clock for encoder is generated from output clock of decoder. This is used when synchronizing the encoder and decoder clock is required.

VDDINT Select Jumpers (JP2 and JP3)

The processor internal voltage (VDDINT) select jumpers (JP2–3) determine the source of the processor's internal voltage. For the core clock set at 533 MHz and higher, select the on-board external regulator for VDDINT. The jumper settings are shown in [Table 2-10](#).

Table 2-10. Processor Internal Voltage Select Jumpers (JP2 and JP3)

JP2	JP3	VDDINT Source
Not populated	1 and 2 ON	Provided by the on-board external regulator
Populated	2 and 3 ON	Provided by the processor through the VROUT pins (internal regulator)

UART Loop Jumper (P1)

The UART loop jumper (P1) is for looping the transmit and receive signals. The default is the OFF position.

LEDs and Push Buttons

This section describes functionality of the LEDs and push buttons. [Figure 2-3](#) shows the locations of the LEDs and push buttons.

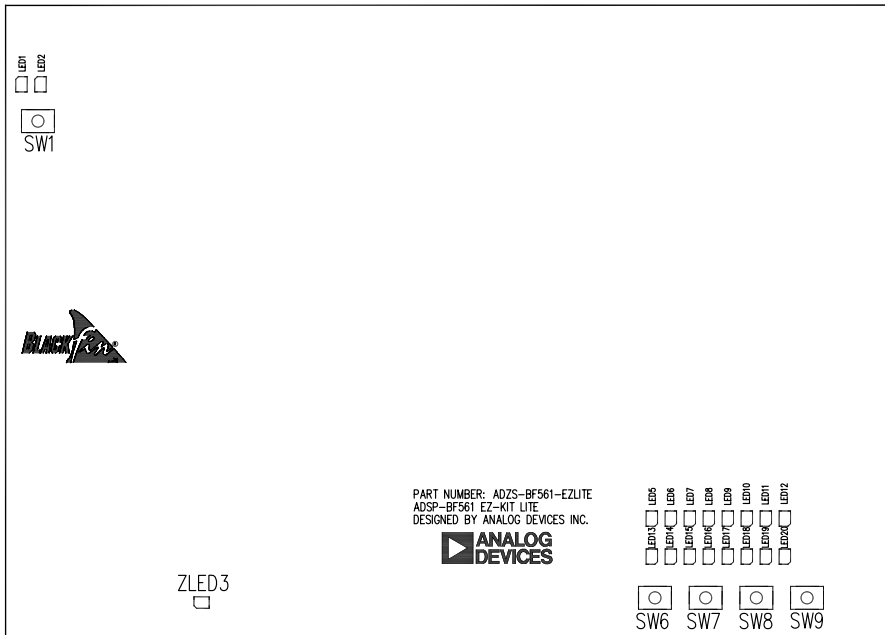


Figure 2-3. LED and Push Button Locations

Reset Push Button (SW1)

The `RESET` push button resets all of the ICs on the board. One exception is the USB interface chip (U34). The chip is not being reset when the push button is pressed after the USB cable has been plugged in and communication with the PC has been initialized correctly. Once communication is initialized, the only way to reset the USB is by powering down the board.

Programmable Flag Push Buttons (SW6–9)

Four push buttons, SW6–9, are provided for general-purpose user input. The buttons connect to the programmable flag pins of the processor (PF5–8). The push buttons are active high and, when pressed, send a high (1) to the processor. Refer to [“LEDs and Push Buttons” on page 1-10](#) for more information on how to use PFs when programming the processor. The push button enable switch (SW4) is capable of disconnecting the push buttons from its associated PF (refer to [“Push Button Enable Switch \(SW4\)” on page 2-12](#)). The programmable flag pins and corresponding switches are shown in [Table 2-11](#).

Table 2-11. Programmable Flag Switches

Processor Programmable Flag Pin	Push Button Reference Designator
PF5	SW6
PF6	SW7
PF7	SW8
PF8	SW9

Power LED (LED1)


When `LED1` is lit (green), it indicates that power is being supplied to the board properly.

Reset LED (LED2)

When LED2 is lit, it indicates that the master reset of all major ICs is active.

USB Monitor LED (ZLED3)

The USB monitor LED (ZLED3) indicates that USB communication has been initialized successfully and you can connect to the processor using a VisualDSP++ EZ-KIT Lite session. This takes approximately 15 seconds. If the LED does not light, try cycling power on the board and/or reinstalling the USB driver.

 When VisualDSP++ is actively communicating with the EZ-KIT Lite target board, the LED can flicker, indicating communications handshake.

User LEDs (LED5–12, LED13–20)

Sixteen LEDs connect to the processor's programmable flags. Eight LEDs labeled LED5 through LED12 are controlled by programmable flags PF40 through PF47 (equivalent to PPI 0_D15–8). Eight LEDs labeled LED13 through LED20 are controlled by programmable flags PF32 through PF39 (equivalent to PPI 1_D15–8). To learn how to use the LEDs, refer to [“LEDs and Push Buttons” on page 1-10](#).

Table 2-12. User LEDs

LED Reference Designator	Flag Port Name	LED Reference Designator	Flag Port Name
LED5	PB40	LED13	PB32
LED6	PB41	LED14	PB33
LED7	PB42	LED15	PB34
LED8	PB43	LED16	PB35

Connectors

Table 2-12. User LEDs (Cont'd)

LED Reference Designator	Flag Port Name	LED Reference Designator	Flag Port Name
LED9	PB44	LED17	PB36
LED10	PB45	LED18	PB37
LED11	PB46	LED19	PB38
LED12	PB47	LED20	PB39

Connectors

This section describes the connector functionality and provides information about mating connectors. The connector locations are shown in [Figure 2-4](#).

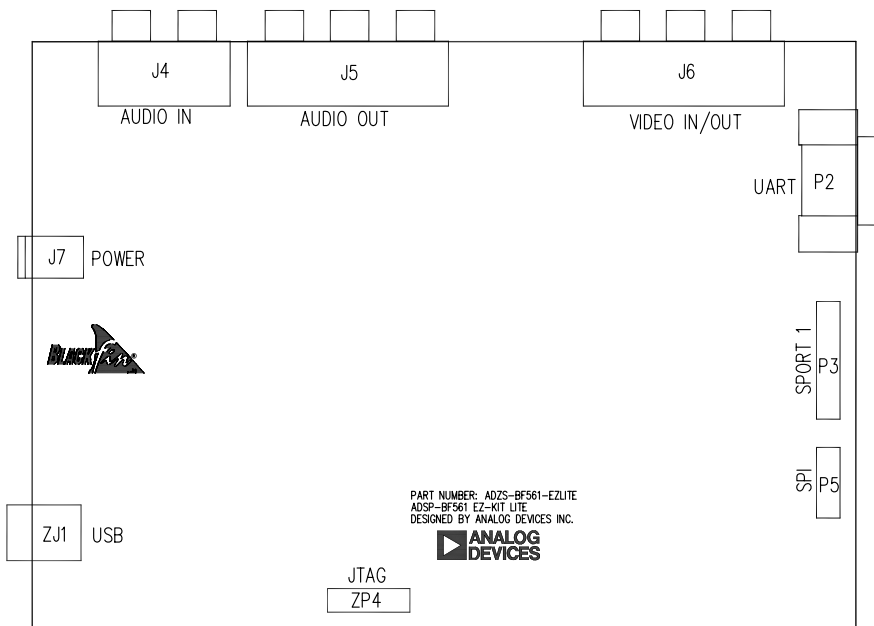


Figure 2-4. Connector Locations

Expansion Interface (J1–3)

Three board-to-board connector footprints provide signals for most of the processor’s peripheral interfaces. The connectors are located at the bottom of the board. For more information about the interface, see [“Expansion Interface” on page 2-8](#). For the availability and pricing of the J1, J2, and J3 connectors, contact Samtec.

Part Description	Manufacturer	Part Number
90-position 0.05" spacing, SMT (J1, J2, J3)	SAMTEC	SFC-145-T2-F-D-A
Mating Connector		
90-position 0.05" spacing (through hole)	SAMTEC	TFM-145-x1 series
90-position 0.05" spacing (surface mount)	SAMTEC	TFM-145-x2 series
90-position 0.05" spacing (low cost)	SAMTEC	TFC-145 series

Audio (J4 and J5)

Part Description	Manufacturer	Part Number
2x2 RCA jacks (J4)	SWITCHCRAFT	PJRS2X2S01X
3x2 RCA jacks (J5)	SWITCHCRAFT	PJRS3X2S01X
Mating Connector		
Two channel RCA interconnect cable	MONSTER CABLE	BI100-1M

Video (J6)

Part Description	Manufacturer	Part Number
3x2 RCA jacks (J6)	SWITCHCRAFT	PJRS3X2S01X

Connectors

Power (J7)

The power connector provides all of the power necessary to operate the EZ-KIT Lite board.

Part Description	Manufacturer	Part Number
2.5 mm power jack (J7)	SWITCHCRAFT	RAPC712X
Mating Power Supply (shipped with EZ-KIT Lite)		
7V power supply	CUI INC.	DMS070214-P6P-SZ

The power connector supplies DC power to the EZ-KIT Lite board.

RS-232 (P2)

The RS-232 compatible connector is described in [Table 2-13](#).

Table 2-13. RS-232 Connector

Part Description	Manufacturer	Part Number
DB9, male, right angle (P2)	TYCO	5747250-4
Mating Assembly		
2m female-to-female cable	DIGI-KEY	AE1016-ND

SPORT1 (P3)

The SPORT1 connector is linked to a 20-pin connector. The connector's pinout can be found in "[ADSP-BF561 EZ-KIT Lite Schematic](#)" on [page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	FCI	68737-420HLF
Mating Connectors		
IDC socket	DIGI-KEY	S4210-ND



SPI (P5)

The SPI connector is linked to a 12-pin connector. The connector's pinout can be found in [“ADSP-BF561 EZ-KIT Lite Schematic” on page B-1](#).

Part Description	Manufacturer	Part Number
IDC header	SULLINS	GEC06DAAN
Mating Assembly		
IDC socket	DIGI-KEY	S4207-ND

JTAG (ZP4)

The JTAG header is the connecting point for a JTAG in-circuit emulator pod. When an emulator connects to the JTAG header, the USB debug interface is disabled.

-  Pin 3 is missing to provide keying. Pin 3 in the mating connector should have a plug.
-  When using an emulator with the EZ-KIT Lite board, follow the connection instructions provided with the emulator.

Connectors

A ADSP-BF561 EZ-KIT LITE BILL OF MATERIALS

The bill of materials corresponds to “[ADSP-BF561 EZ-KIT Lite Schematic](#)” on page B-1.

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
1	1	74LVC14A SOIC14	U47	TI	74LVC14AD
2	2	IDT74FCT3244A PY SSOP20	U13,U30	IDT	IDT74FCT3244APYG
3	1	12.288MHZ OSC003	U16	EPSON	SG-8002CA MP
4	1	NDS8434A SO-8	U29	FAIRCHILD	NDS8434A
5	2	MT48LC16M16A 2TG-75 TSOP54	U32-33	MICRON	MT48LC16M16A2P-75
6	1	27MHZ OSC003	U17	EPSON	SG-8002CA MP
7	2	IDT2305-1DC SOIC8	U19-20	INTE- GRATED SYS	ICS9112AM-16LFT
8	1	SN74LVC1G32 SOT23-5	U10	TI	SN74LVC1G32DBVR
9	1	30MHZ OSC003	U14	EPSON	SG-8002CA MP
10	1	BF561 M29W640D "U27"	U27	ST MICRO	M29W640DT 90N6E
11	2	FDC658P SOT23-6	U28,U49	FAIRCHILD	FDC658P
12	1	ADM708SARZ SOIC8	U46	ANALOG DEVICES	ADM708SARZ

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
13	1	ADP3338AKCZ-33 SOT-223	VR3	ANALOG DEVICES	ADP3338AKCZ-3.3-RL
14	1	ADP3339AKCZ-5 SOT-223	VR1	ANALOG DEVICES	ADP3339AKCZ-5-R7
15	1	ADP3336ARMZ MSOP8	VR2	ANALOG DEVICES	ADP3336ARMZ-REEL7
16	1	10MA AD1580BRTZ SOT23D	D1	ANALOG DEVICES	AD1580BRTZ-REEL7
17	4	ADG752BRTZ SOT23-6	U22-23,U25-26	ANALOG DEVICES	ADG752BRTZ-REEL
18	3	AD8061ARTZ SOT23-5	U1-3	ANALOG DEVICES	AD8061ARTZ-R2
19	1	ADM3202ARNZ SOIC16	U21	ANALOG DEVICES	ADM3202ARNZ
20	8	AD8606ARZ SOIC8	U5-7,U9,U11-12,U18,U24	ANALOG DEVICES	AD8606ARZ
21	1	AD1836AASZ MQFP52	U15	ANALOG DEVICES	AD1836AASZ
22	1	ADSP-BF561SKBCZ MBGA256	U48	ANALOG DEVICES	ADSP-BF561SKBCZ-6V
23	1	ADV7179KCPZ LFCSP40	U8	ANALOG DEVICES	ADV7179KCPZ
24	1	ADV7183BKSTZ LQFP80	U4	ANALOG DEVICES	ADV7183BKSTZ
25	2	ADP1864AUJZ SOT23-6	VR5-6	ANALOG DEVICES	ADP1864AUJZ-R7
26	5	RUBBER FOOT	M1-5	MOUSER	517-SJ-5018BK
27	1	PWR 2.5MM_JACK CON005	J7	SWITCH-CRAFT	RAPC712X

ADSP-BF561 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
28	1	RCA 2X2 CON013	J4	SWITCH- CRAFT	PJRS2X2S01X
29	5	MOMENTARY SWT013	SW1,SW6-9	PANASONIC	EVQ-PAD04M
30	3	.05 45X2 CON019	J1-3	SAMTEC	SFC-145-T2-F-D-A
31	3	DIP6 SWT017	SW2,SW4,SW10	CTS	218-6LPST
32	2	RCA 3X2 CON024	J5-6	SWITCH- CRAFT	PJRS3X2S01X
33	4	DIP4 SWT018	SW3,SW5,SW11-12	ITT	TDA04HOSB1
34	1	DIP2 SWT020	SW13	C&K	CKN9064-ND
35	1	IDC 2X1 IDC2X1	P1	FCI	90726-402HLF
36	1	IDC 2X1 IDC2X1	JP2	FCI	90726-402HLF
37	2	IDC 3X1 IDC3X1	JP1,JP3	FCI	90726-403HLF
38	1	IDC 10X2 IDC10X2	P3	BURG-FCI	54102-T08-10LF
39	4	IDC 2PIN_JUMPER_ SHORT	SJ1-4	DIGI-KEY	S9001-ND
40	1	DB9 9PIN DB9M	P2	TYCO	5747250-4
41	1	IDC 6X2 IDC6X2	P5	FCI	68737-412HLF
42	1	5A RESETABLE FUS005	F1	MOUSER	650-RGEF500
43	14	0 1/4W 5% 1206	R43-44,R55,R71, R73,R83,R133,R159, R163,R223-225, R247,R257	KOA	0.0ECTRk7372 BTTED

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
44	16	YELLOW LED001	LED5-20	PANASONIC	LN1461C
45	12	330PF 50V 5% 0805	C82,C84,C86, C92-100	AVX	08055A331JAT
46	48	0.01UF 100V 10% 0805	C3,C5,C28,C41,C49, C69-70,C74-75, C101,C112-114, C127,C134,C136- 138,C140-141,C146, C149-150,C154, C156-157,C165-166, C168,C173-174, C176,C181-182, C185-188,C190, C192-194,C200-203, C249,C256	AVX	08051C103KAT2A
47	8	0.22UF 25V 10% 0805	C104,C106-108, C125,C129,C143, C162	AVX	08053C224KAT2A
48	69	0.1UF 50V 10% 0805	C1-2,C4,C12,C19- 20,C22,C27,C29-30, C35,C37,C48,C51- 52,C54-60,C65-66, C71,C73,C83,C85, C87-91,C102,C109- 111,C115,C122-124, C126,C131-132, C135,C139,C145, C147-148,C151-152, C155,C158-159, C164,C167,C171- 172,C175,C177-179, C183-184,C189, C191,C196, C198-199	AVX	08055C104KAT
49	10	1000PF 50V 5% 0805	C23,C25,C33,C36, C38-40,C67-68,C133	AVX	08055A102JAT2A

ADSP-BF561 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
50	3	10UF 16V 10% C	CT17,CT23-24	SPRAGUE	293D106X9016C2TE 3
51	43	10K 1/10W 5% 0805	R2,R7,R11-12,R14, R24,R42,R45-47, R52,R57,R85,R87- 88,R98,R131,R143, R158,R160-162, R167-170,R174-177, R181-183,R189-190, R196,R229,R239, R246,R248-251	VISHAY	CRCW080510K0 JNEA
52	9	33 1/10W 5% 0805	R39,R41,R59-61, R165-166,R171-172	VISHAY	CRCW080533R0 JNEA
53	2	4.7K 1/10W 5% 0805	R86,R90	VISHAY	CRCW08054K70 JNEA
54	1	1.5K 1/10W 5% 0805	R1	VISHAY	CRCW08051K50 FKEA
55	1	1.2K 1/8W 5% 1206	R23	VISHAY	CRCW12061K20 JNEA
56	6	49.9K 1/8W 1% 1206	R108-113	VISHAY	CRCW120649K9 FKEA
57	12	100PF 100V 5% 1206	C6-11,C26,C34,C61- 63,C72	AVX	12061A101JAT2A
58	6	10UF 16V 10% B	CT1-4,CT15-16	AVX	TAJB106K016R
59	4	100 1/10W 5% 0805	R242-245	VISHAY	CRCW0805100 RJNEA
60	6	220PF 50V 10% 1206	C13-18	AVX	12061A221JAT2A
61	4	600 100MHZ 200MA 0603	FER18-21	DIGI-KEY	490-1014-2-ND
62	1	2A S2A DO-214AA	D7	VISHAY	S2A-E3

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
63	12	600 100MHZ 500MA 1206	FER2-4,FER6,FER8- 12,FER14-16	STEWARD	HZ1206B601R-10
64	4	237.0 1/8W 1% 1206	R25-26,R53-54	VISHAY	CRCW1206237 RFKEA
65	4	750.0K 1/8W 1% 1206	R132,R156,R164, R173	VISHAY	CRCW1206750 KFKEA
66	16	5.76K 1/8W 1% 1206	R8,R15-16,R40,R49- 50,R58,R62-64,R69- 70,R121-124	VISHAY	CRCW12065K76 FKEA
67	6	11.0K 1/8W 1% 1206	R144-149	VISHAY	CRCW120611K0 FKEA
68	8	120PF 50V 5% 1206	C103,C105,C128, C130,C142,C144, C161,C163	AVX	12065A121JAT2A
69	12	75 1/8W 5% 1206	R4-6,R100-102, R104-105,R107, R114,R134-135	VISHAY	CRCW120675R0 JNEA
70	1	68UF 6.3V 20% D	CT22	AVX	TAJD686K016R
71	6	680PF 50V 1% 0805	C116-121	AVX	08055A681FAT2A
72	5	10UF 25V +80-20% 1210	C31,C47,C50,C195, C197	DIGI-KEY	587-1393-2-ND
73	6	2.74K 1/8W 1% 1206	R150-155	VISHAY	CRCW12062K74 FKEA
74	12	5.49K 1/8W 1% 1206	R17-22,R27,R30-31, R34-35,R38	VISHAY	CRCW12065K49 FKEA
75	6	3.32K 1/8W 1% 1206	R137-142	VISHAY	CRCW12063K32 FKEA
76	6	1.65K 1/8W 1% 1206	R28-29,R32-33,R36- 37	VISHAY	CRCW12061K65 FKEA
77	10	10UF 16V 20% CAP002	CT5-14	PANASONIC	EEE1CA100SR

ADSP-BF561 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
78	1	10UH 20% IND001	L11	TDK	445-2014-1-ND
79	6	0 1/10W 5% 0805	R66,R99,R103,R106, R178,R192	VISHAY	CRCW08050000 Z0EA
80	1	190 100MHZ 5A FER002	FER22	MURATA	DLW5BSN191SQ2
81	4	22 1/10W 5% 0805	R67-68,R187-188	VISHAY	541-22ATR-ND
82	6	0.68UH 10% 0805	L1-4,L6,L8	MURATA	LQM21NNR68K10D
83	1	.082UF 50V 5% 0805	C64	AVX	08055C823JAT2A
84	1	1A ZHCS1000 SOT23-312	D5	ZETEX	ZHCS1000TA pb-free
85	3	2.2UH 10% 0805	L5,L7,L9	DIGI-KEY	490-1119-2-ND
86	3	1UF 10V 10% 0805	C21,C24,C32	AVX	0805ZC105KAT2A
87	1	76.8K 1/10W 1% 1206	R48	VISHAY	CRCW120676K8 FKEA
88	1	147.0K 1/10W 1% 1206	R56	VISHAY	CRCW1206147 KFKEA
89	10	10 62.5MW 5% RNS006	RN1,RN4-12	PANASONIC	EXB-38V100JV
90	2	68PF 50V 5% 0603	C160,C257	AVX	06035A680JAT2A
91	2	470PF 50V 5% 0603	C153,C258	AVX	06033A471JAT2A
92	2	0 1/10W 5% 0603	R74,R254	PHYCOMP	232270296001L
93	2	24.9K 1/10W 1% 0603	R72,R256	DIGI-KEY	311-24.9KHTR-ND

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
94	2	10UF 16V 10% 1210	C169,C260	AVX	1210YD106KAT2A
95	1	680 1/8W 5% 1206	R119	VISHAY	CRCW1206680RFNE A
96	1	150.0 1/8W 1% 1206	R3	VISHAY	CRCW1206150RFKE A
97	1	GREEN LED001	LED1	PANASONIC	LN1361CTR
98	1	RED LED001	LED2	PANASONIC	LN1261CTR
99	2	1000PF 50V 5% 1206	C43,C46	AVX	12065A102JAT2A
100	6	2200PF 50V 5% 1206	C76-81	AVX	12065A222JAT050
101	6	1K 1/8W 5% 1206	R10,R115-118,R136	VISHAY	CRCW12061K00 FKEA
102	2	100K 1/8W 5% 1206	R9,R13	VISHAY	CRCW1206100K FKEA
103	17	270 1/8W 5% 1206	R120,R213-220, R230-237	VISHAY	CRCW1206270 RJNEA
104	6	604.0 1/8W 1% 1206	R125-130	VISHAY	CRCW1206604R FKEA
105	4	1UF 20V 20% A	CT25-28	AVX	TAJA105K020R
106	1	255.0K 1/10W 1% 0603	R89	VISHAY	CRCW06032553FK
107	2	80.6K 1/10W 1% 0603	R80,R255	DIGI-KEY	311-80.6KHRCT-ND
108	2	6.8UH 25% IND009	L10,L12	DIGI-KEY	308-1328-1-ND
109	2	4A SSB43L DO-214AA	D4,D8	VISHAY	SSB43L

ADSP-BF561 EZ-KIT Lite Bill Of Materials

Ref.	Qty.	Description	Reference Designator	Manufacturer	Part Number
110	2	5A MBRS540T3G SMC	D2-3	ON SEMI	MBRS540T3G
111	1	0.027 1/2W 1% 1206	R79	SUSUMU	RL1632T-R027-F-N
112	1	54.9K 1/10W 1% 0603	R252	VISHAY	CRCW060354K9 FKEA
113	1	0.047 1/2W 1% 1206	R253	SUSUMU	RL1632S-R047-F
114	2	100UF 6.3V 20%C	CT19,CT29	SANYO	6TPB100MC


A

B

C

D

ADSP-BF561 EZ-KIT Lite Schematic


		ANALOG DEVICES	20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD
Title		ADSP-BF561 EZ-KIT LITE TITLE	
Size C	Board No.	A0185-2003	Rev 2.3
Date	11-7-2007_15:11	Sheet	1 of 14

A

B

C


D

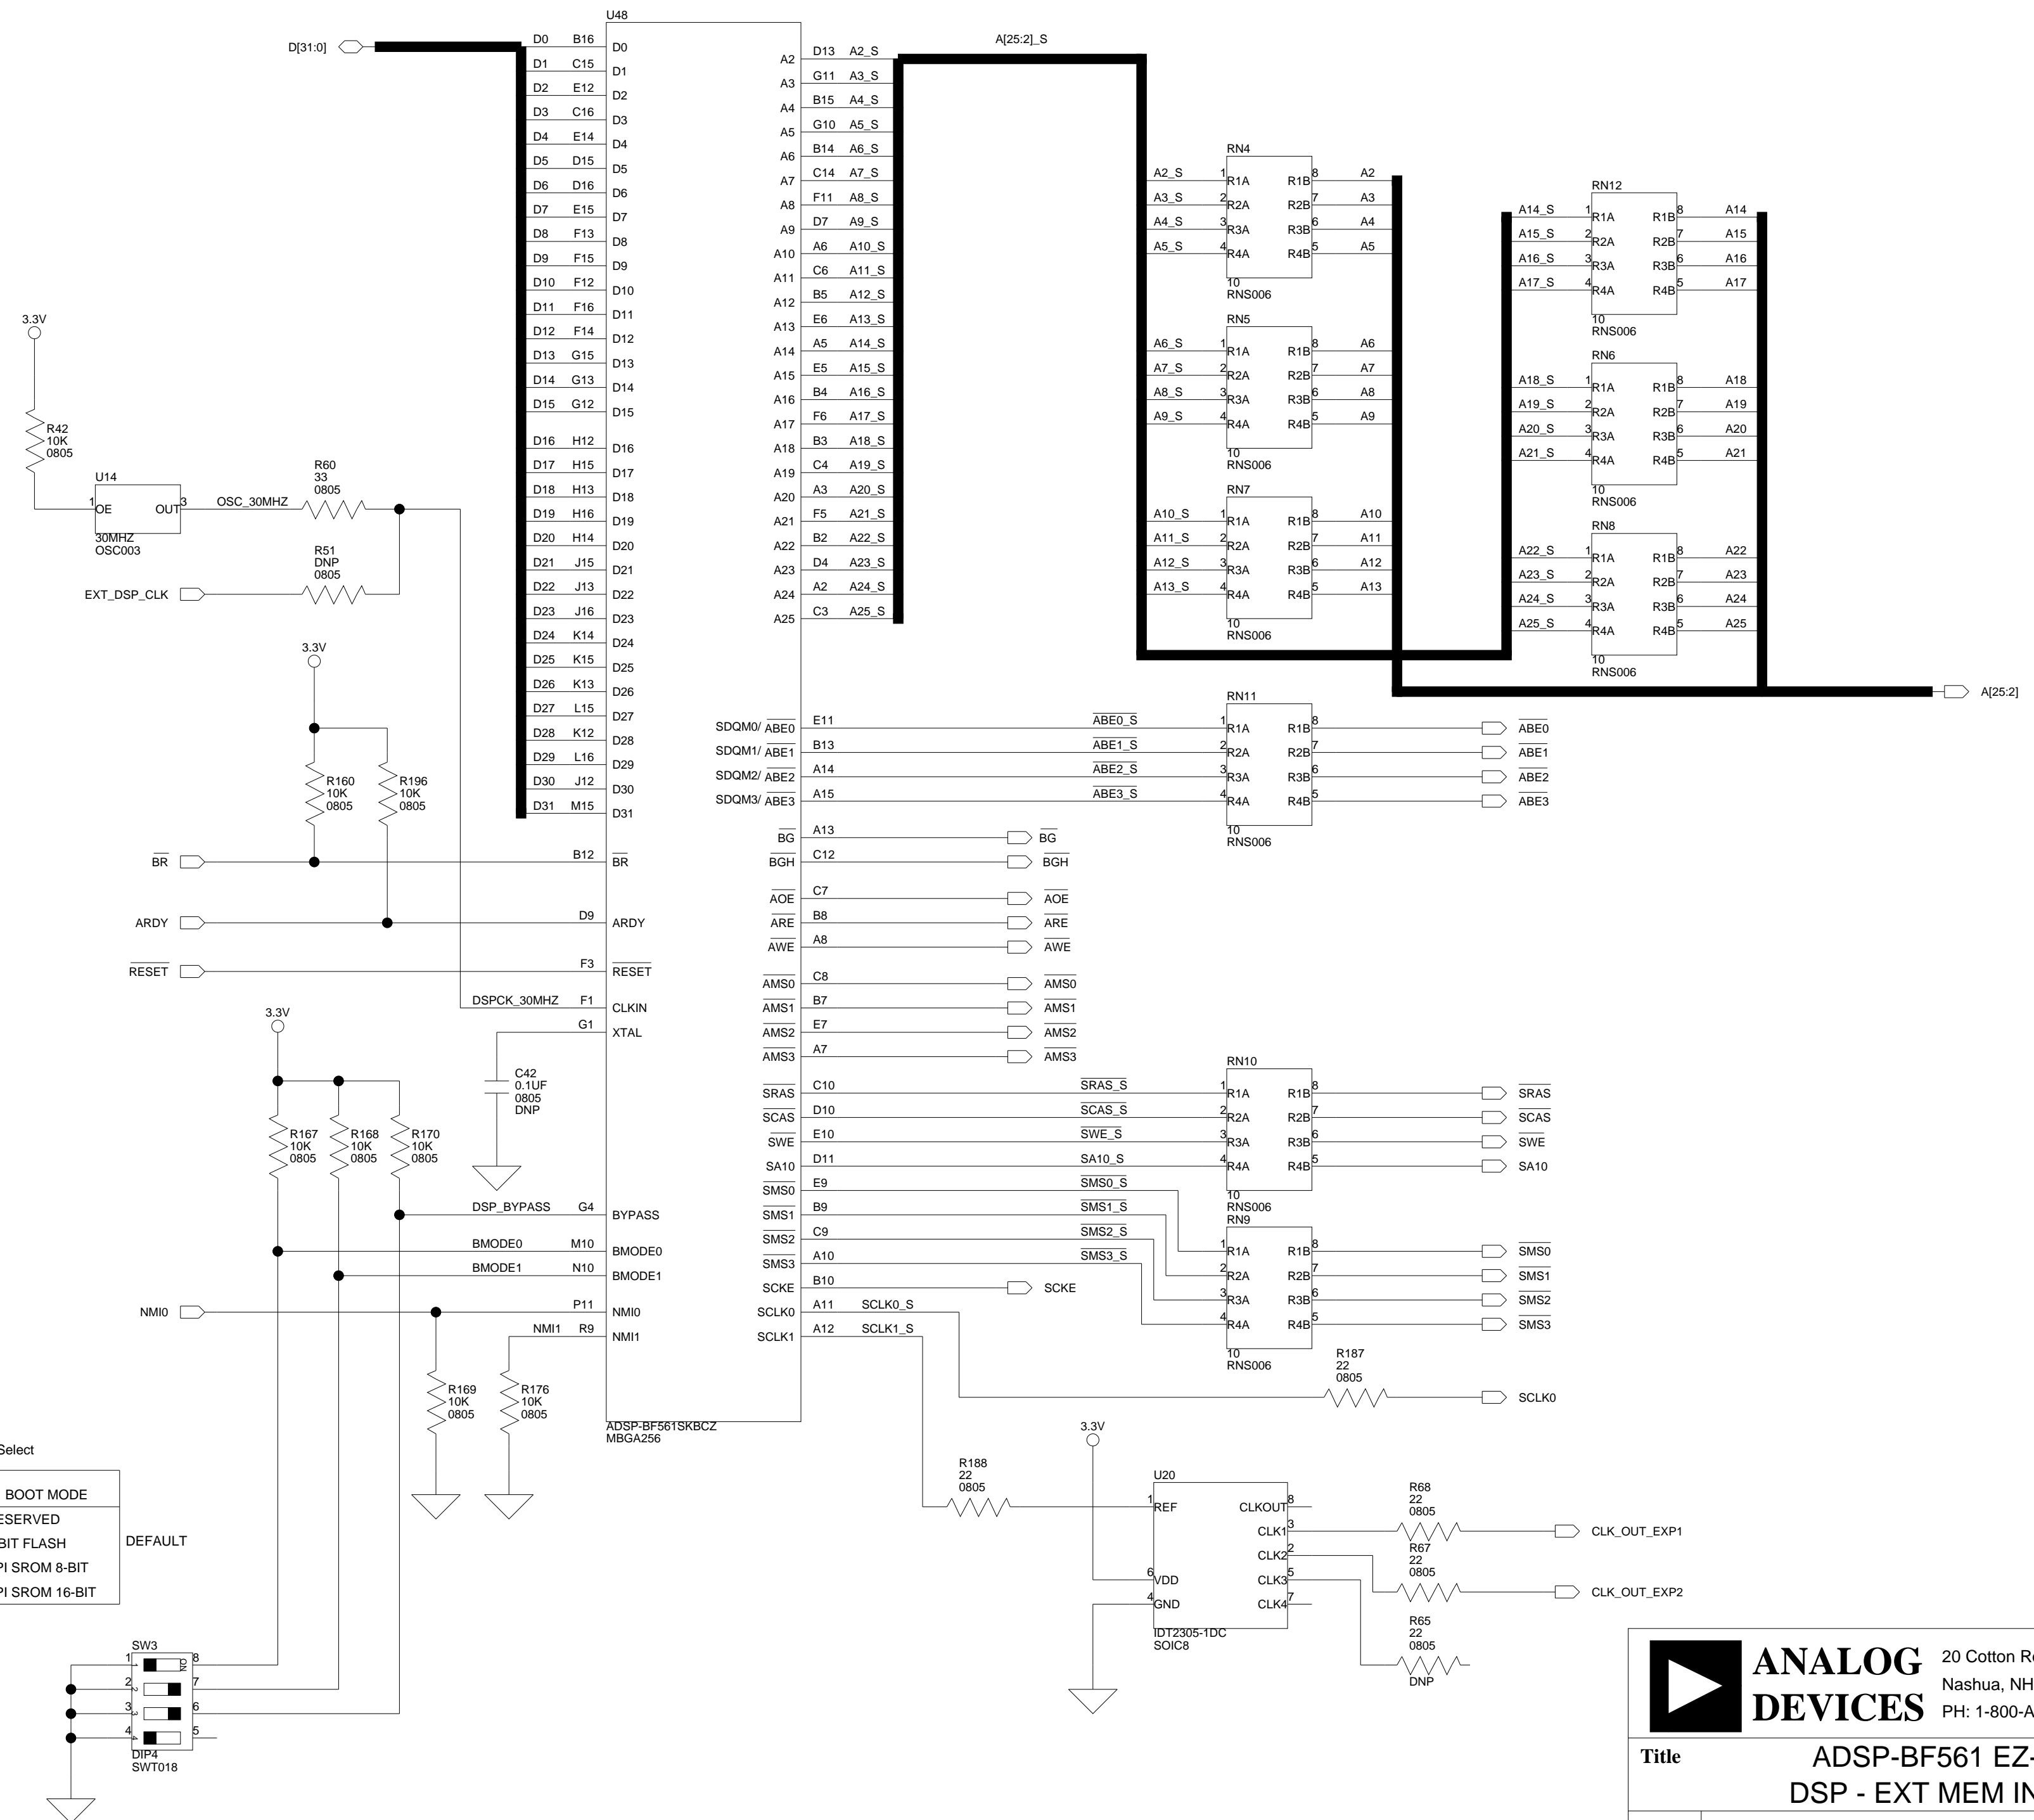

SW3: BOOT MODE/BYPASS Select
(Default = OFF, ON, ON, OFF)

1	2	BOOT MODE
BMODE0	BMODE1	
ON	ON	RESERVED
OFF	ON	8-BIT FLASH
ON	OFF	SPI SROM 8-BIT
OFF	OFF	SPI SROM 16-BIT

DEFAULT




ANALOG DEVICES

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD



Title		
ADSP-BF561 EZ-KIT LITE DSP - EXT MEM INTERFACE		
Size C	Board No.	Rev
	A0185-2003	2.3
Date	11-7-2007_15:11	Sheet 2 of 14

When designing your JTAG interface please refer to the Engineer to Engineer Note EE-68 which can be found at <http://www.analog.com>


All USB interface circuitry is considered proprietary and has been omitted from this schematic.

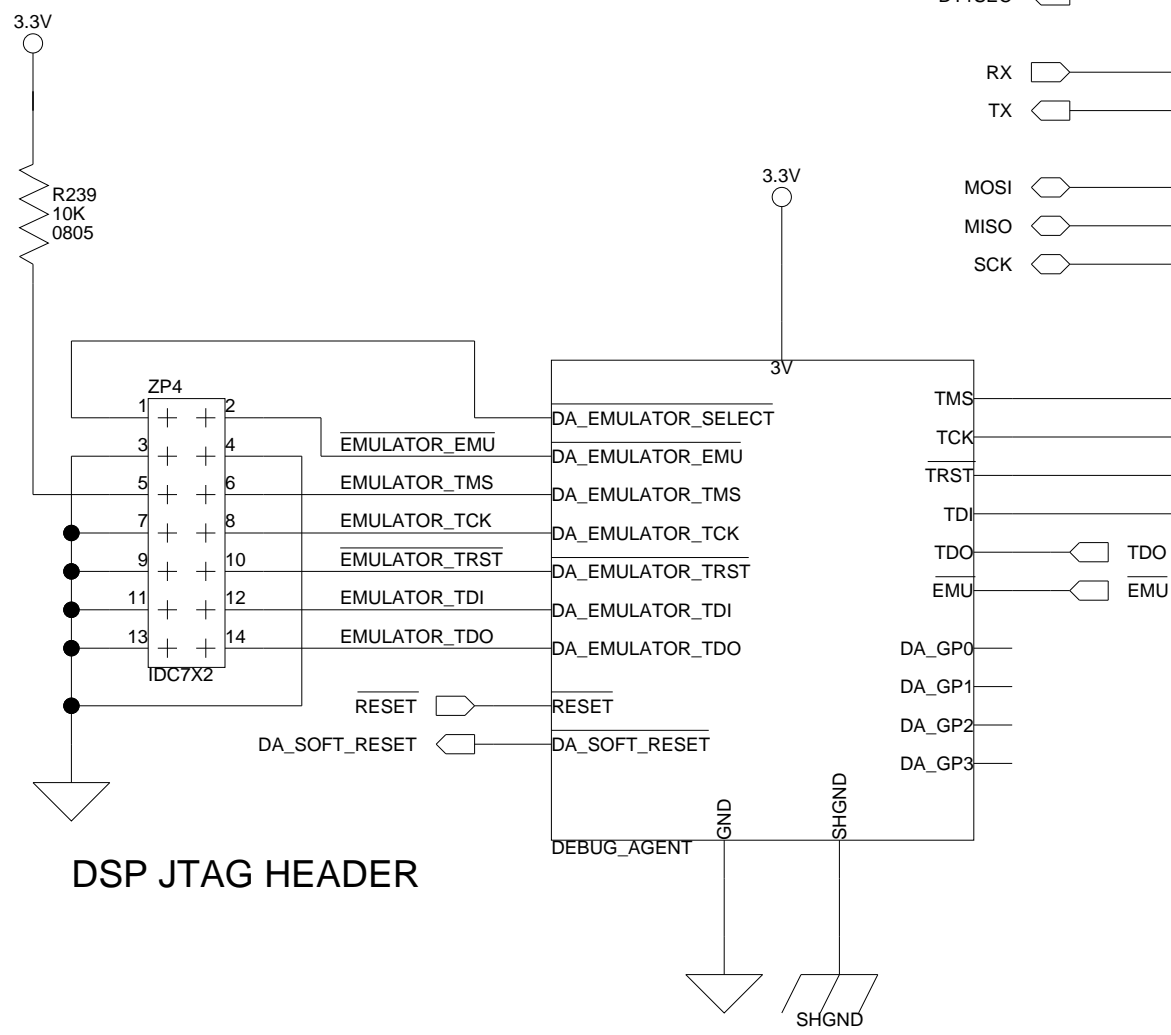



DSP JTAG HEADER

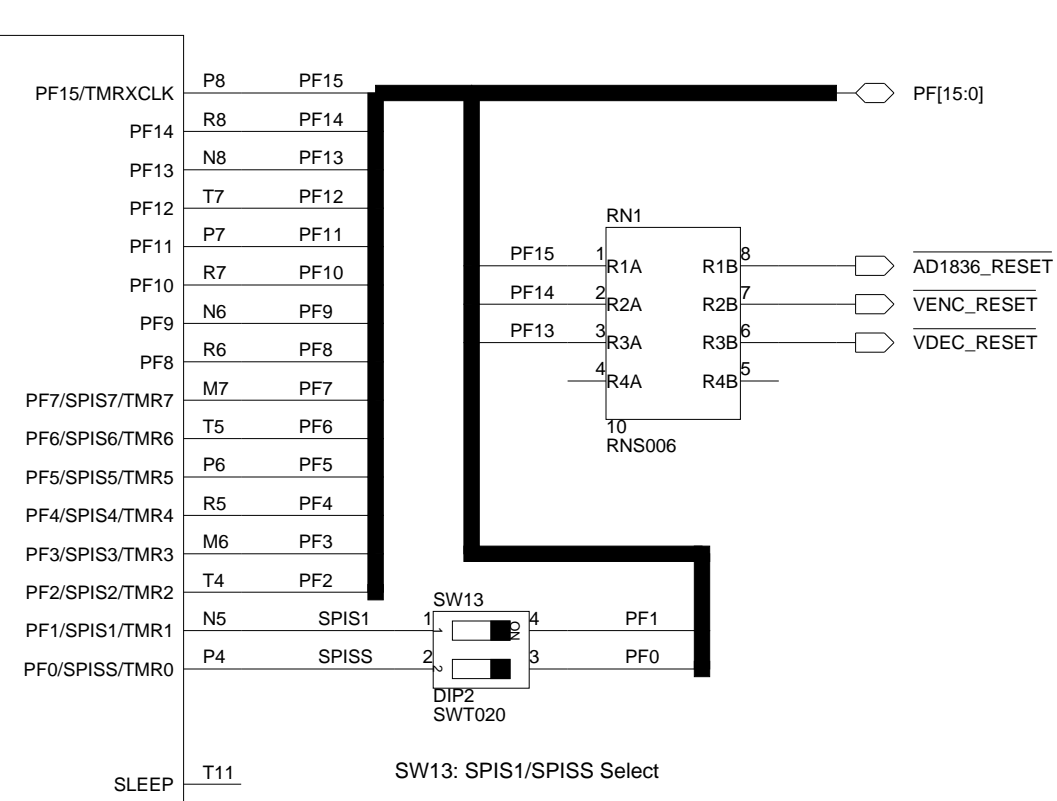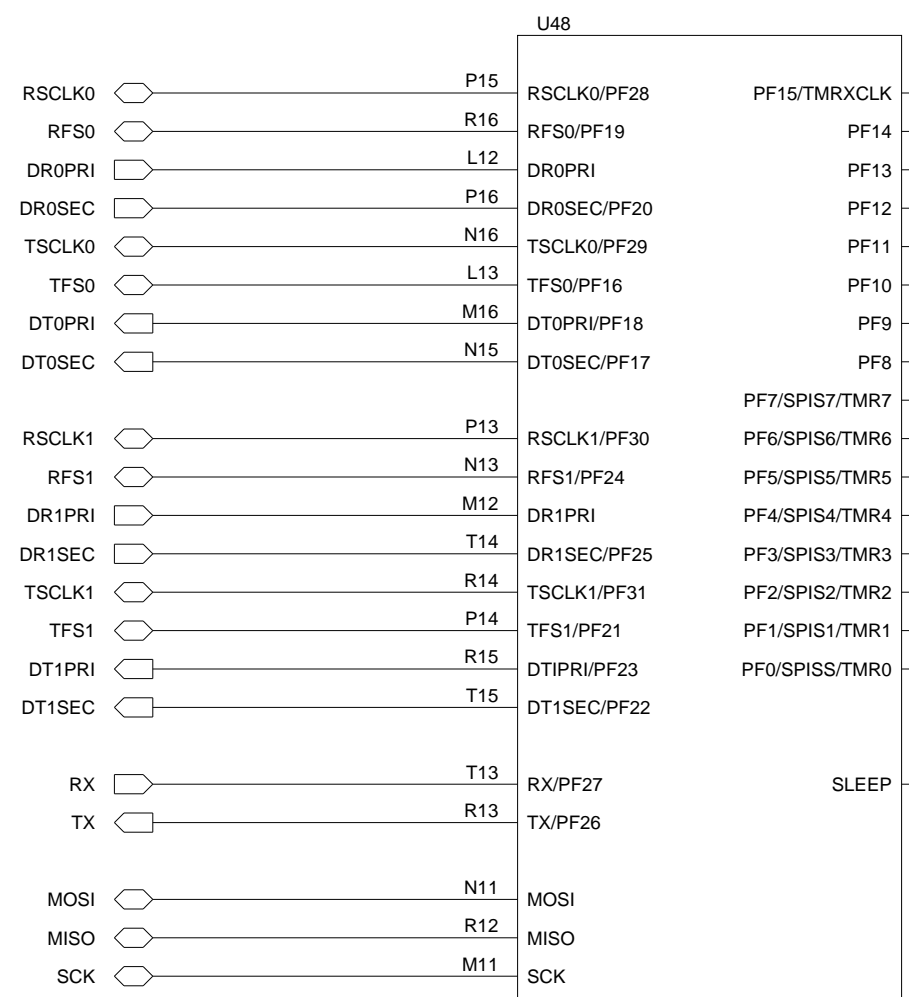

PROGR. FLAG	FUNCTION
PF15	AD1836 CODEC RESET
PF14	ADV7179 VIDEO ENCODER RESET
PF13	ADV7183A VIDEO DECODER RESET
PF12	GENERAL PURPOSE
PF11	GENERAL PURPOSE
PF10	GENERAL PURPOSE
PF9	GENERAL PURPOSE
PF8	GENERAL PURPOSE / PUSH BUTTON STATUS INPUT
PF7	GENERAL PURPOSE / PUSH BUTTON STATUS INPUT
PF6	GENERAL PURPOSE / PUSH BUTTON STATUS INPUT/ UART SIGNAL
PF5	GENERAL PURPOSE / PUSH BUTTON STATUS INPUT/ UART SIGNAL
PF4	GENERAL PURPOSE / AD1836 LATCH SIGNAL
PF3	GENERAL PURPOSE / VIDEO DECODER FIELD
PF2	GENERAL PURPOSE / VIDEO DECODER OUTPUT ENABLE
PF1	GENERAL PURPOSE / I2C SERIAL DATA/SPIS1
PF0	GENERAL PURPOSE / I2C SERIAL CLOCK/SPISS

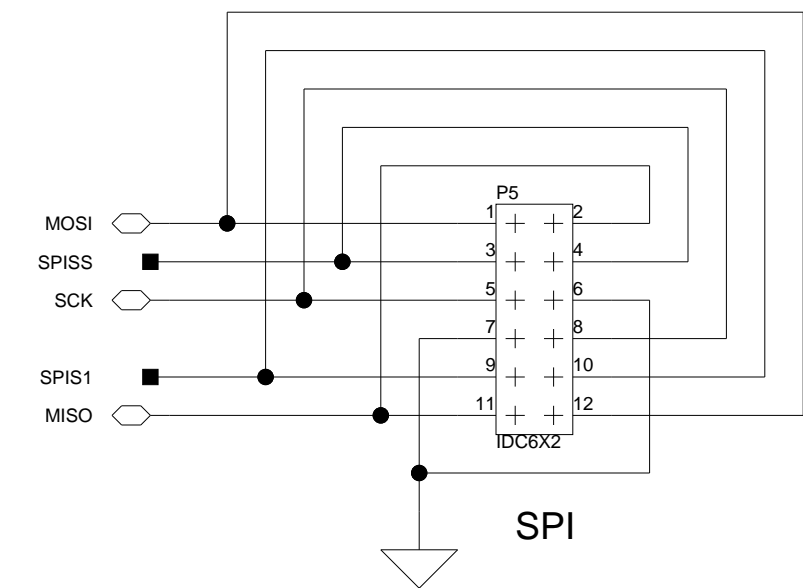

SPI

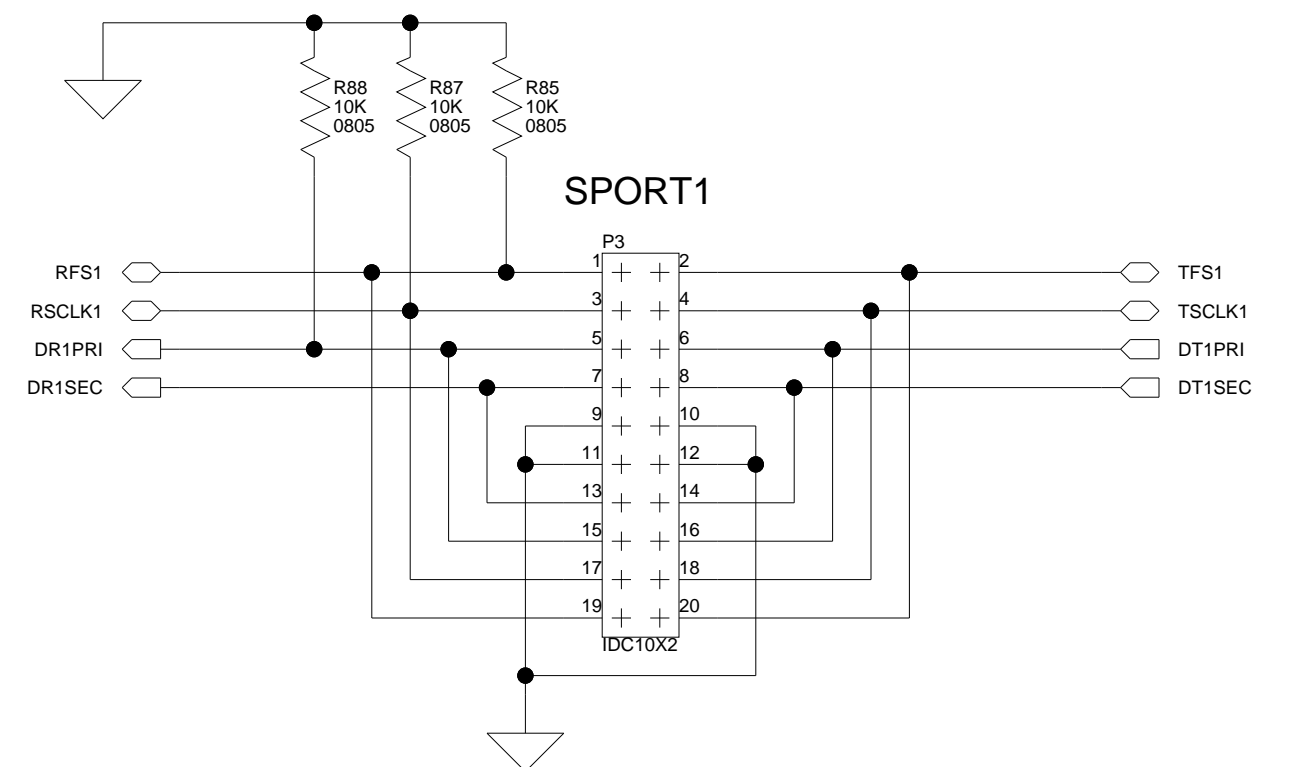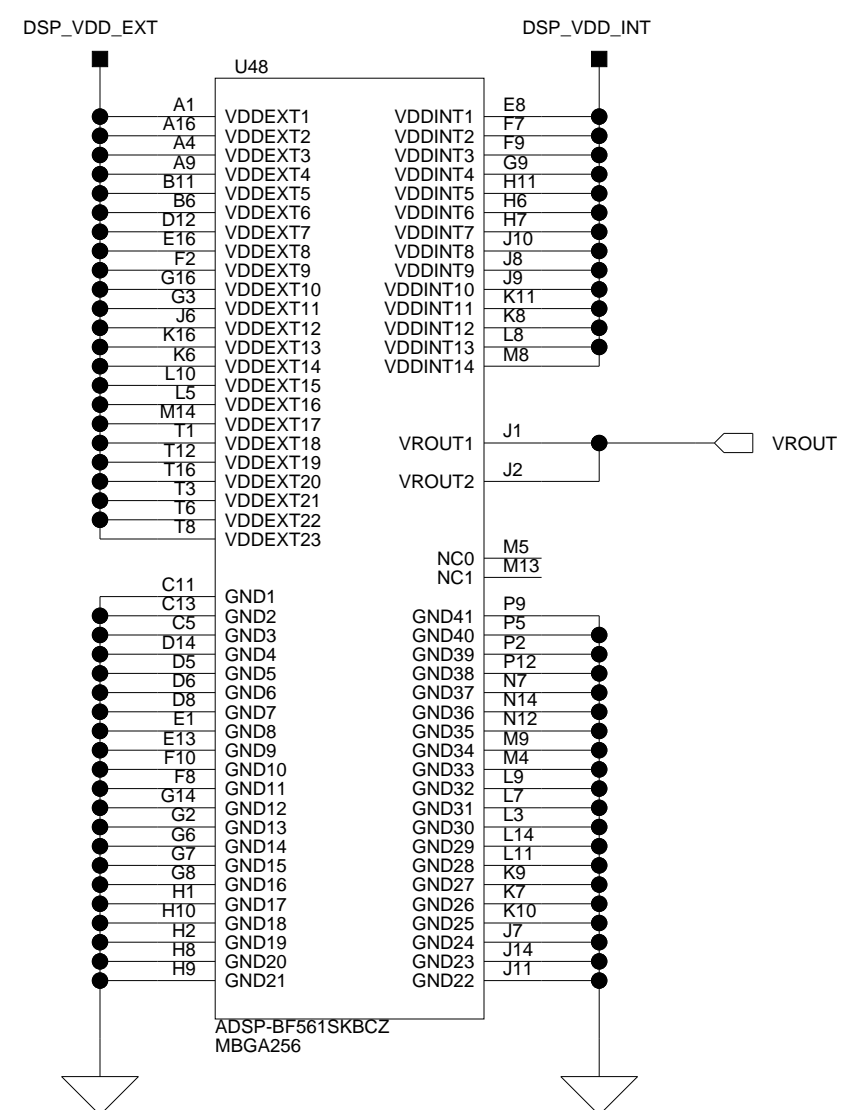

SPORT1




ANALOG DEVICES


20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title			ADSP-BF561 EZ-KIT LITE DSP - PROGR. FLAGS, SPI		
Size C	Board No.				Rev
	A0185-2003				2.3
Date	11-7-2007_15:11	Sheet	3	of	14

SW5: PPI CLK Routing Select
(Default: 1 = OFF, 2 = ON, 3 = ON, 4 = ON)


1 or 3 PPIxCLK_SEL0	2 or 4 PPIxCLK_SEL1	PPIxCLK
ON	ON	PPL_27MHZ_CLK
OFF	ON	VDEC_CLKOUT
X	OFF	EXPANSION_CLK

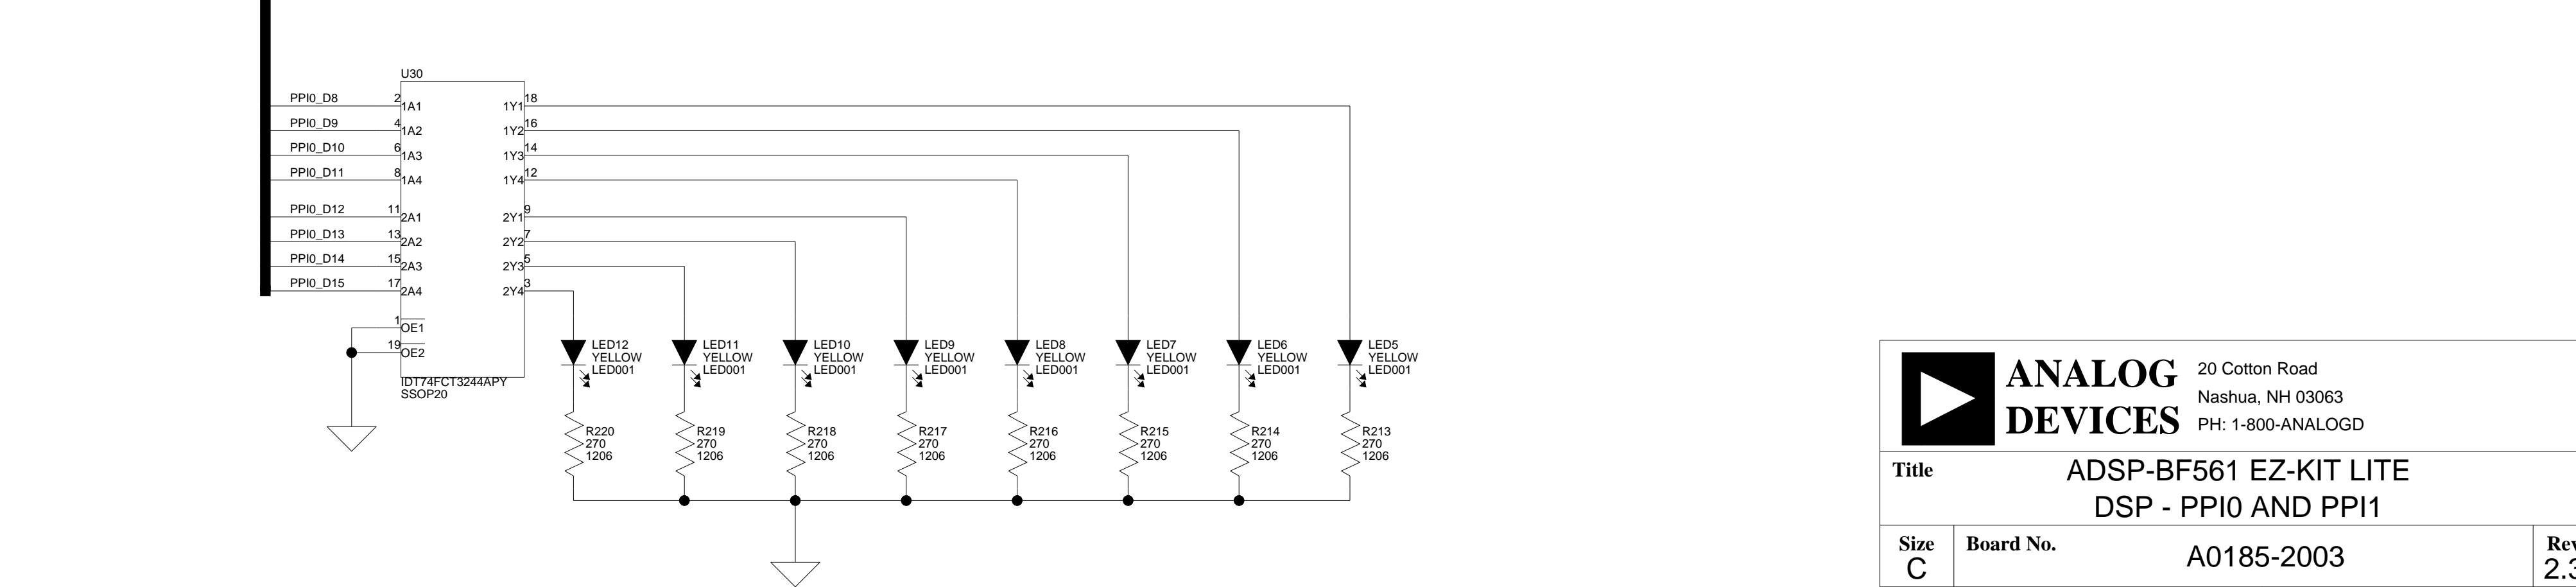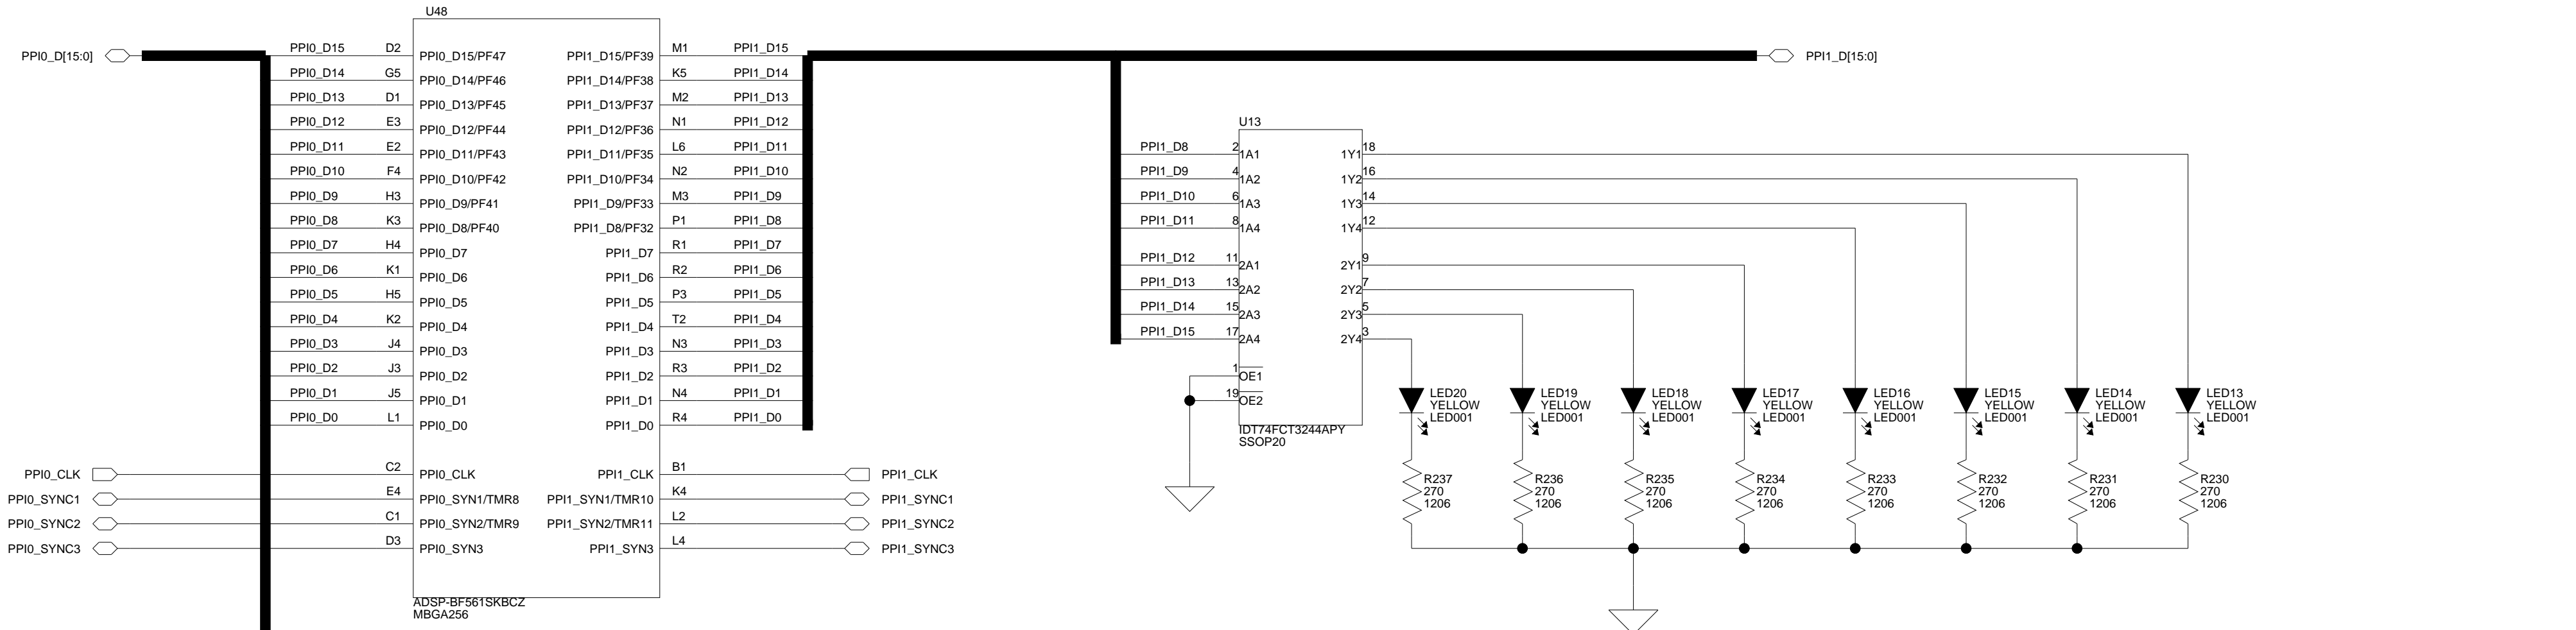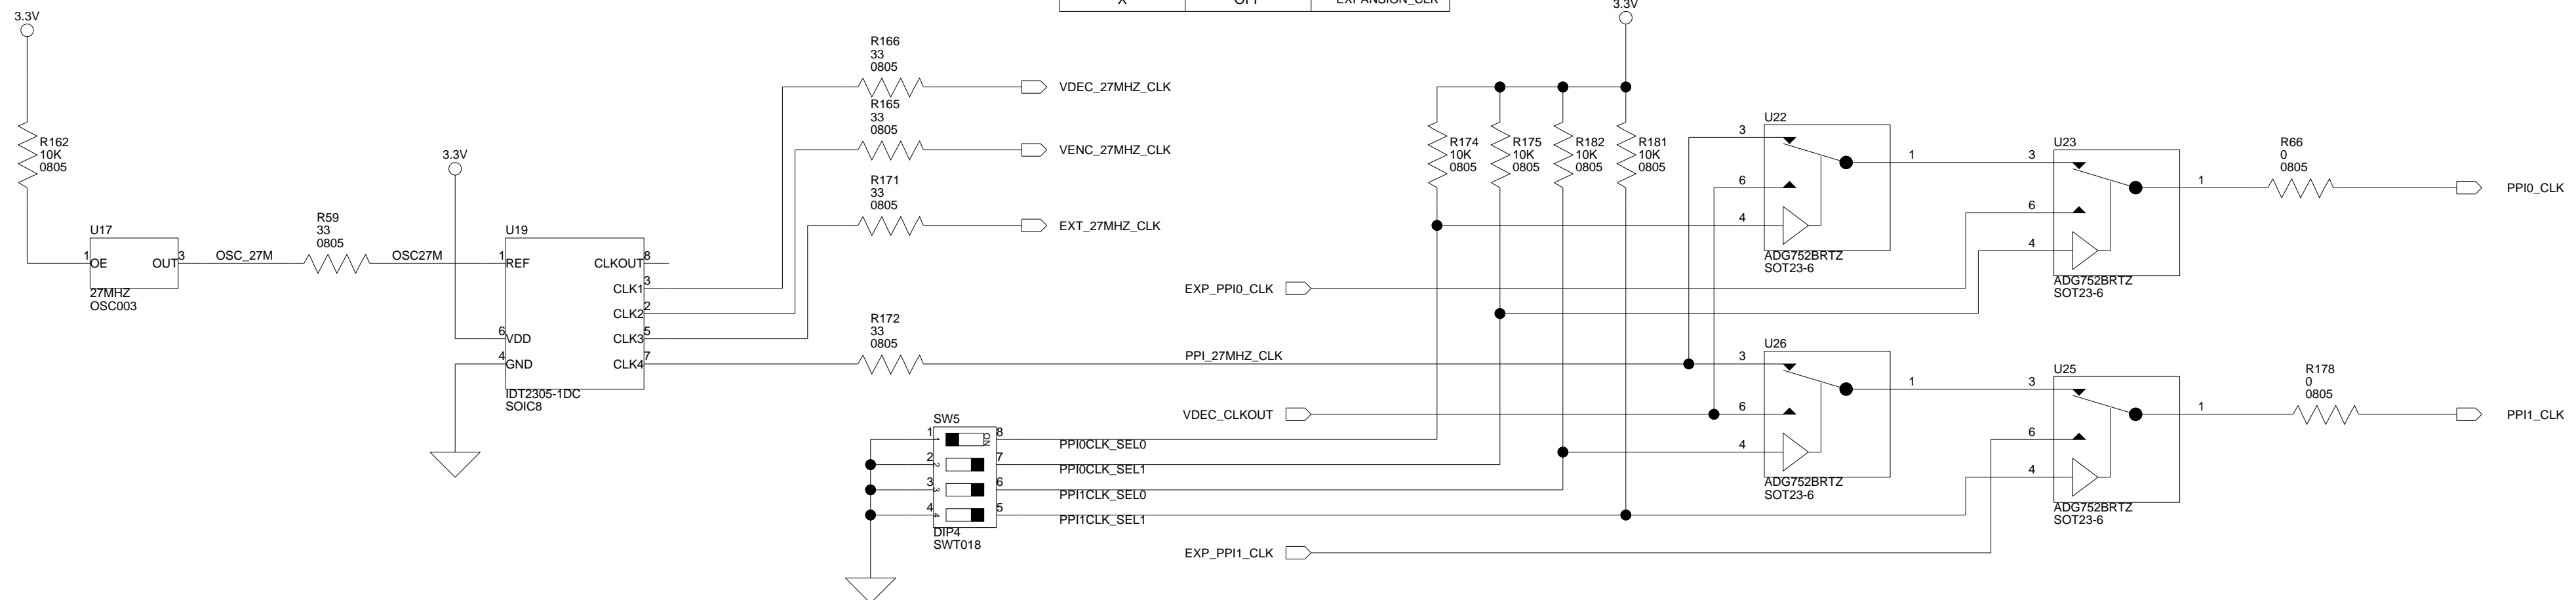

 ANALOG DEVICES		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
		Title ADSP-BF561 EZ-KIT LITE DSP - PPI0 AND PPI1	
Size C	Board No. A0185-2003	Rev 2.3	
Date 11-7-2007_15:11	Sheet 4 of 14		


FLASH A (8MB)
4M x 16



SDRAM 64MB
(256Mb x 2 Chips)

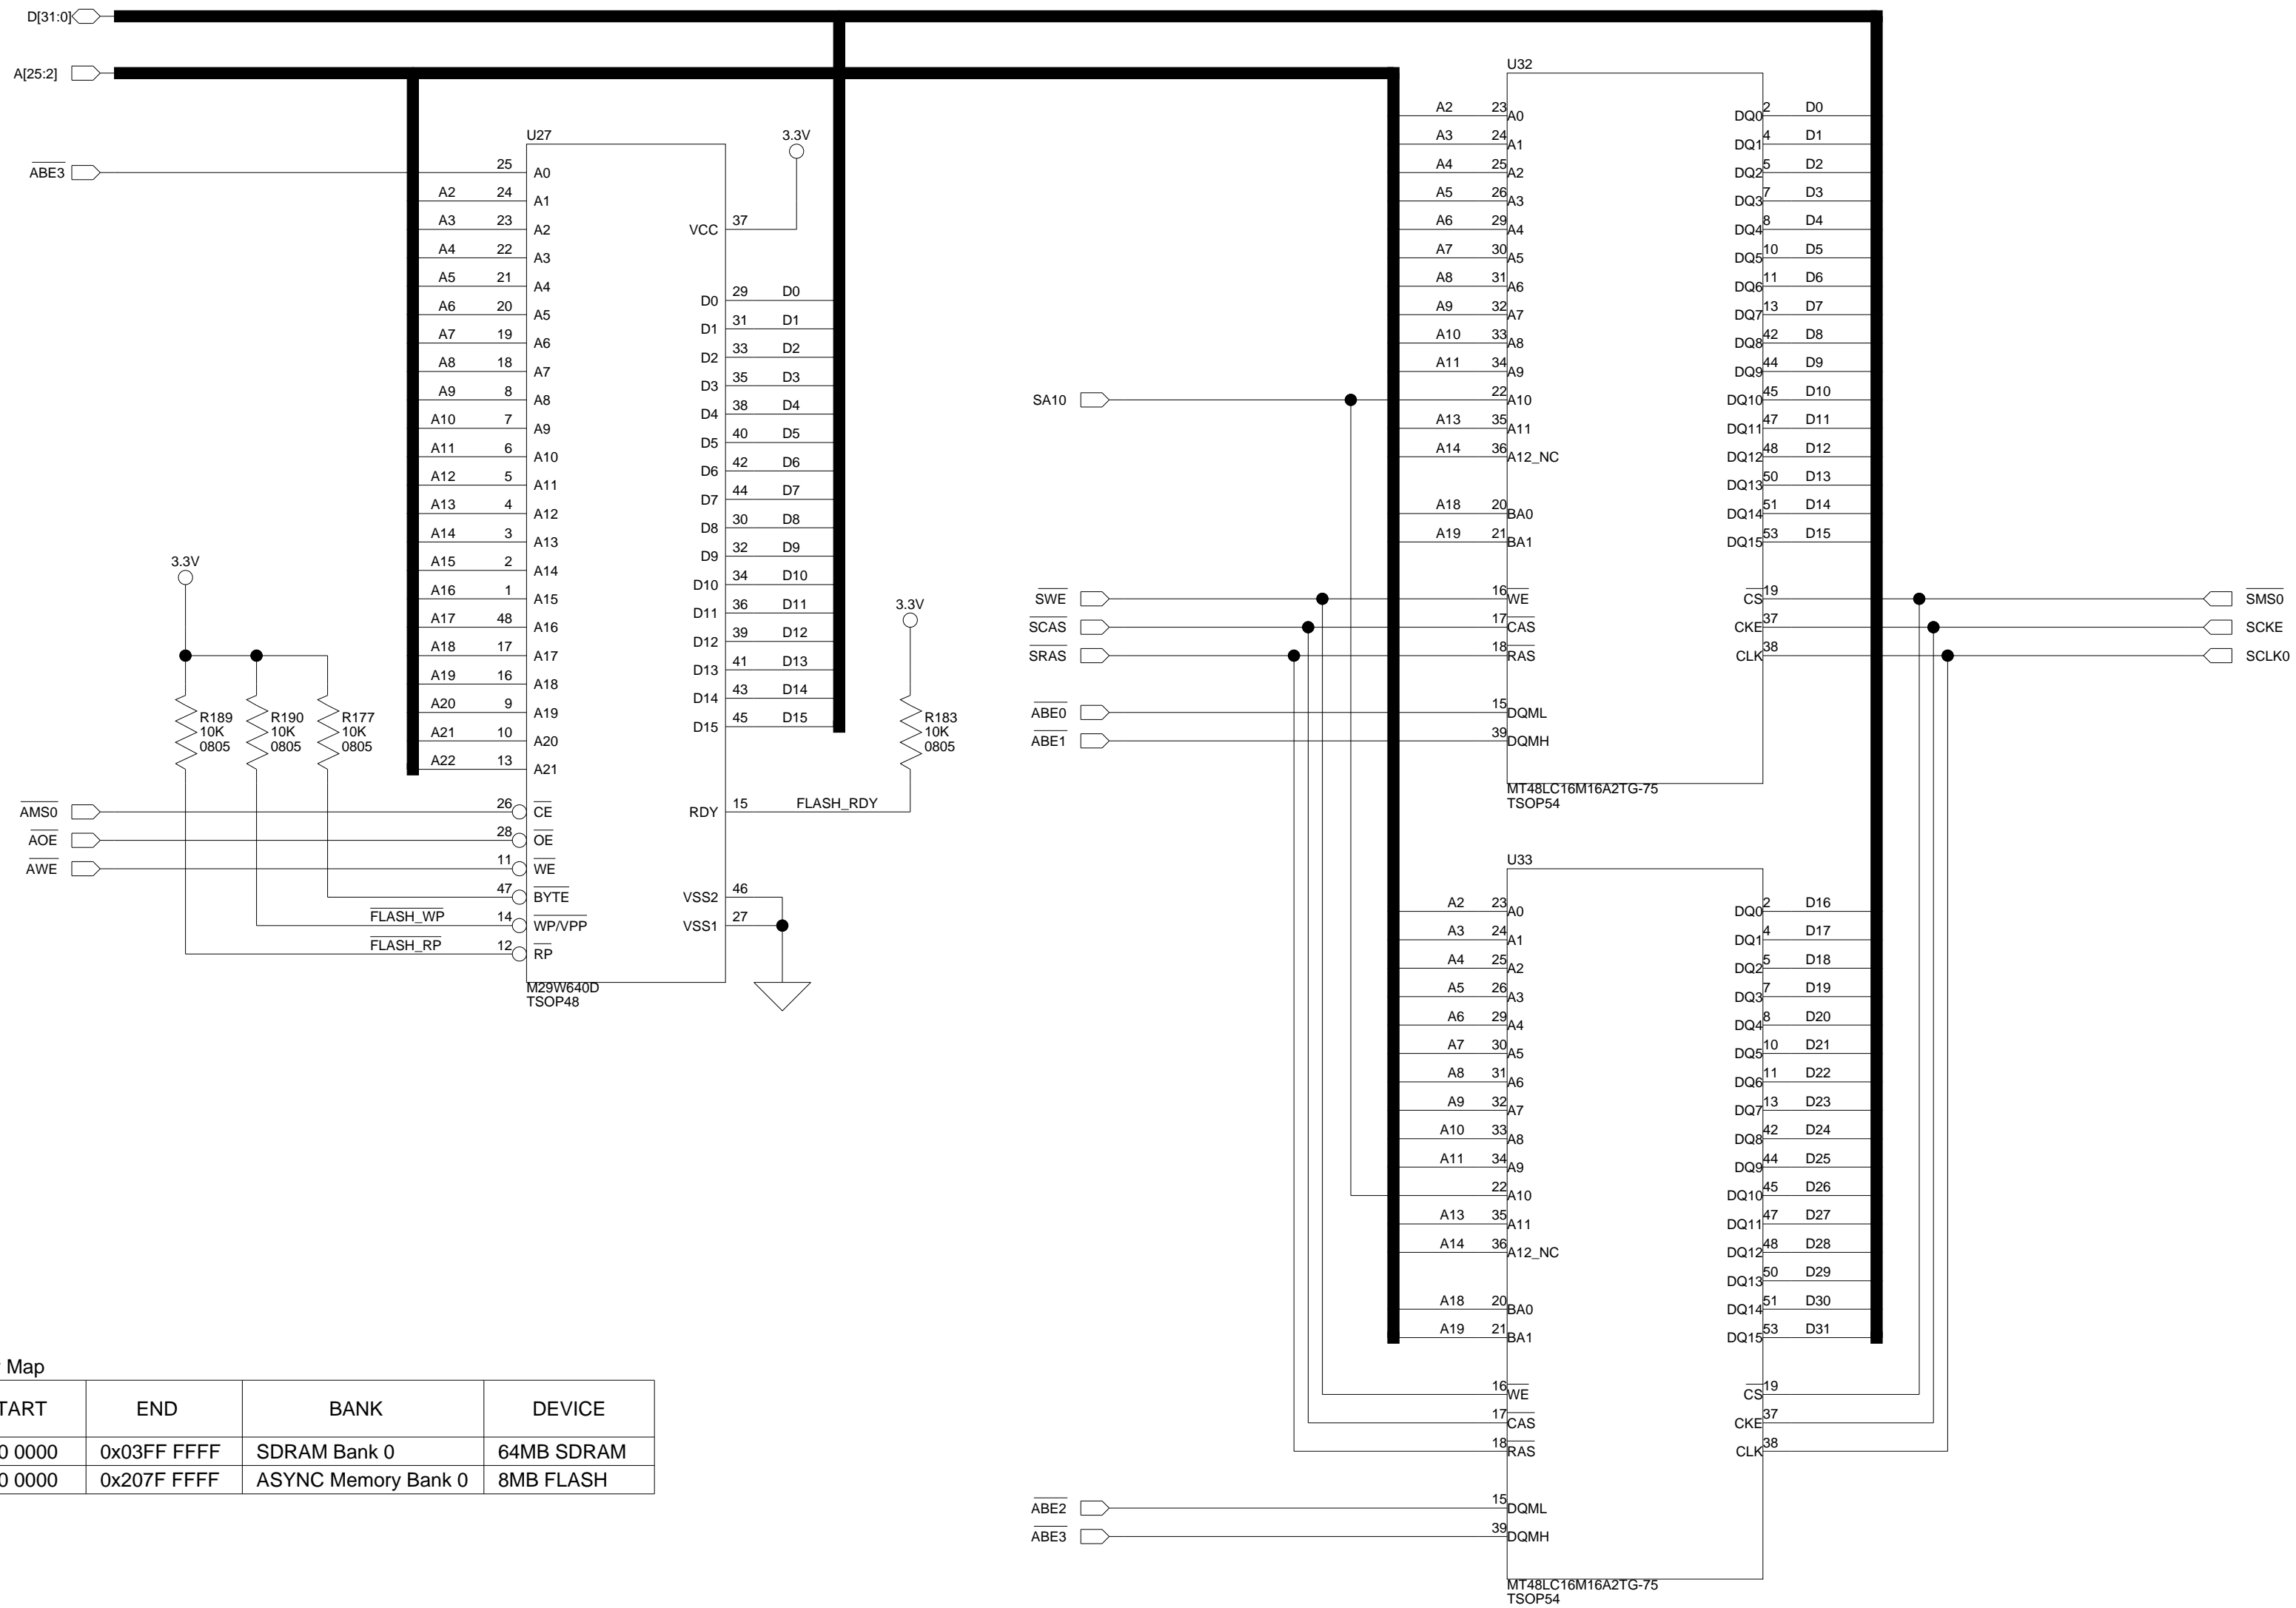


Memory Map

START	END	BANK	DEVICE
0x0000 0000	0x03FF FFFF	SDRAM Bank 0	64MB SDRAM
0x2000 0000	0x207F FFFF	ASYNC Memory Bank 0	8MB FLASH





 ANALOG DEVICES		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
		Title ADSP-BF561 EZ-KIT LITE MEMORY - FLASH & SDRAM	
Size C	Board No. A0185-2003	Rev 2.3	
Date 11-7-2007_15:11	Sheet 5 of 14		

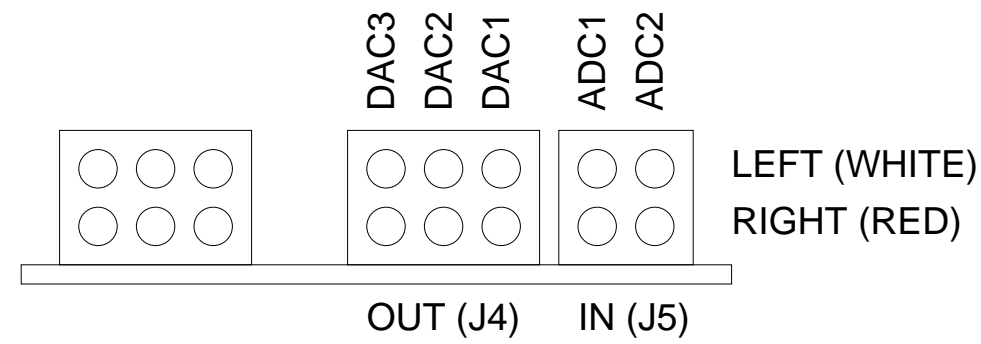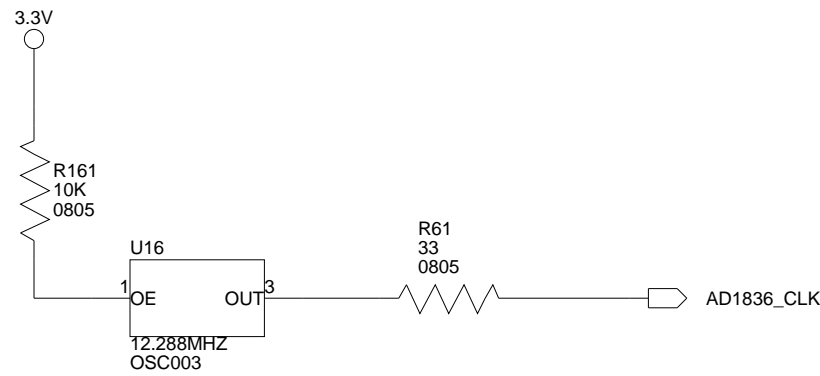

AUDIO CODEC

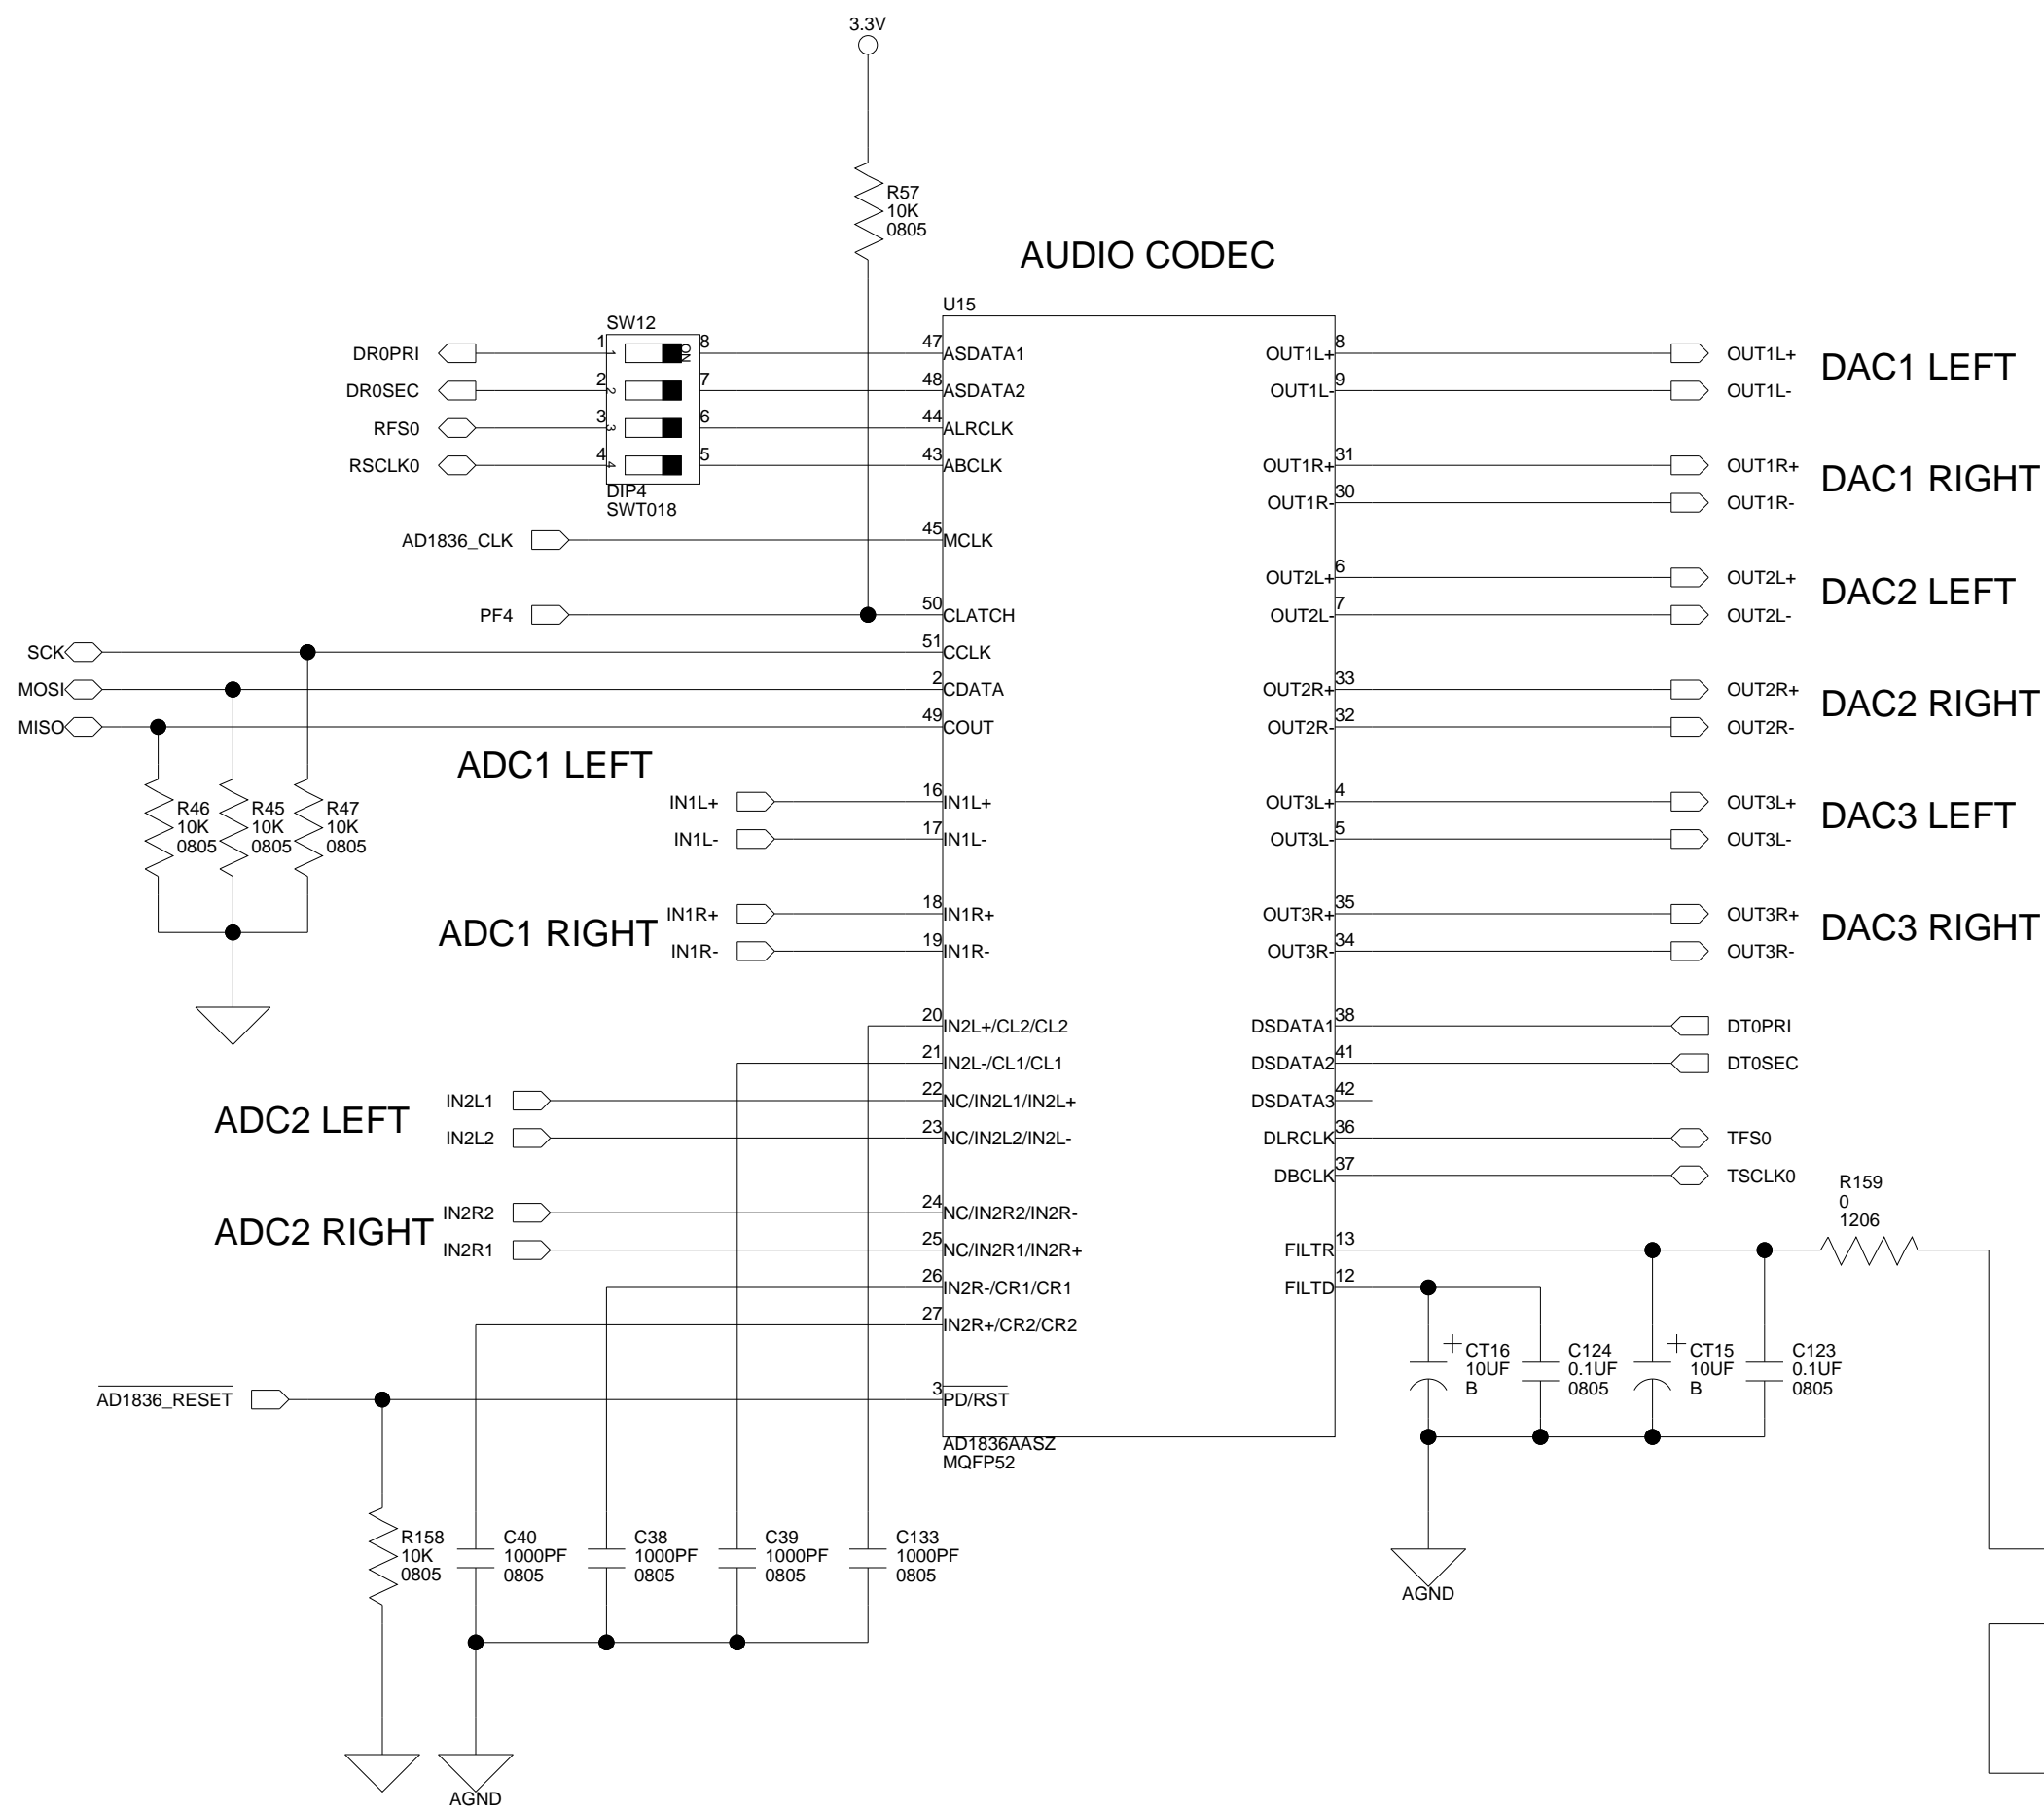


SW10: Audio Loopback
For Test Purposes
Default = All Off

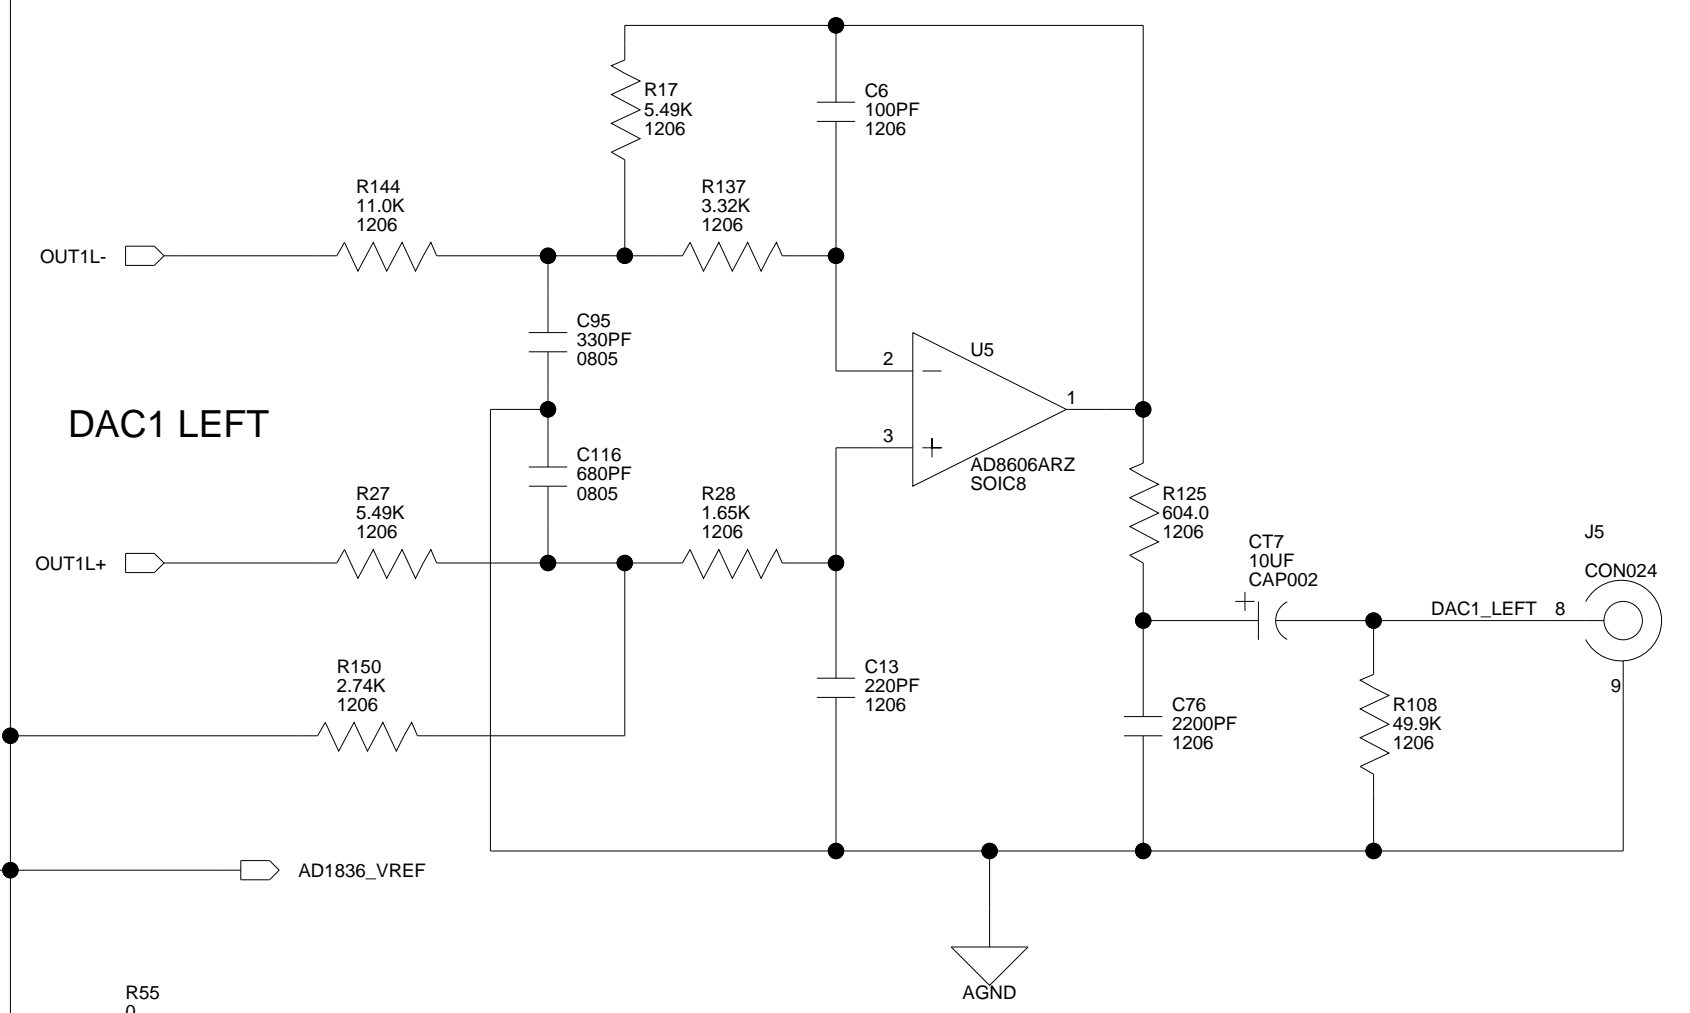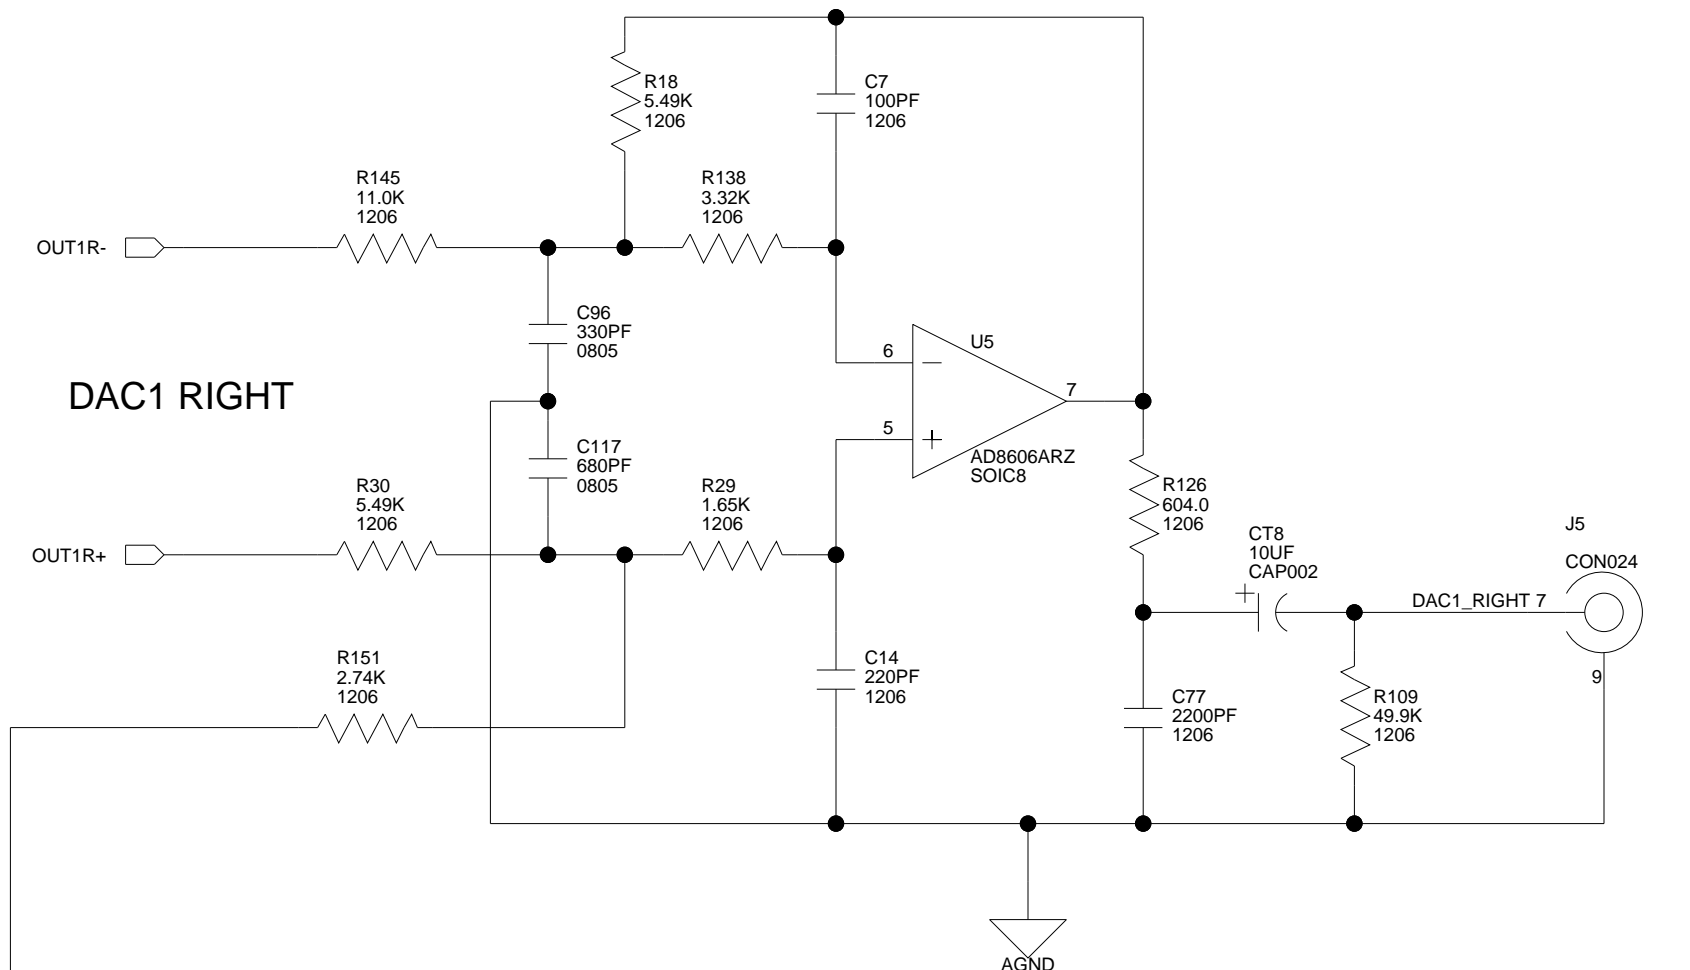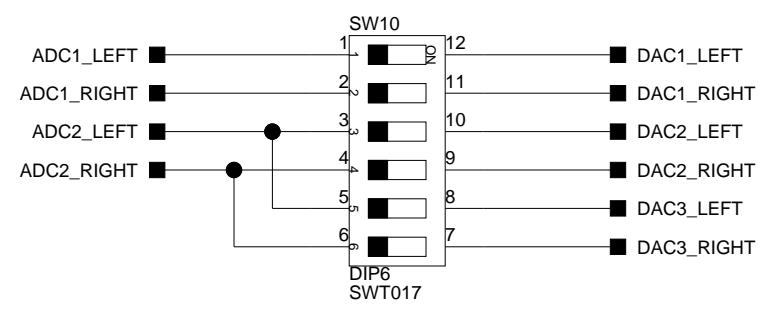


		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
		Title ADSP-BF561 EZ-KIT LITE AUDIO CODEC	
Size C	Board No. A0185-2003	Rev 2.3	
Date 11-7-2007_15:11	Sheet 6 of 14		


DAC2 RIGHT

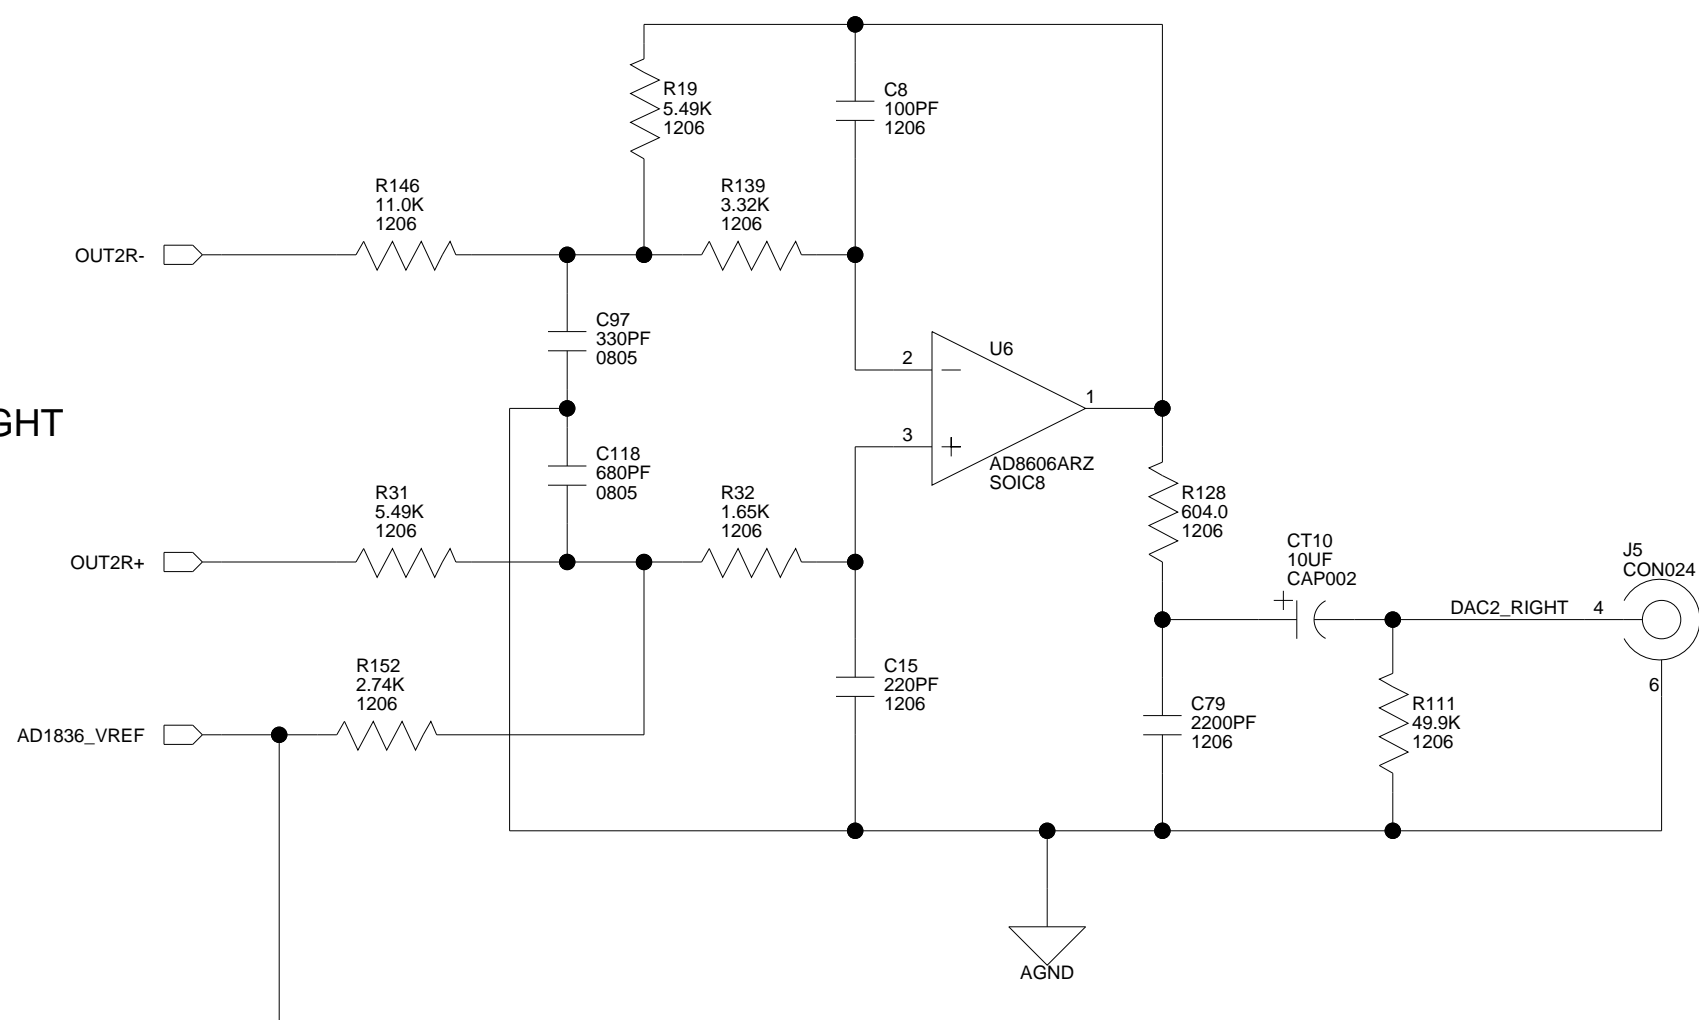


DAC3 RIGHT

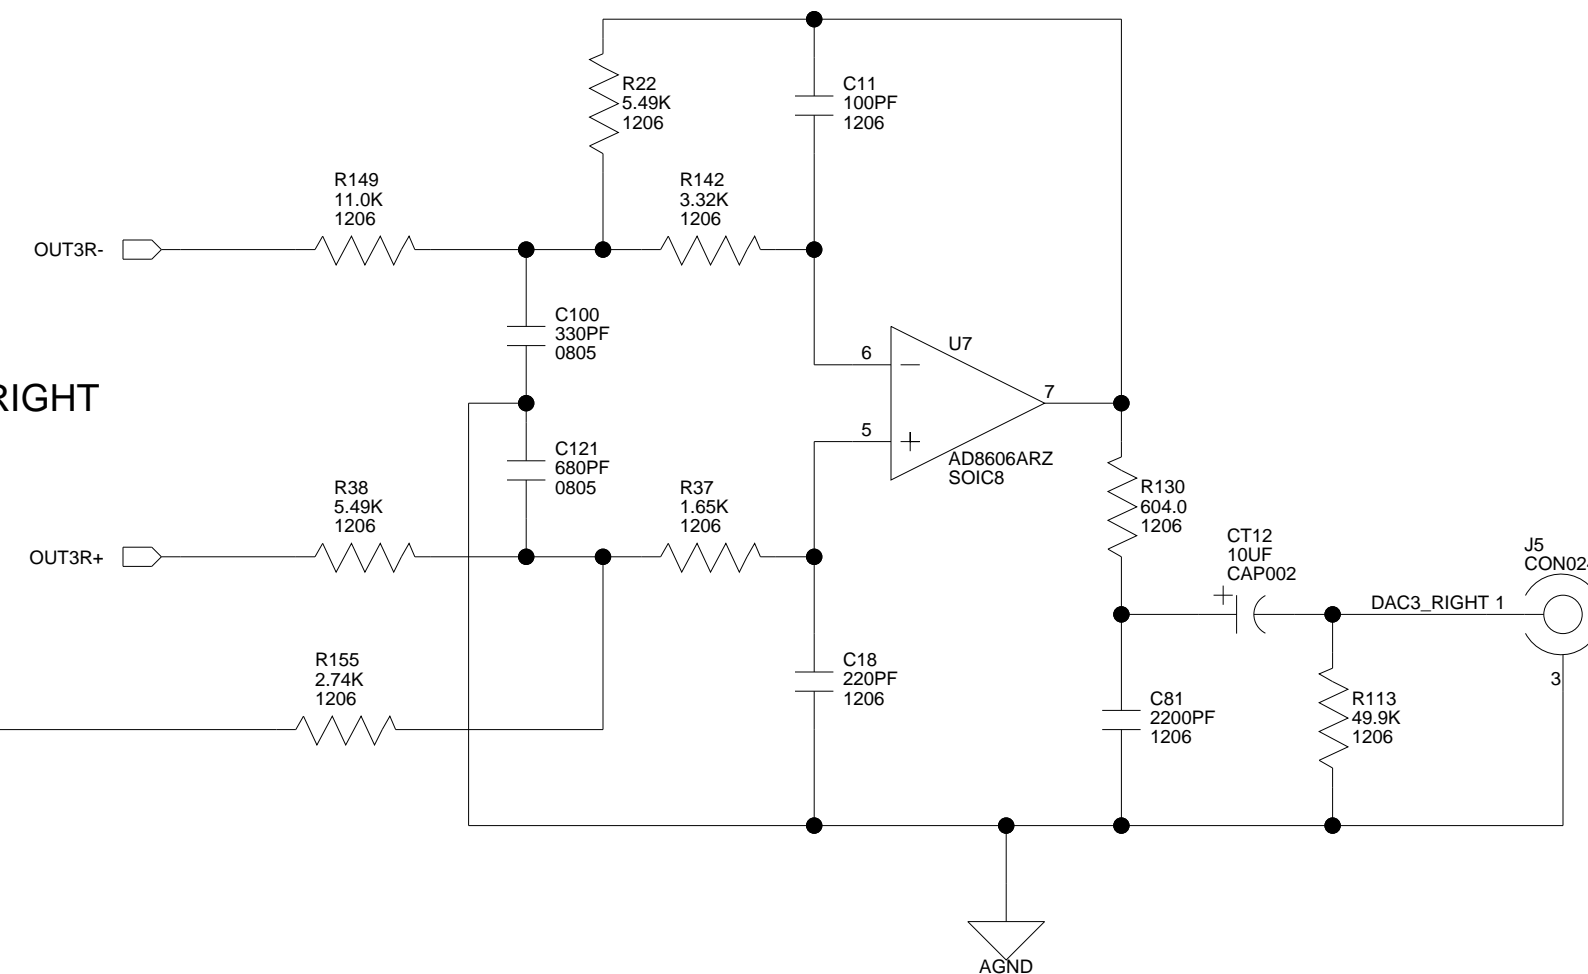






DAC2 LEFT

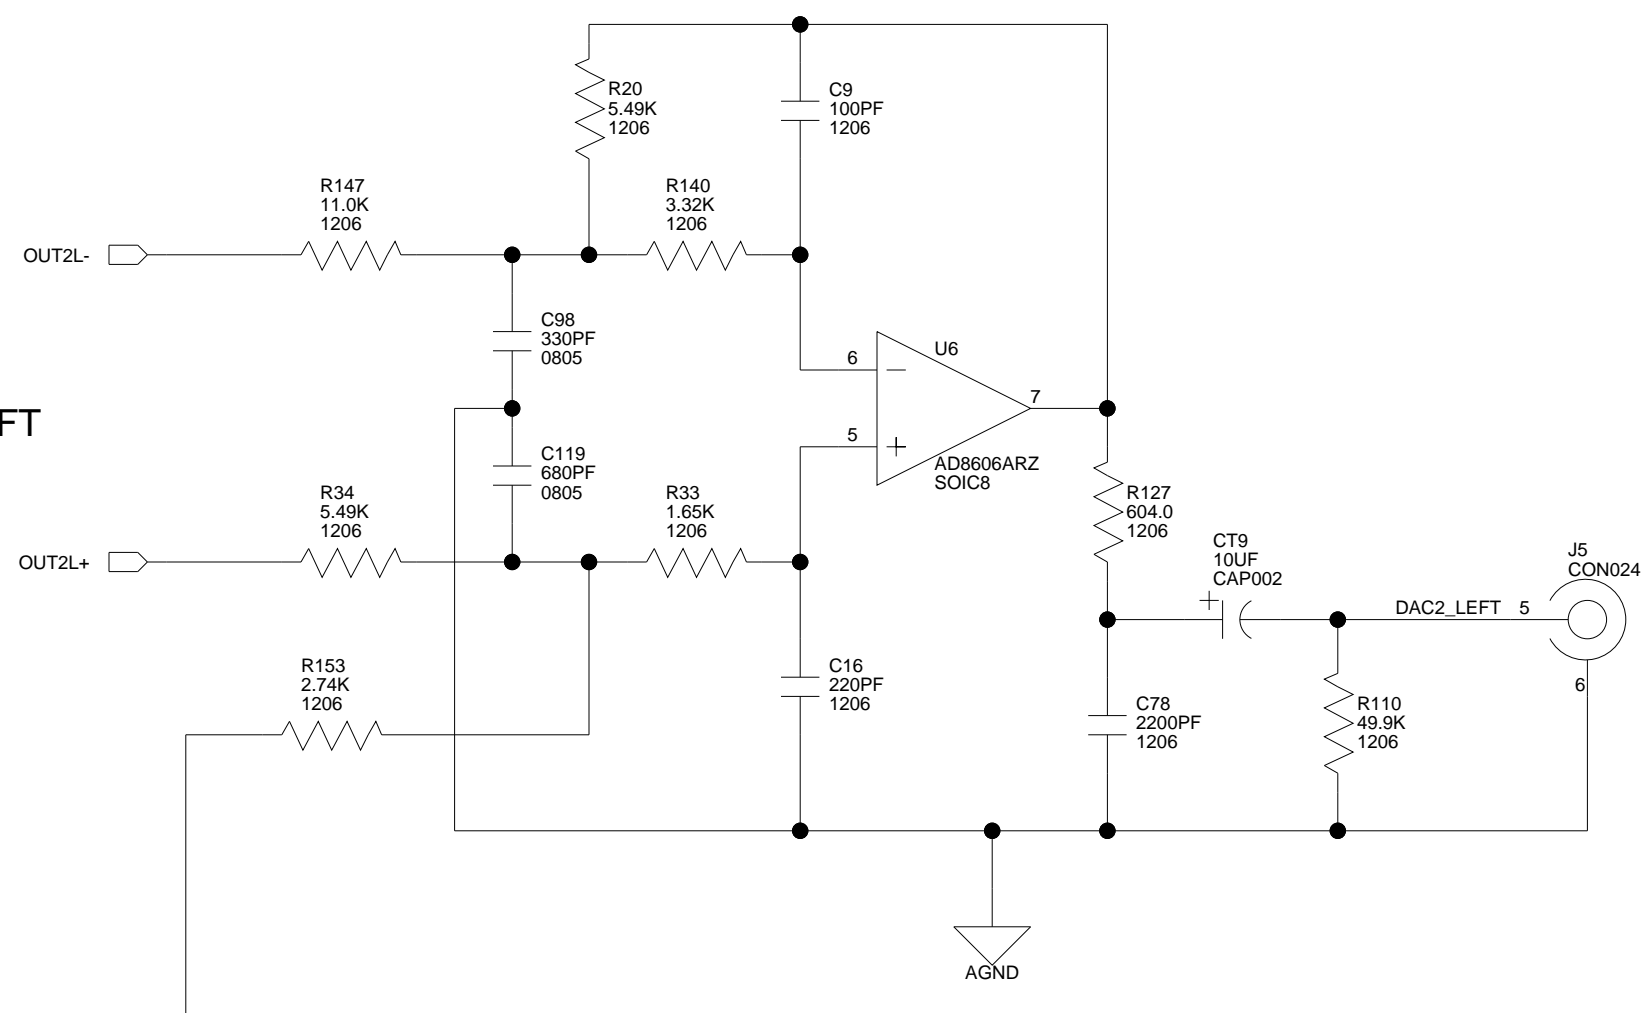



DAC3 LEFT

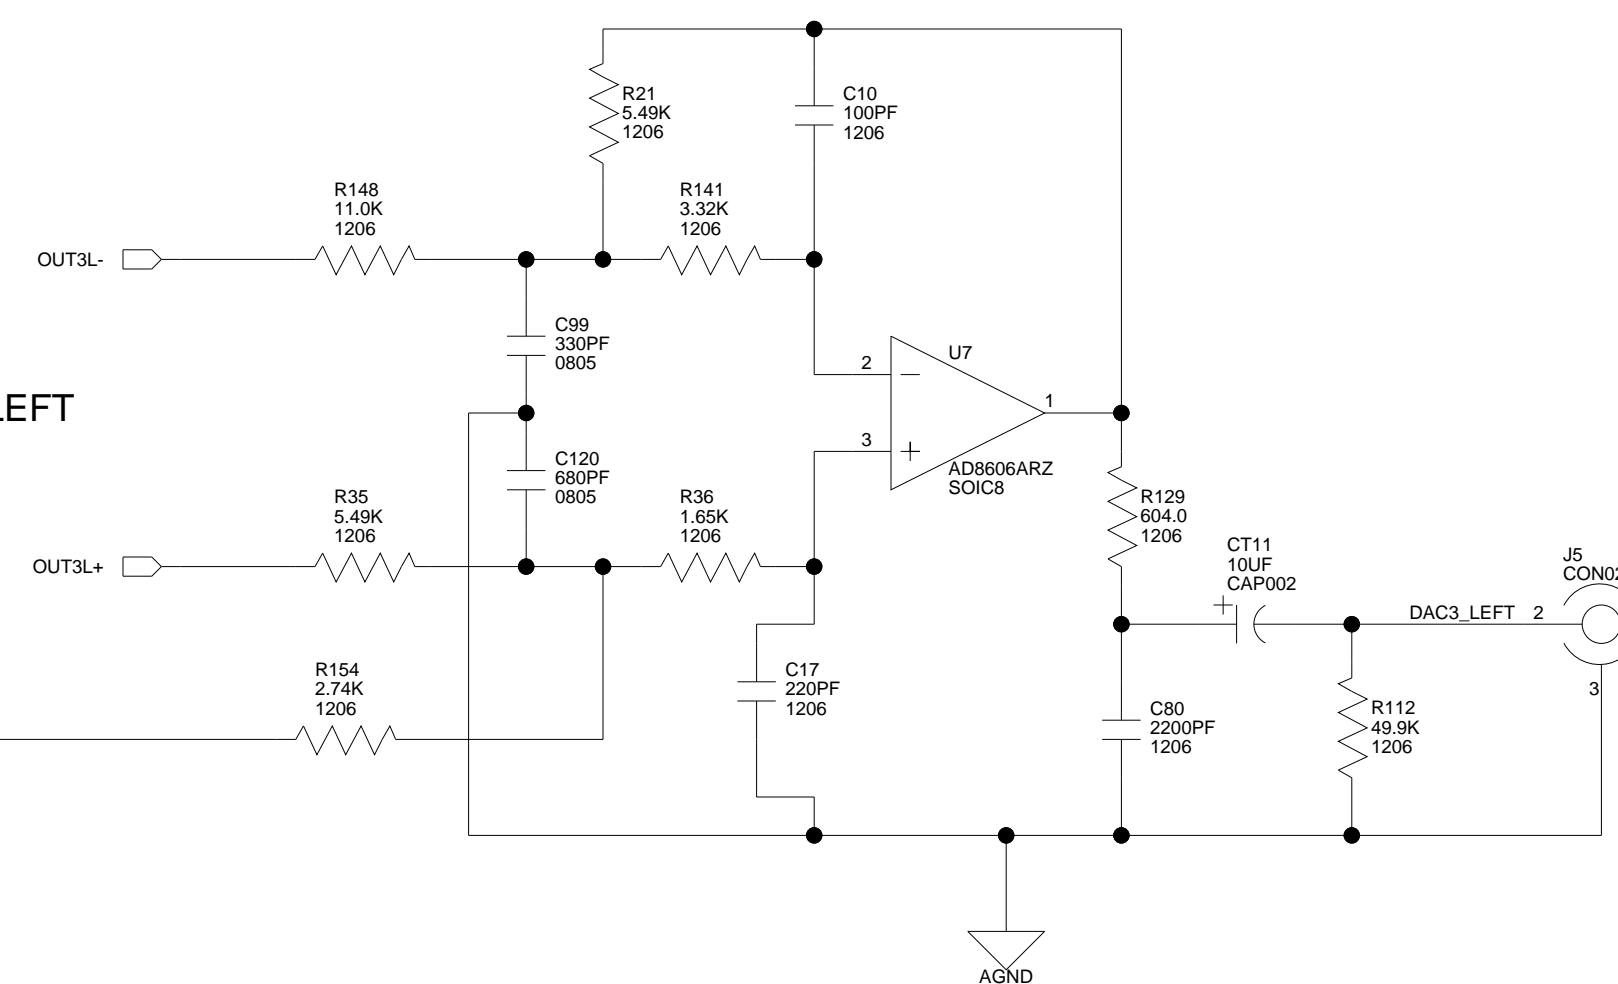

 ANALOG DEVICES		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
		Title ADSP-BF561 EZ-KIT LITE AUDIO OUT	
Size C	Board No. A0185-2003	Rev 2.3	
Date 11-7-2007_15:11	Sheet 7 of 14		

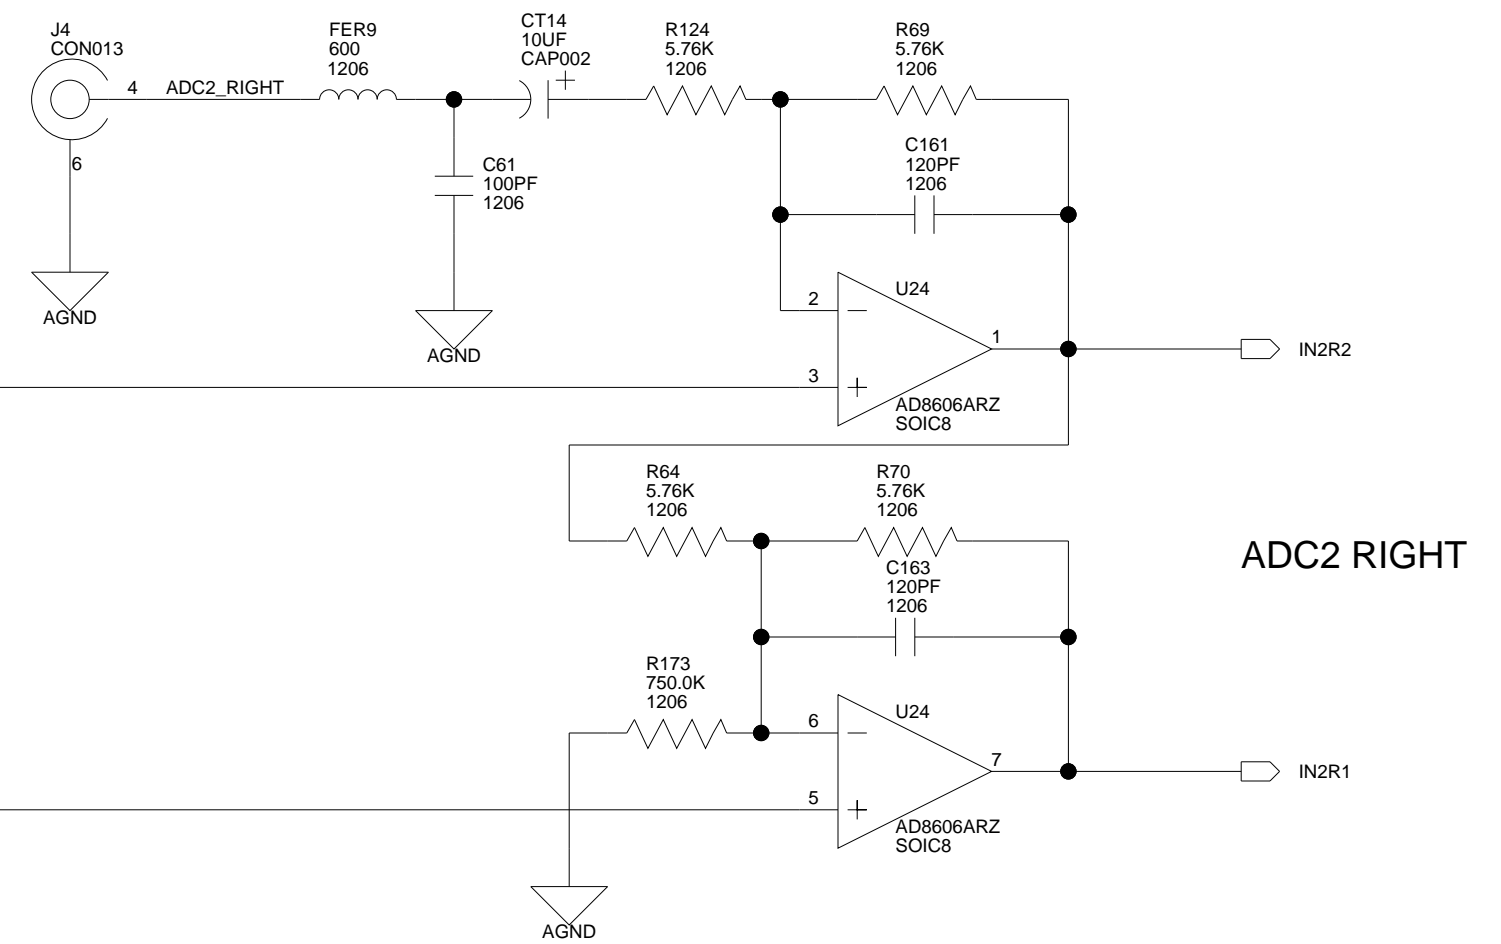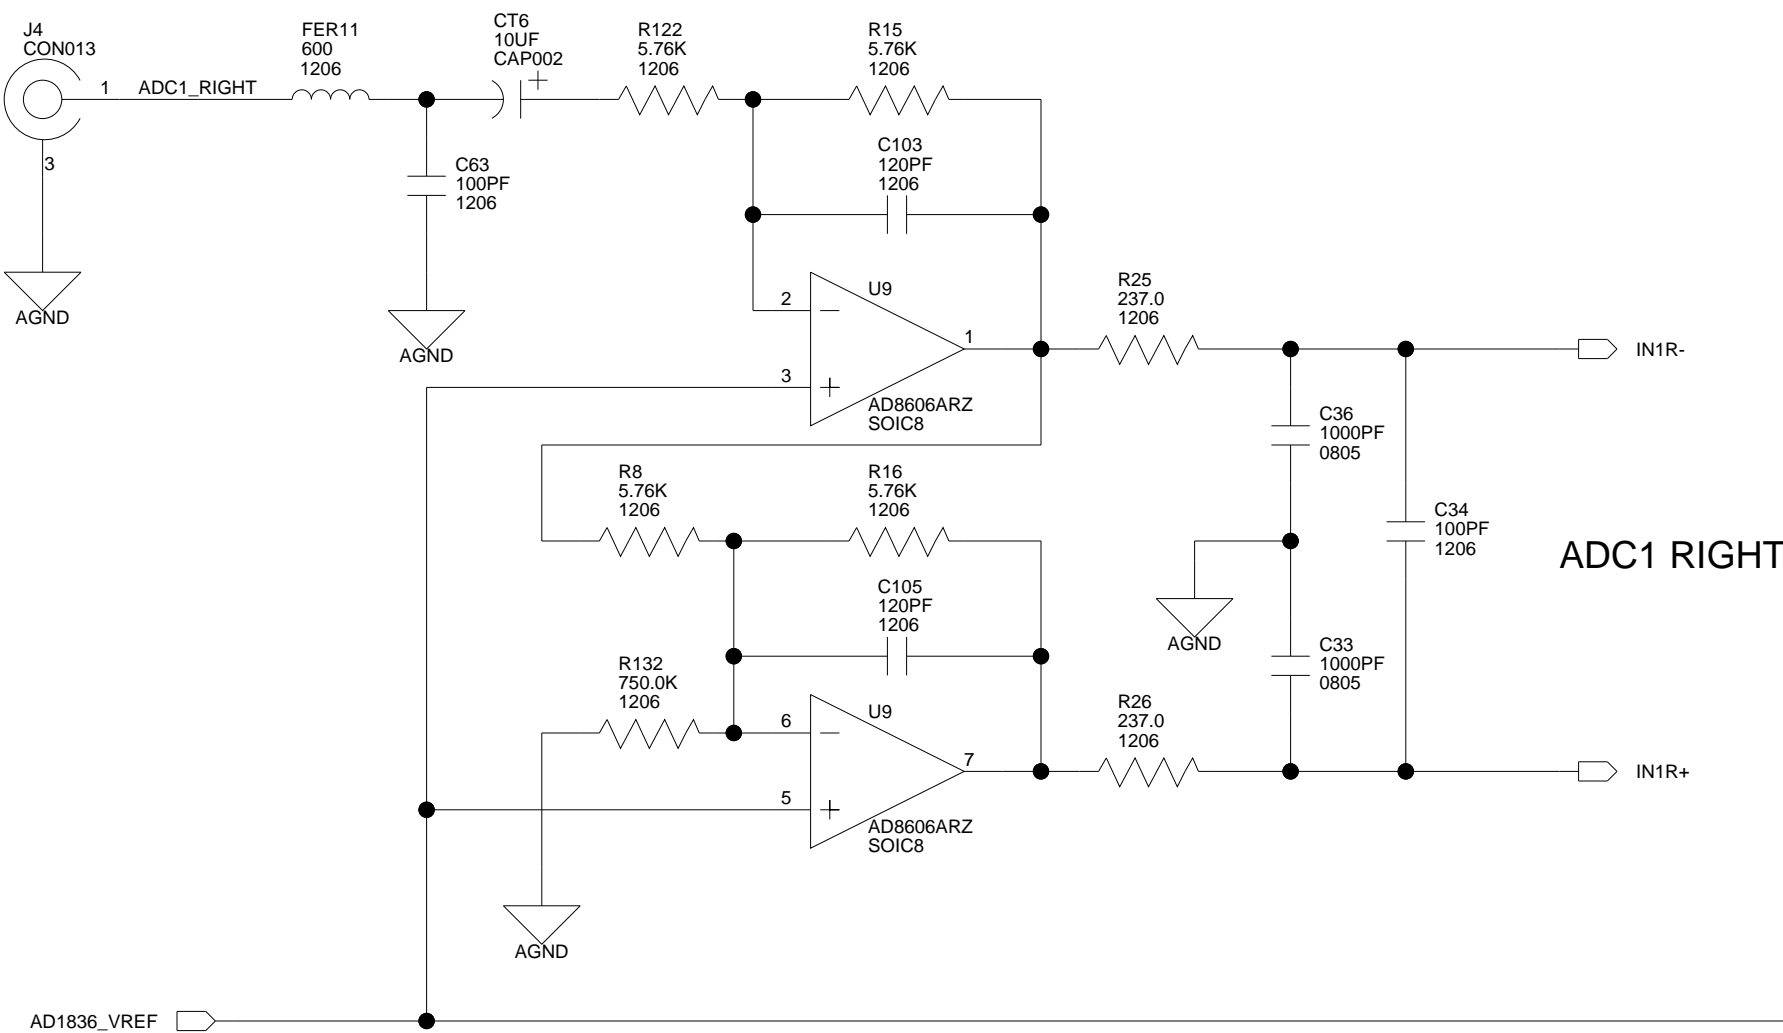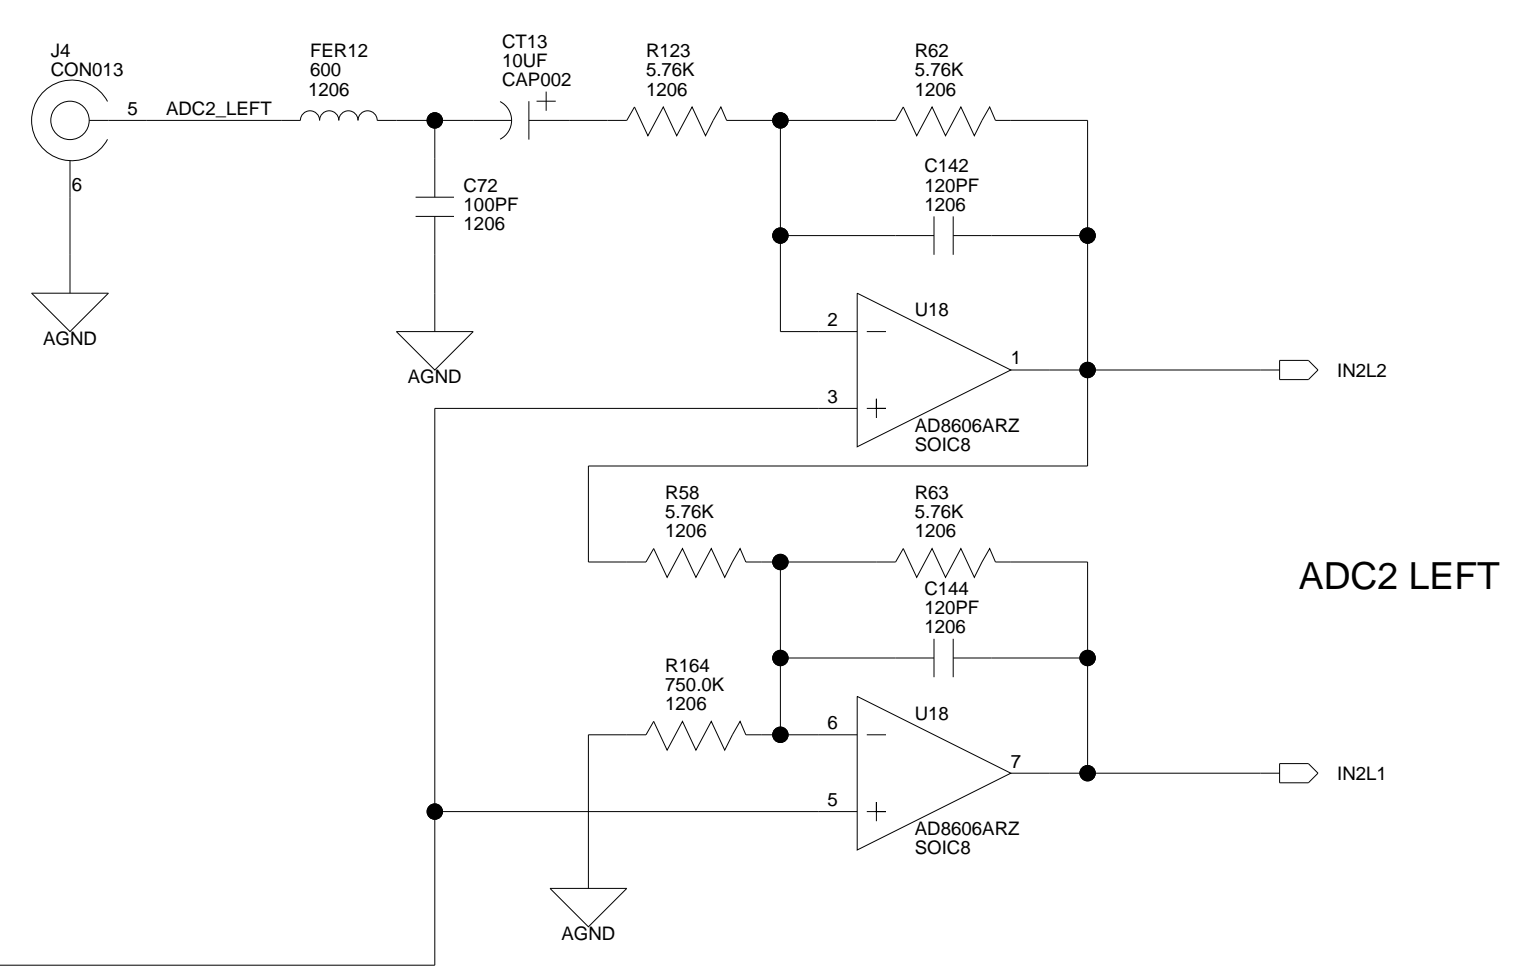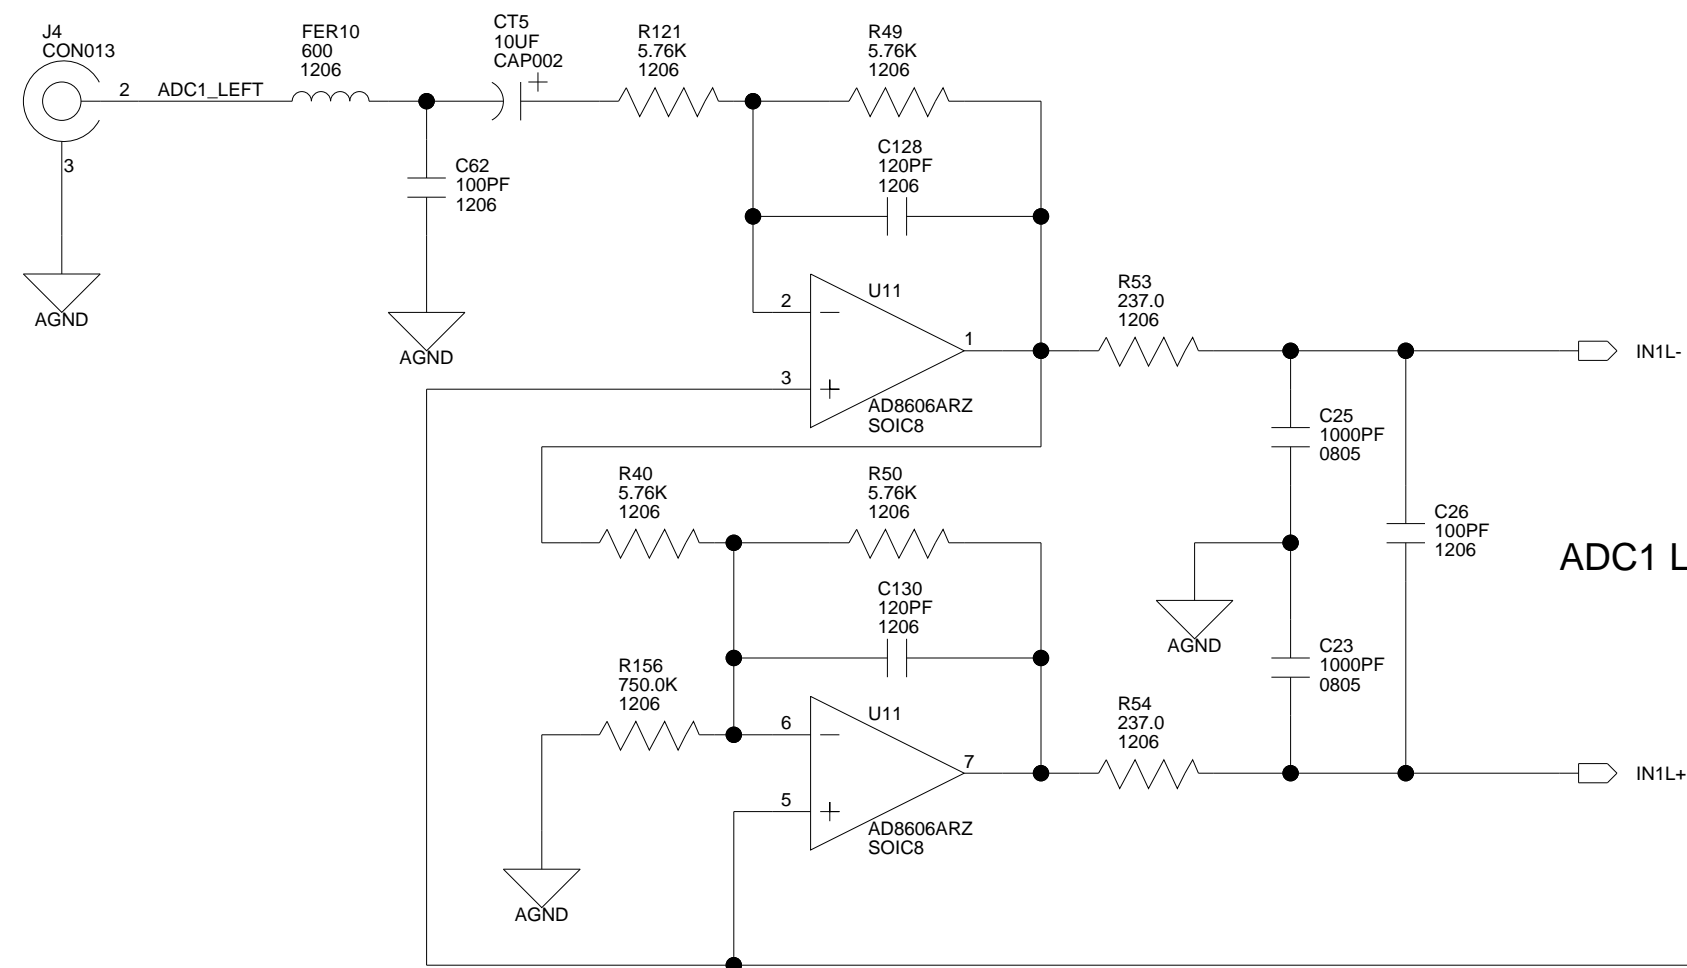

 ANALOG DEVICES		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
		Title ADSP-BF561 EZ-KIT LITE AUDIO IN	
Size C	Board No.	Rev	Rev
Date	11-7-2007_15:11	Sheet	8 of 14

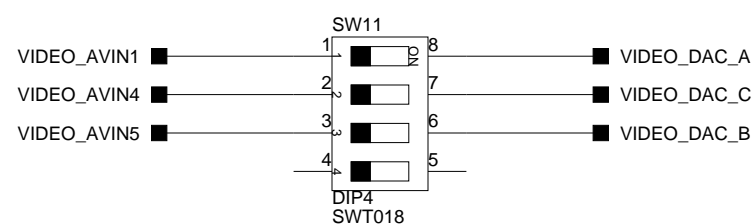


SW11: Video Loopback
For Test Purposes
Default = All Off

	DAC A	DAC B	DAC C
Composite Video		CVSB	C
Component Video	G	B	R
Differential Component Video	Y	U	V
S Video	Y		C

1

1

VIDEO ENCODER

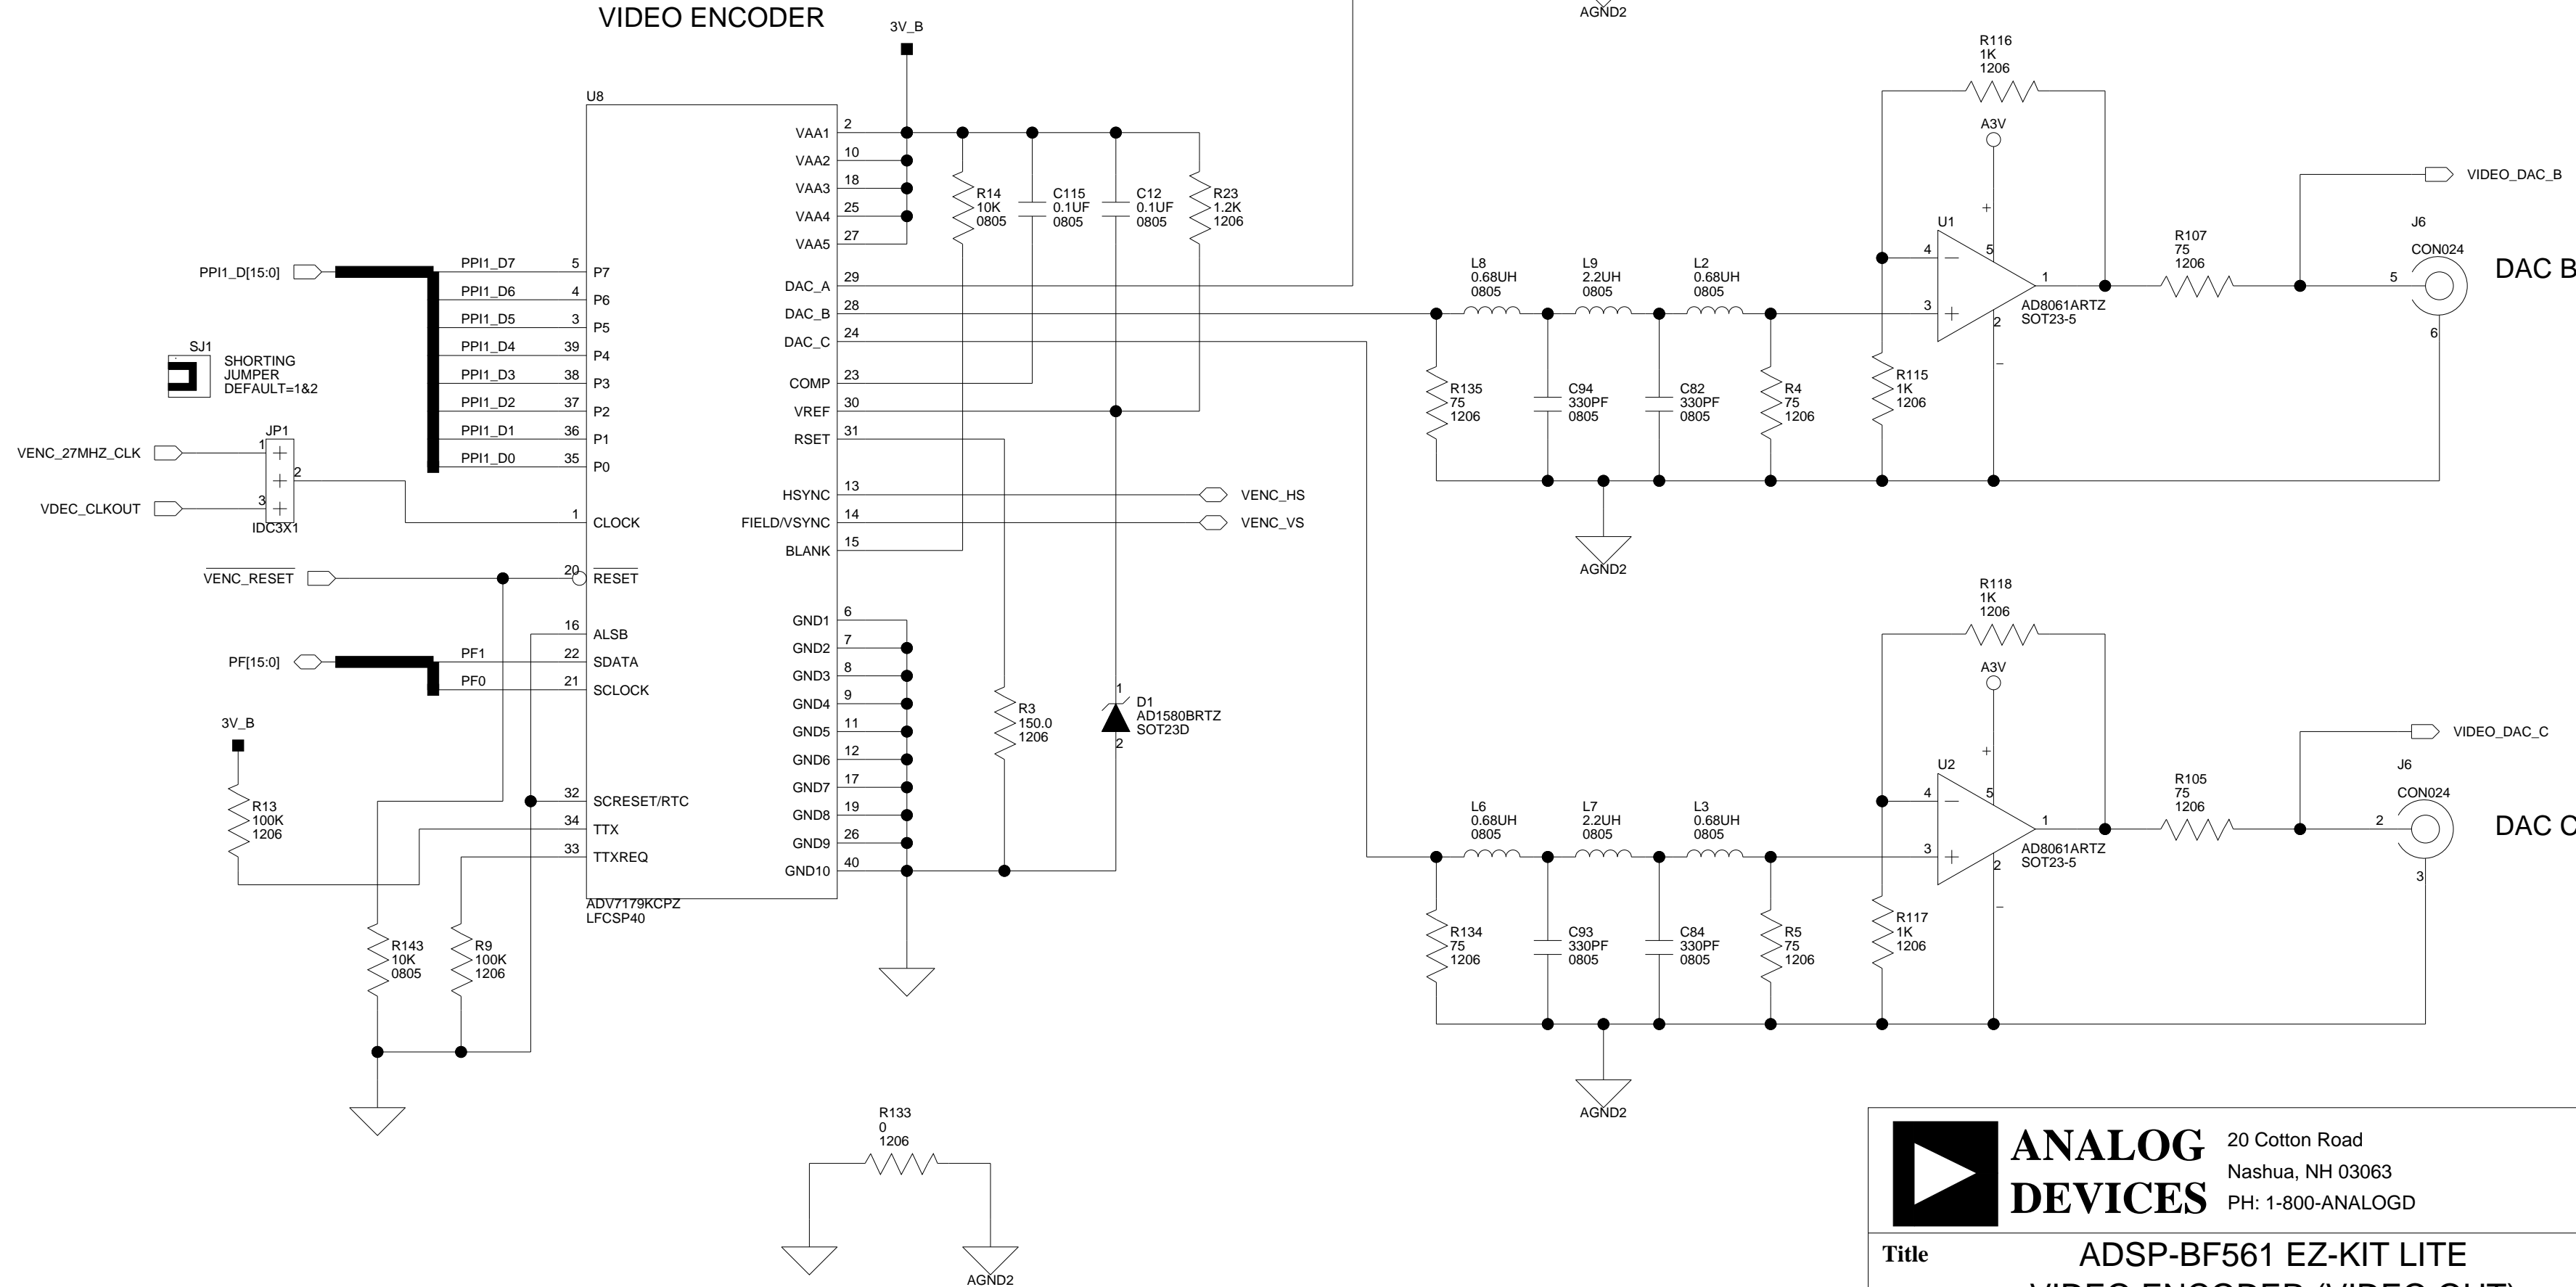

2

3

4

ANALOG DEVICES

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD


Title		
ADSP-BF561 EZ-KIT LITE VIDEO ENCODER (VIDEO OUT)		
Size	Board No.	Rev
C	A0185-2003	2.3
Date	11-7-2007_16:46	Sheet 9 of 14

A


B

C

D

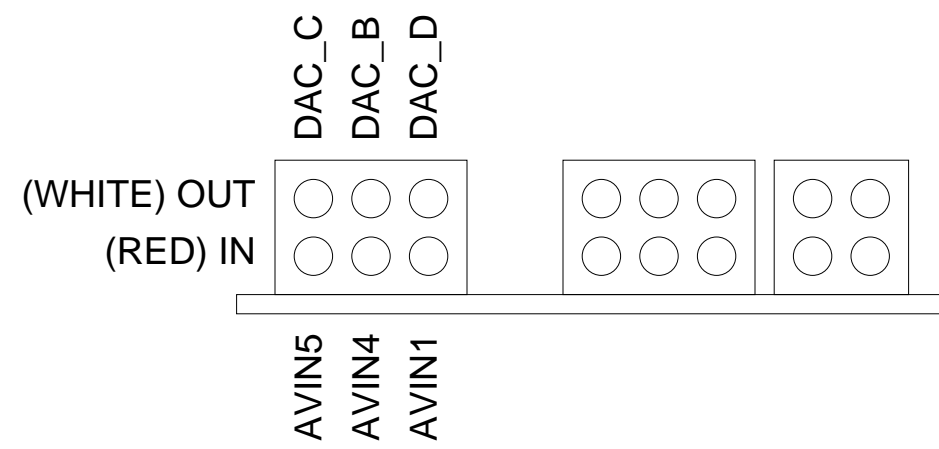


	AVIN1	AVIN4	AVIN5
Composite Video	CVBS	CVBS	CVBS
Differential Component Video	Y	V	U
S Video	Y	C	

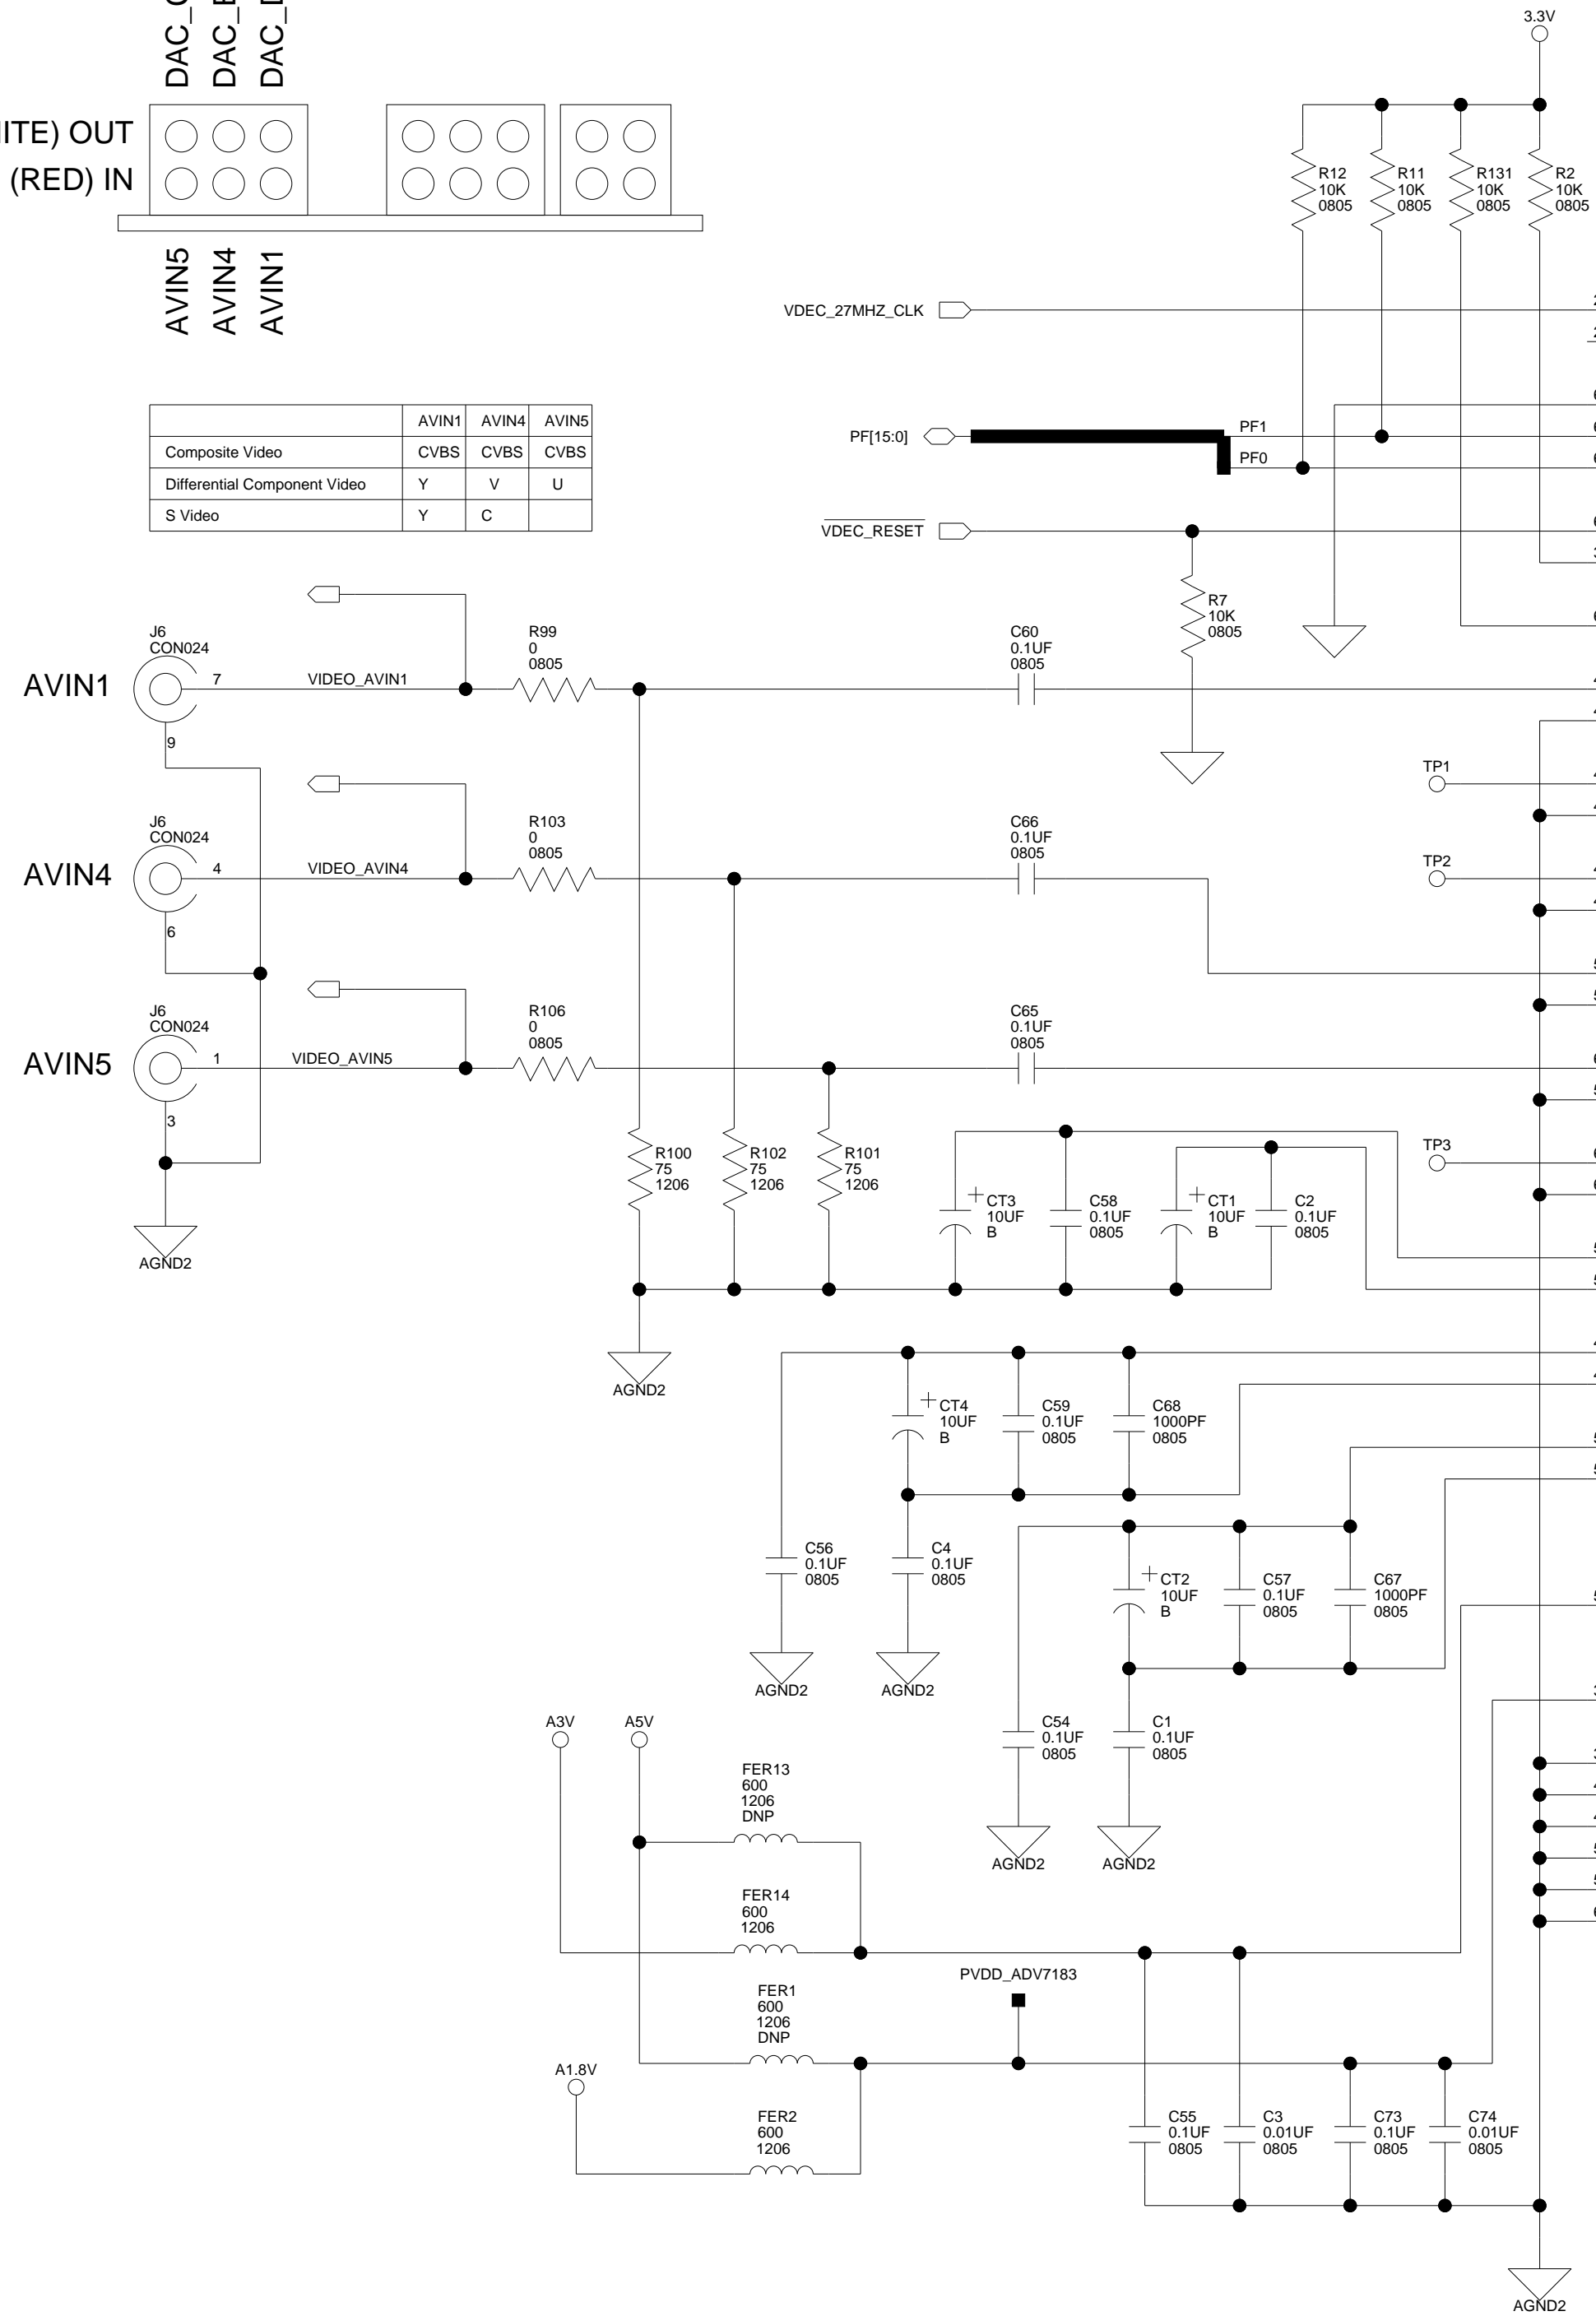

VIDEO DECODER

Note: Signal Names in brackets refer to ADV7183KST

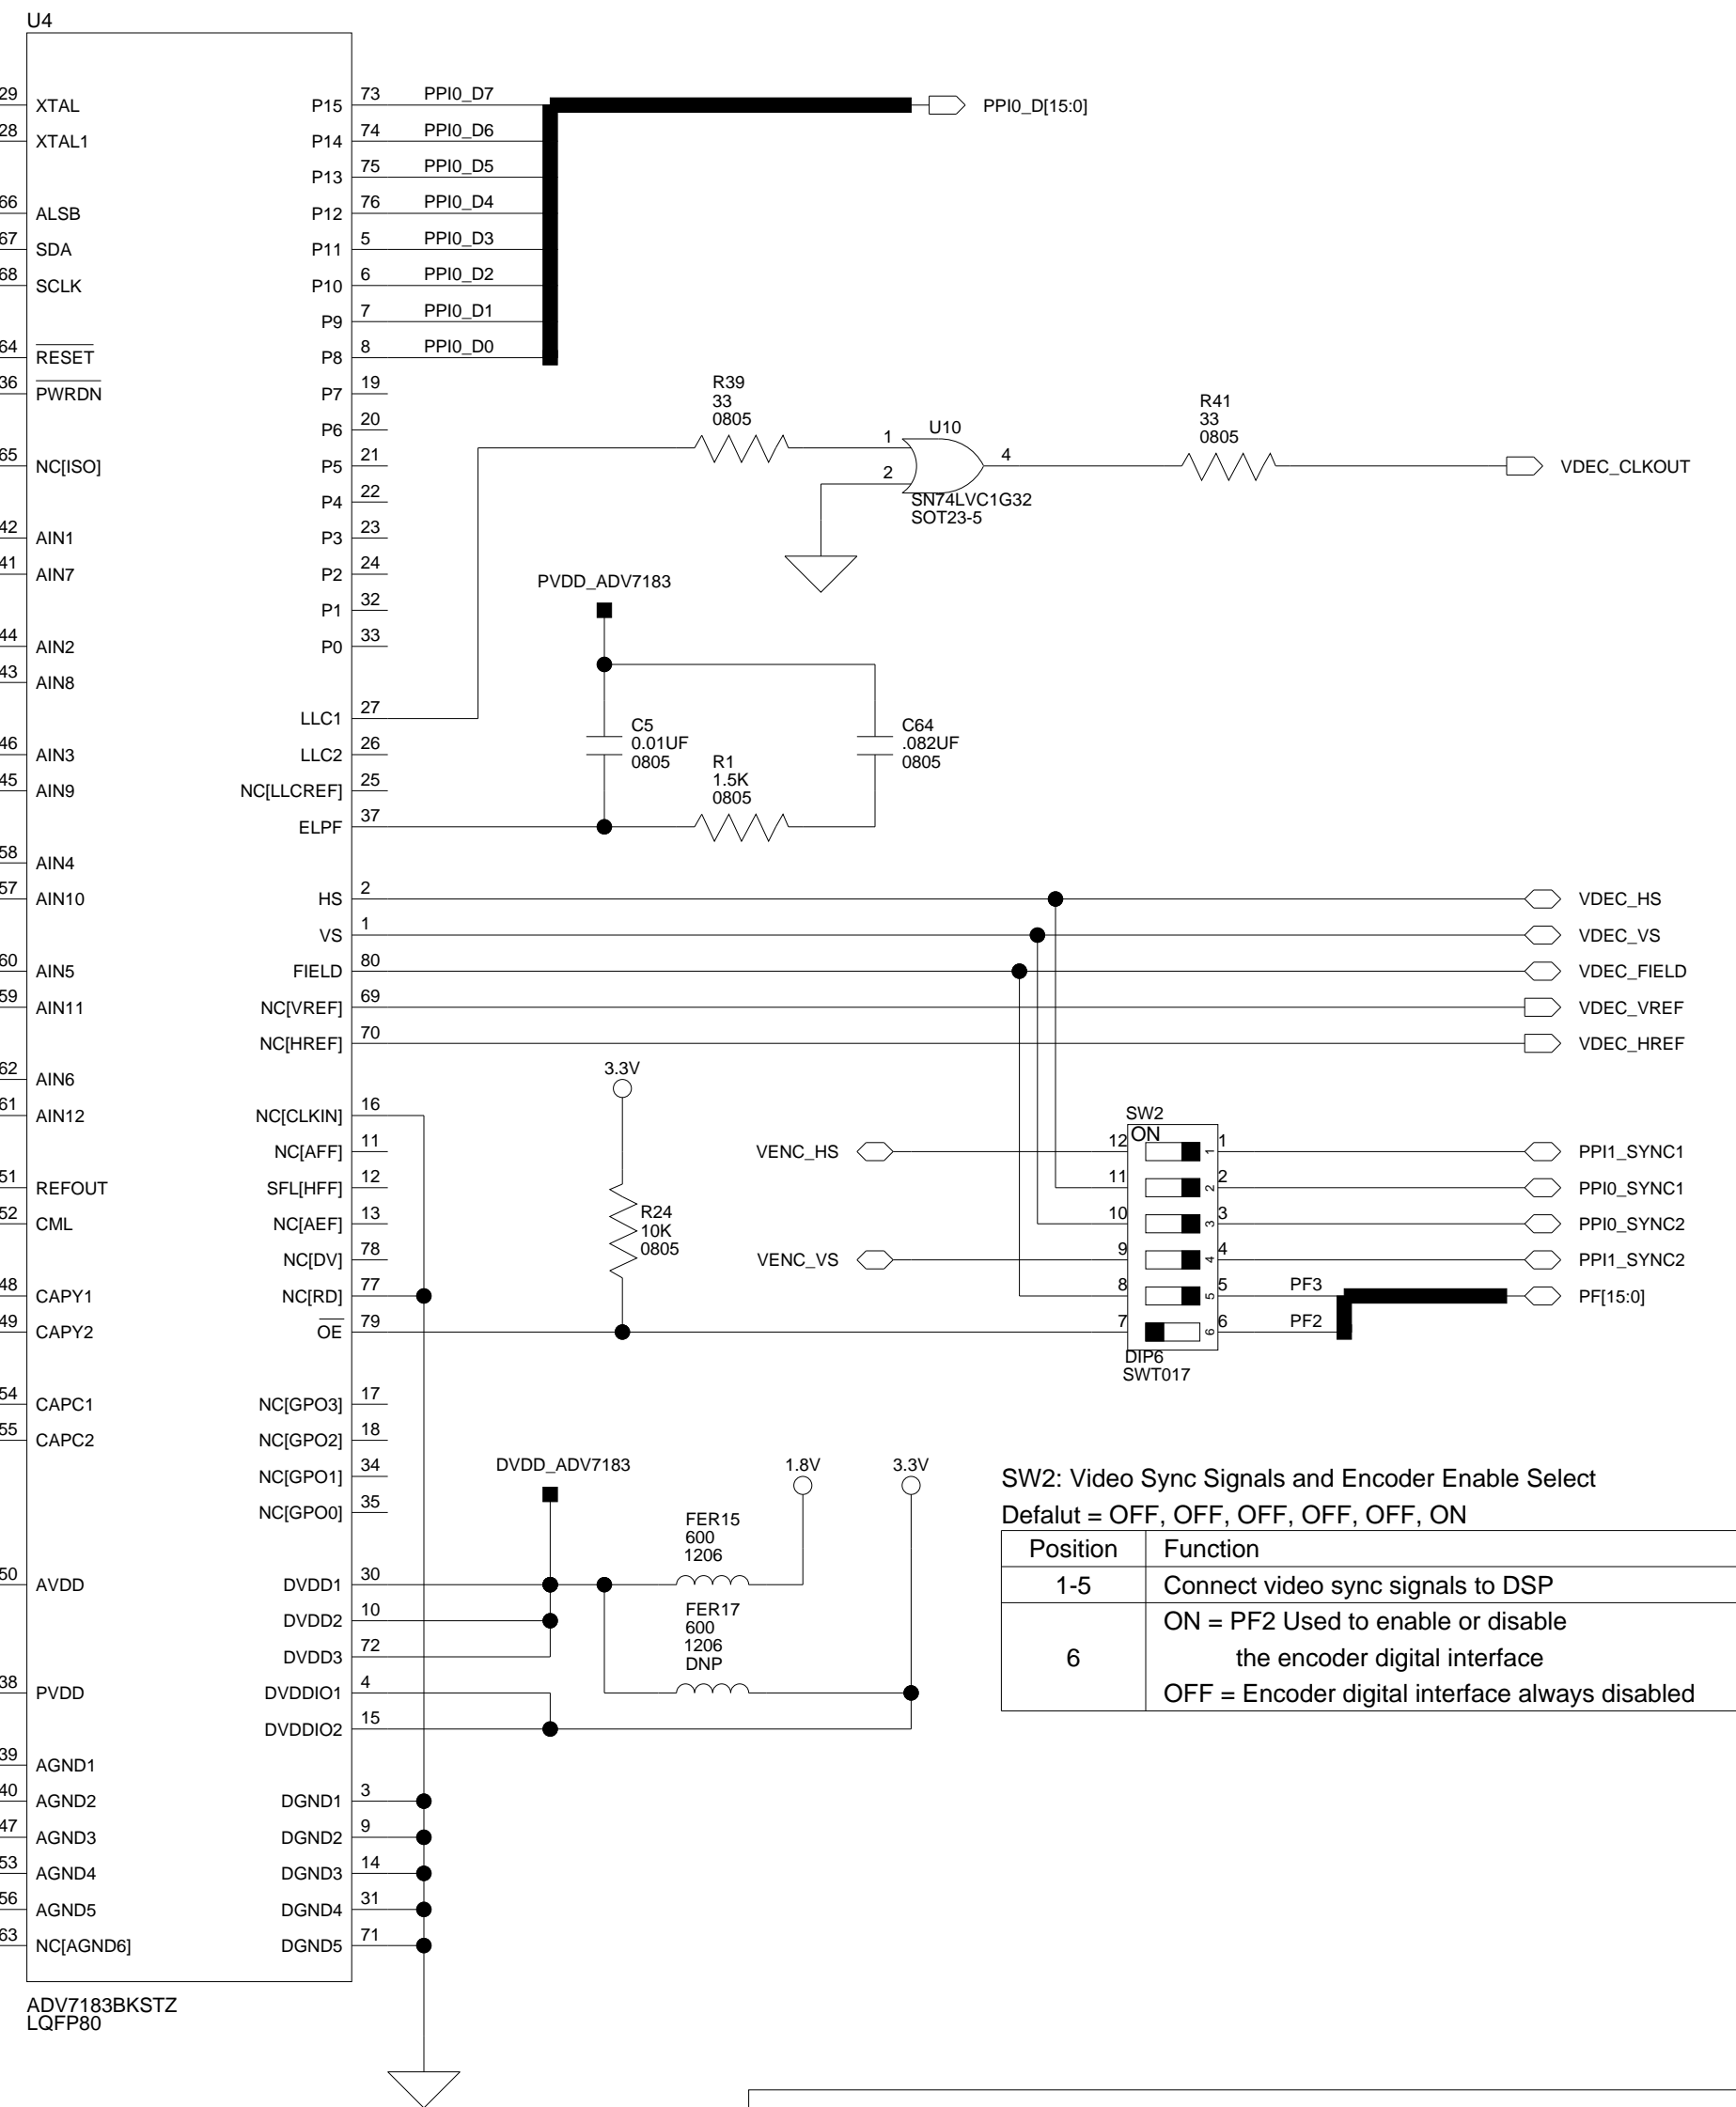


SW2: Video Sync Signals and Encoder Enable Select
Default = OFF, OFF, OFF, OFF, OFF, ON

Position	Function
1-5	Connect video sync signals to DSP
6	ON = PF2 Used to enable or disable the encoder digital interface OFF = Encoder digital interface always disabled

ANALOG DEVICES

20 Cotton Road
Nashua, NH 03063
PH: 1-800-ANALOGD

Title			ADSP-BF561 EZ-KIT LITE VIDEO DECODER (VIDEO IN)		
Size C	Board No.	A0185-2003		Rev	2.3
Date	11-7-2007_15:11	Sheet	10 of	14	

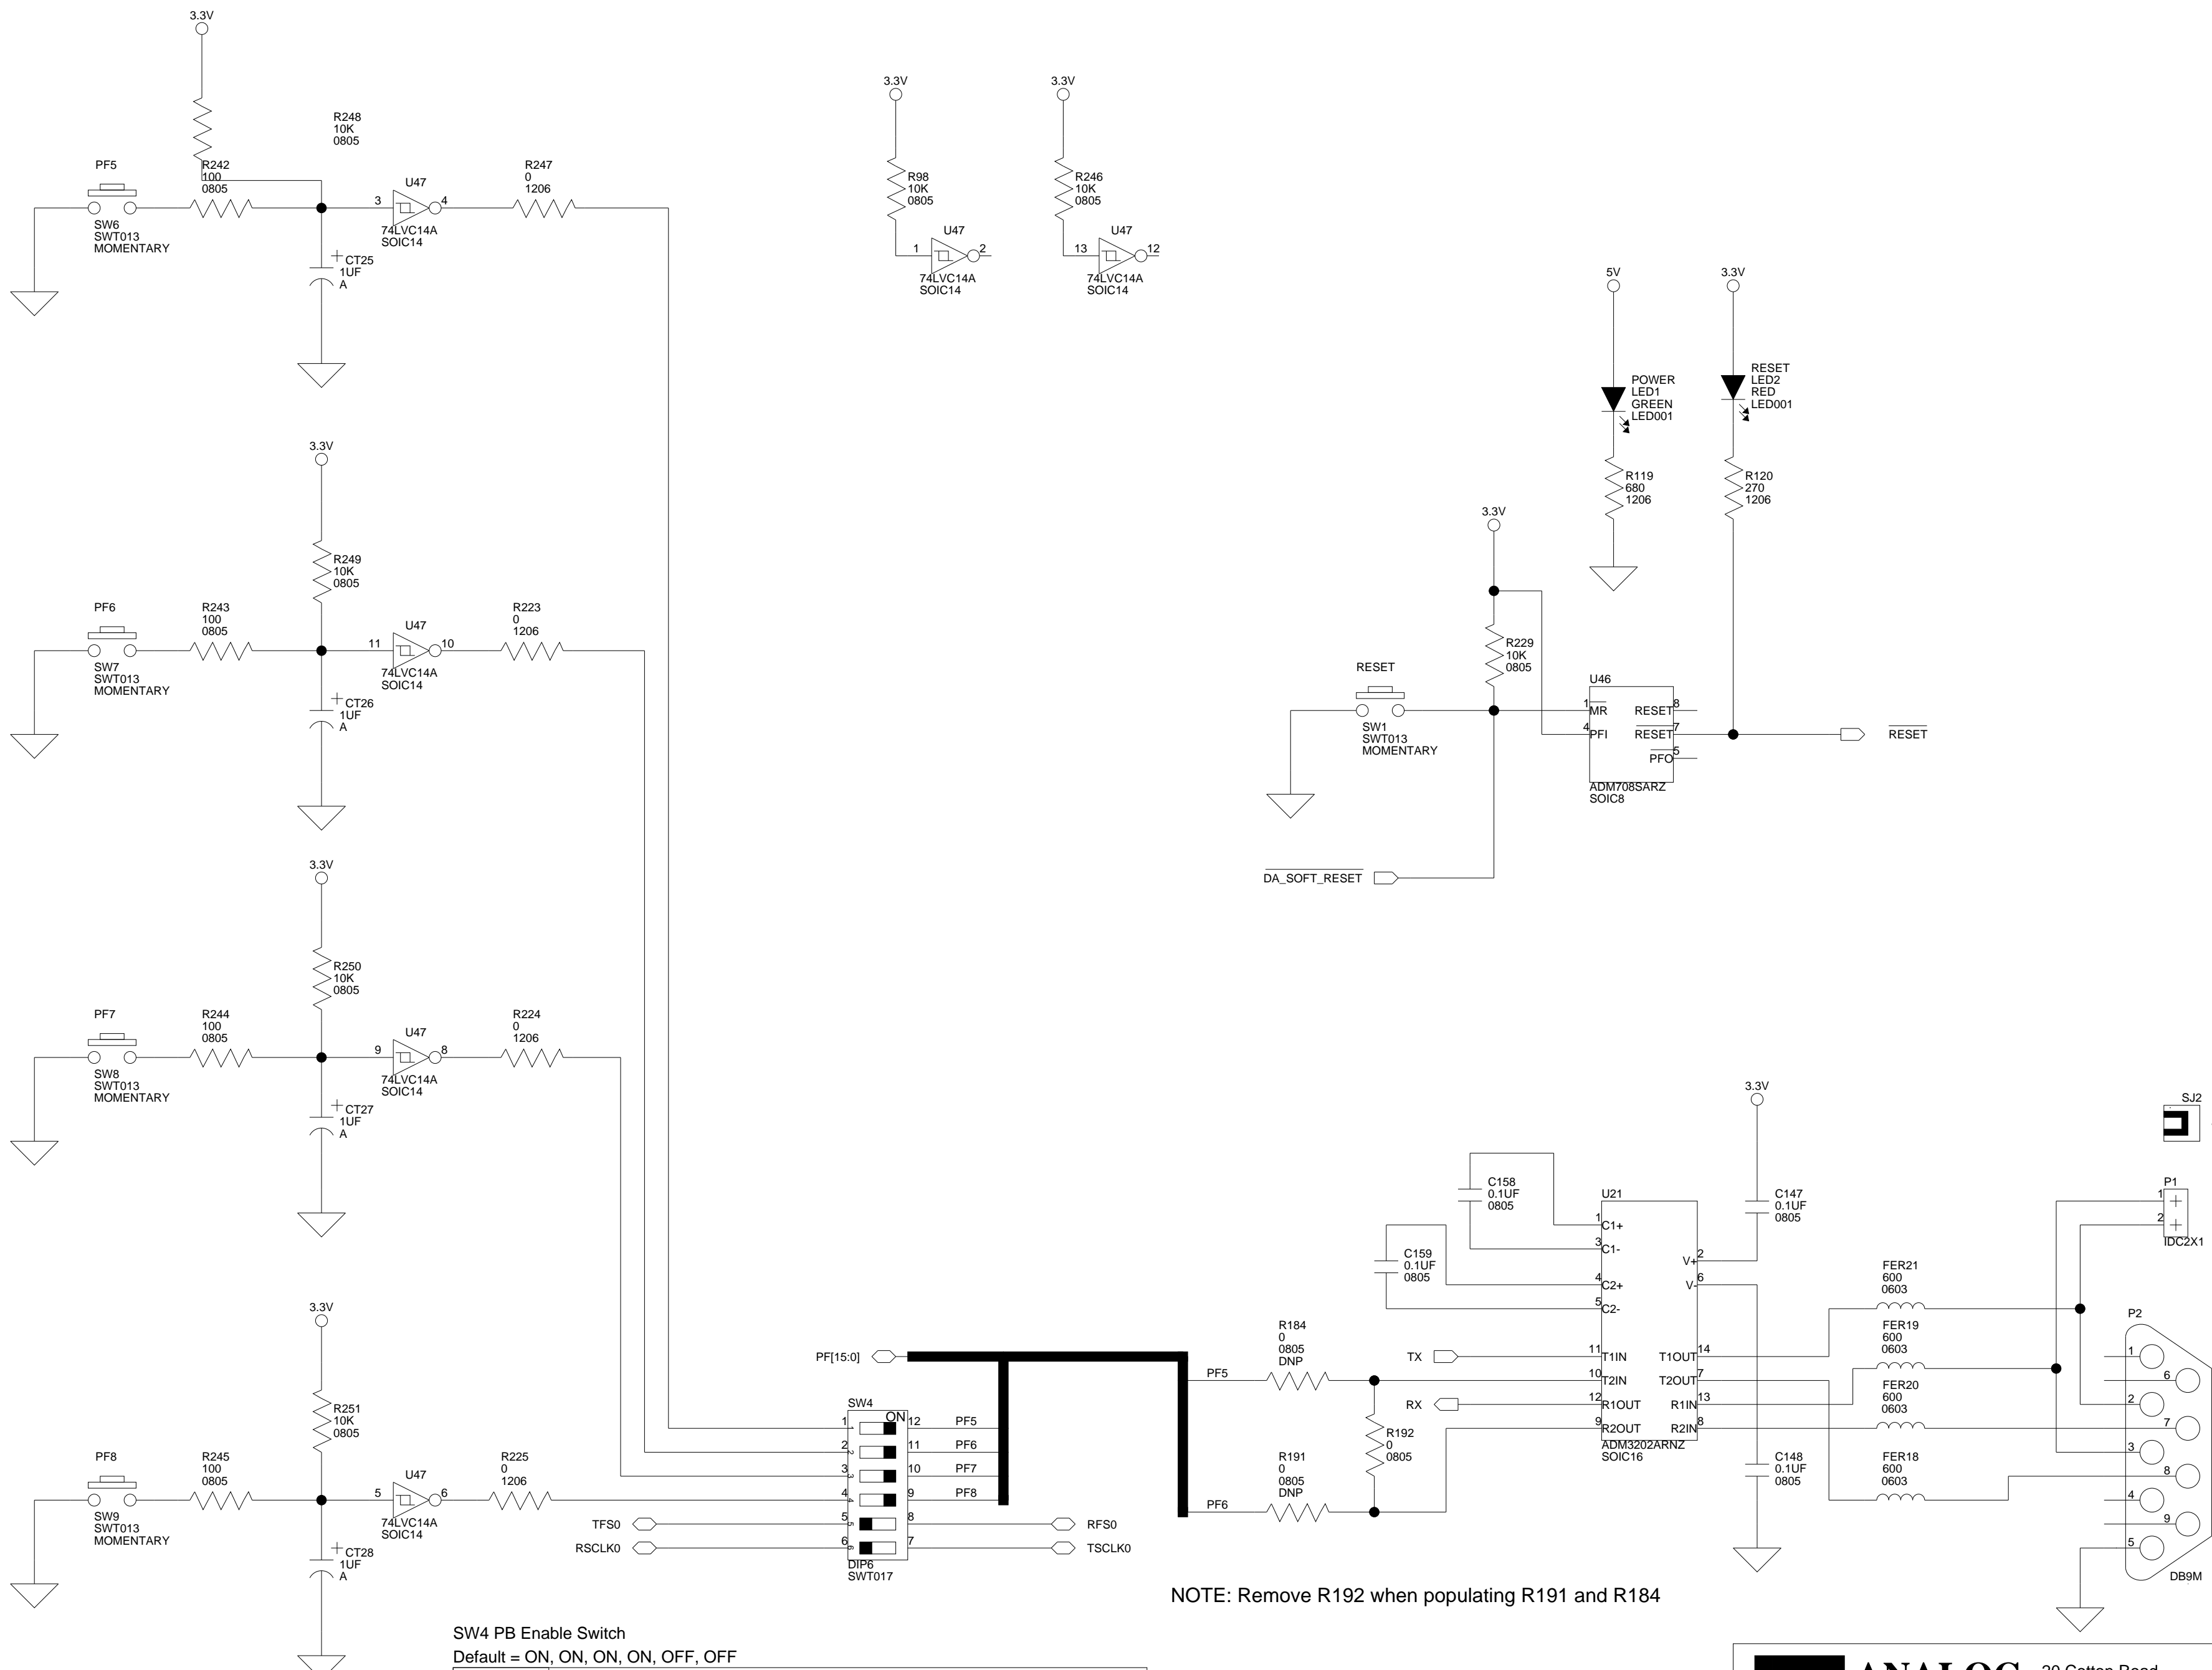

SW4 PB Enable Switch
 Default = ON, ON, ON, ON, OFF, OFF

Position	Function
1-4	Connects the push buttons to the Programmable Flags of the DSP Useful if using the PFs for another purpose.
5,6	OFF, OFF = AD1836A -> TDM Mode ON, ON = AD1836A -> I2S Mode

NOTE: Remove R192 when populating R191 and R184

SJ2 SHORTING JUMPER
 DEFAULT=NOT INSTALLED


UART


ANALOG DEVICES


20 Cotton Road
 Nashua, NH 03063
 PH: 1-800-ANALOGD

Title ADSP-BF561 EZ-KIT LITE RESET, PUSH-BUTTON SWITCHES, UART		
Size C	Board No. A0185-2003	Rev 2.3
Date 11-7-2007_16:46	Sheet 11 of 14	


EXPANSION INTERFACE (TYPE B)

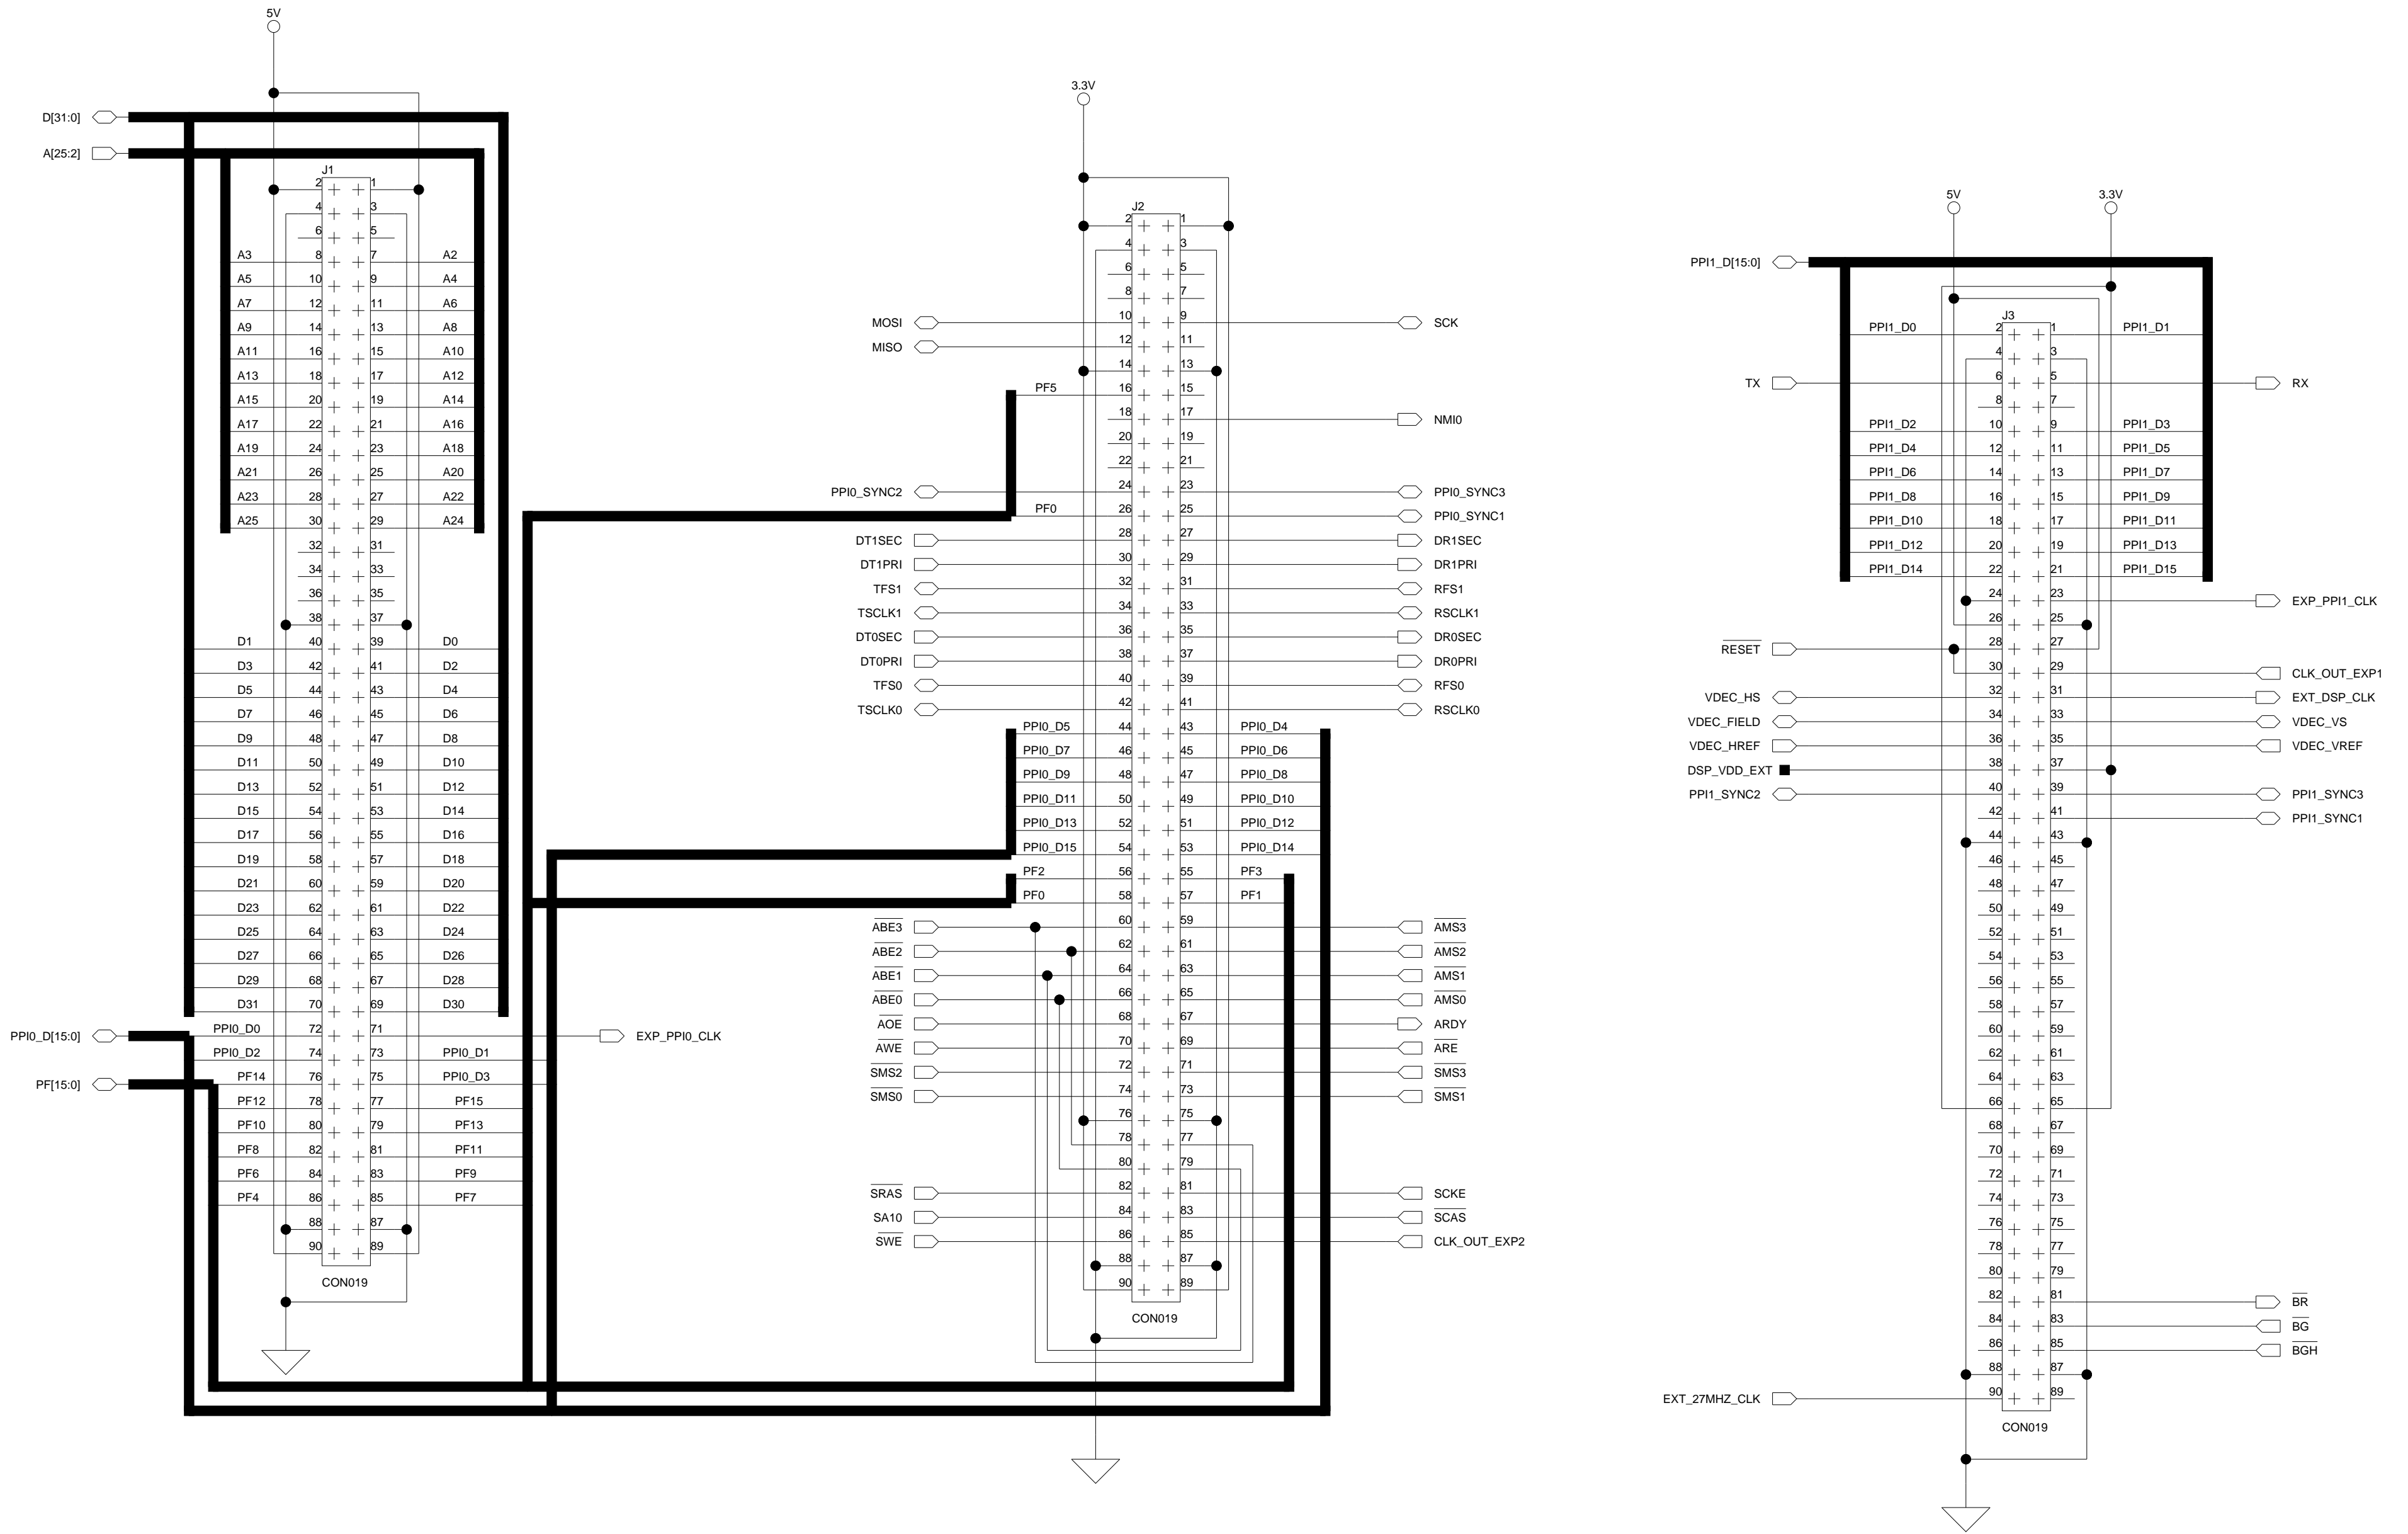


 ANALOG DEVICES		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
		Title ADSP-BF561 EZ-KIT LITE EXTENDER CARD CONNECTORS	
Size C	Board No.	A0185-2003	
Date	11-7-2007_15:11	Sheet	12 of 14
		Rev	2.3

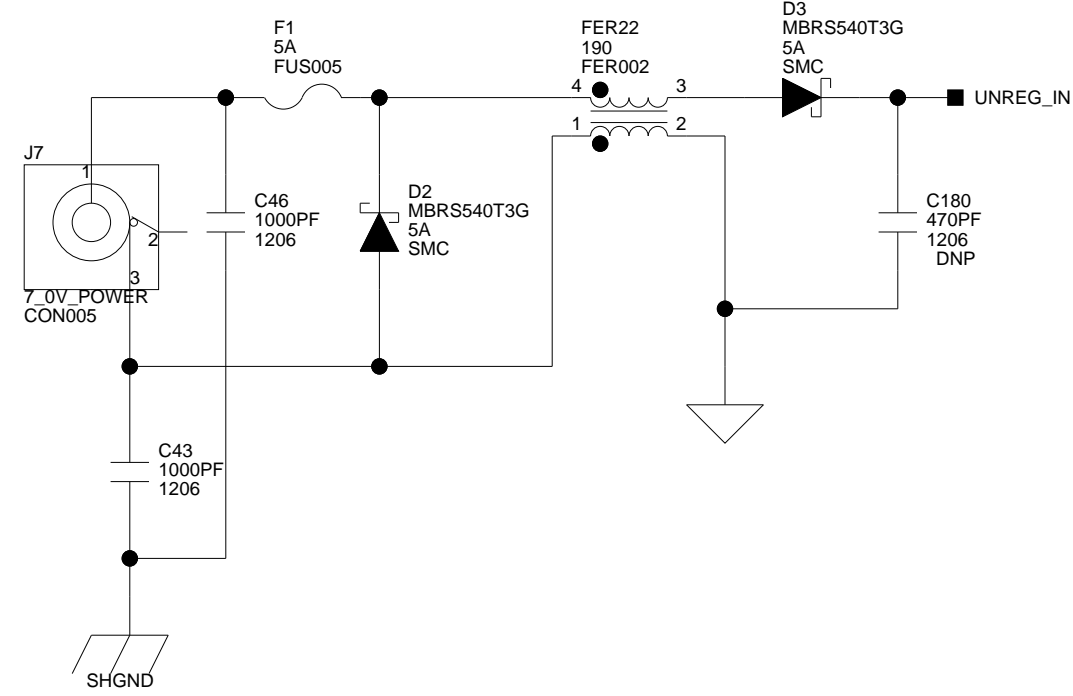






Current 500mA

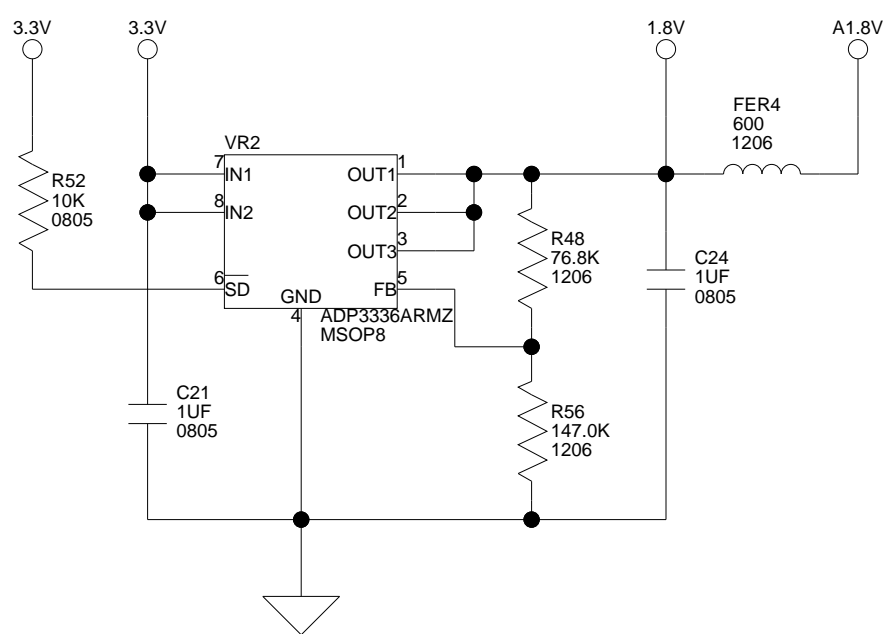



Current 1.5A

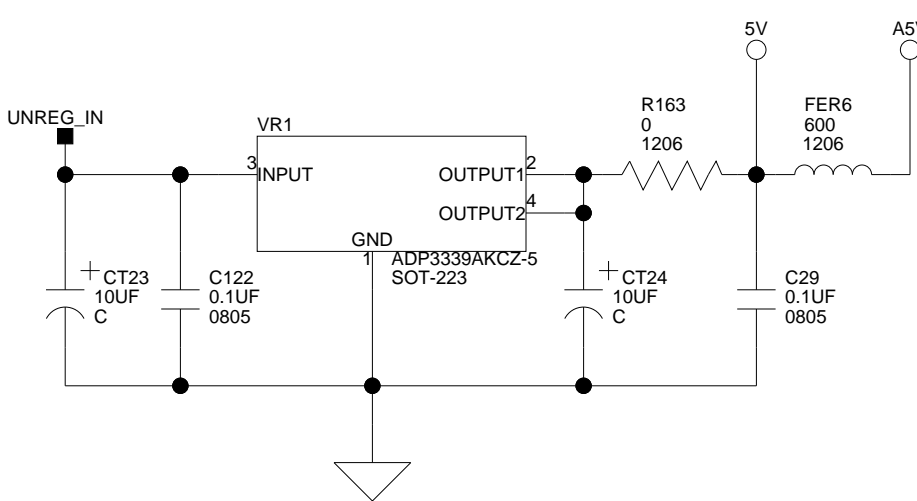


Current 1A

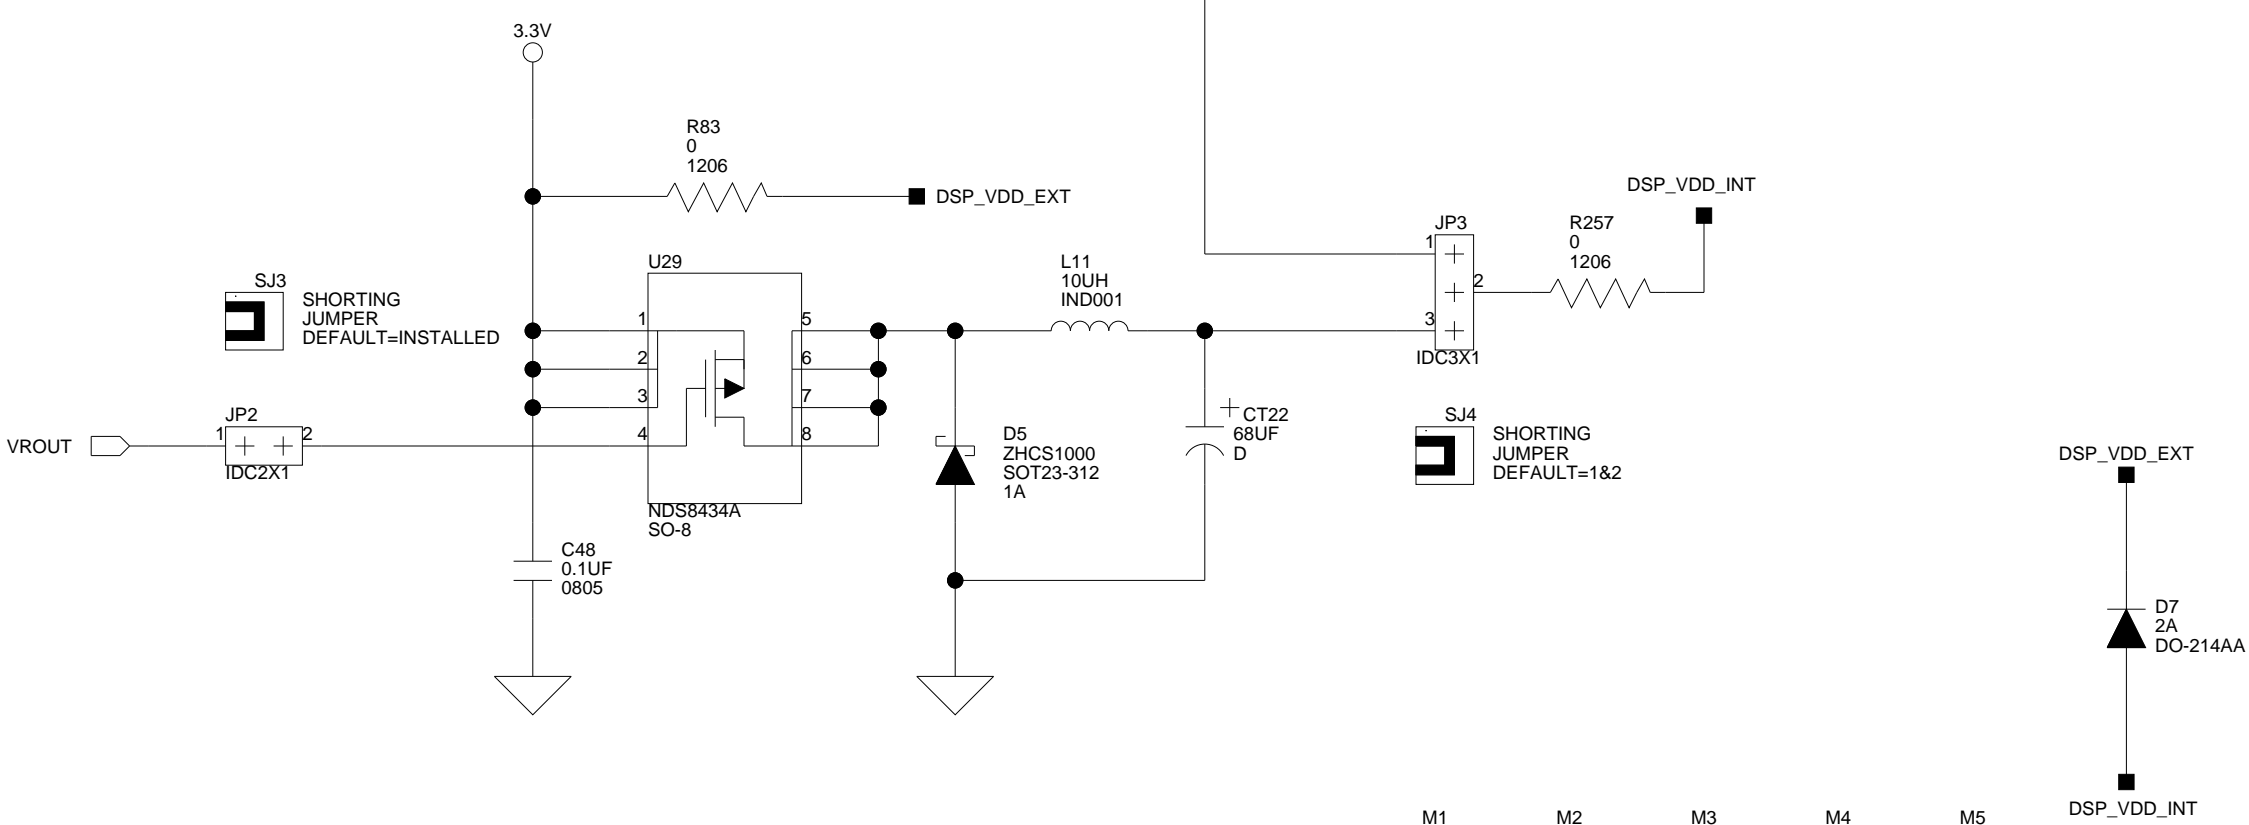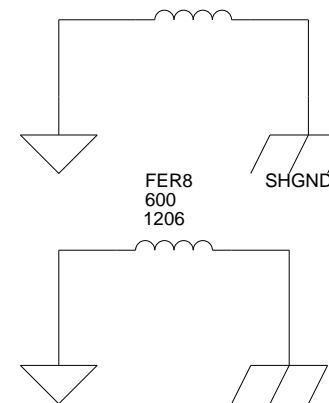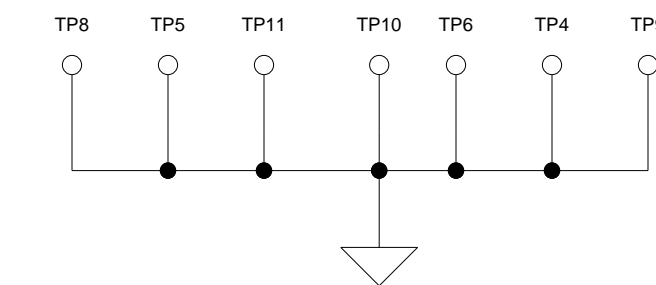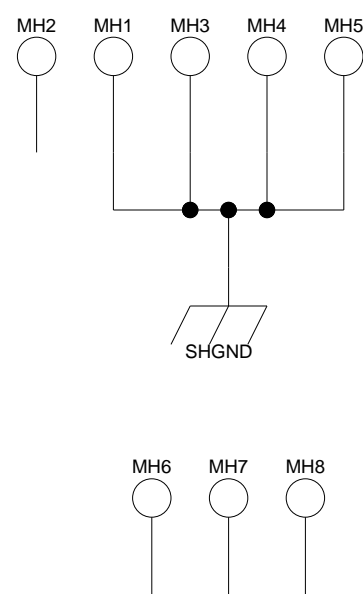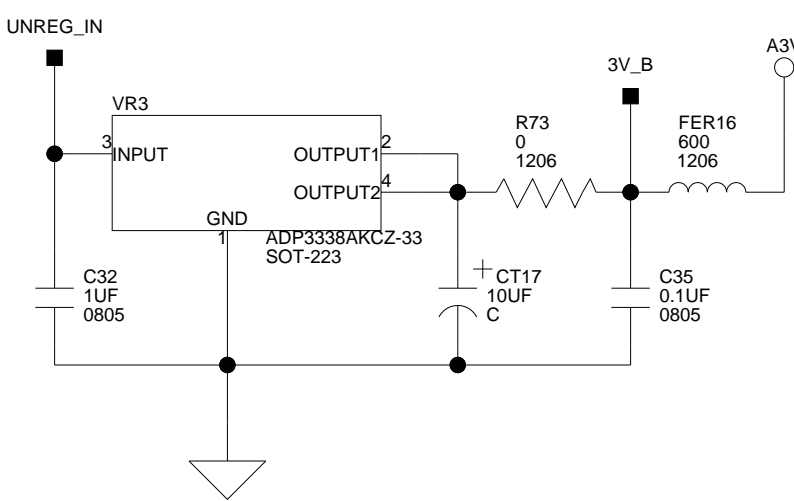
































Current 1.5A

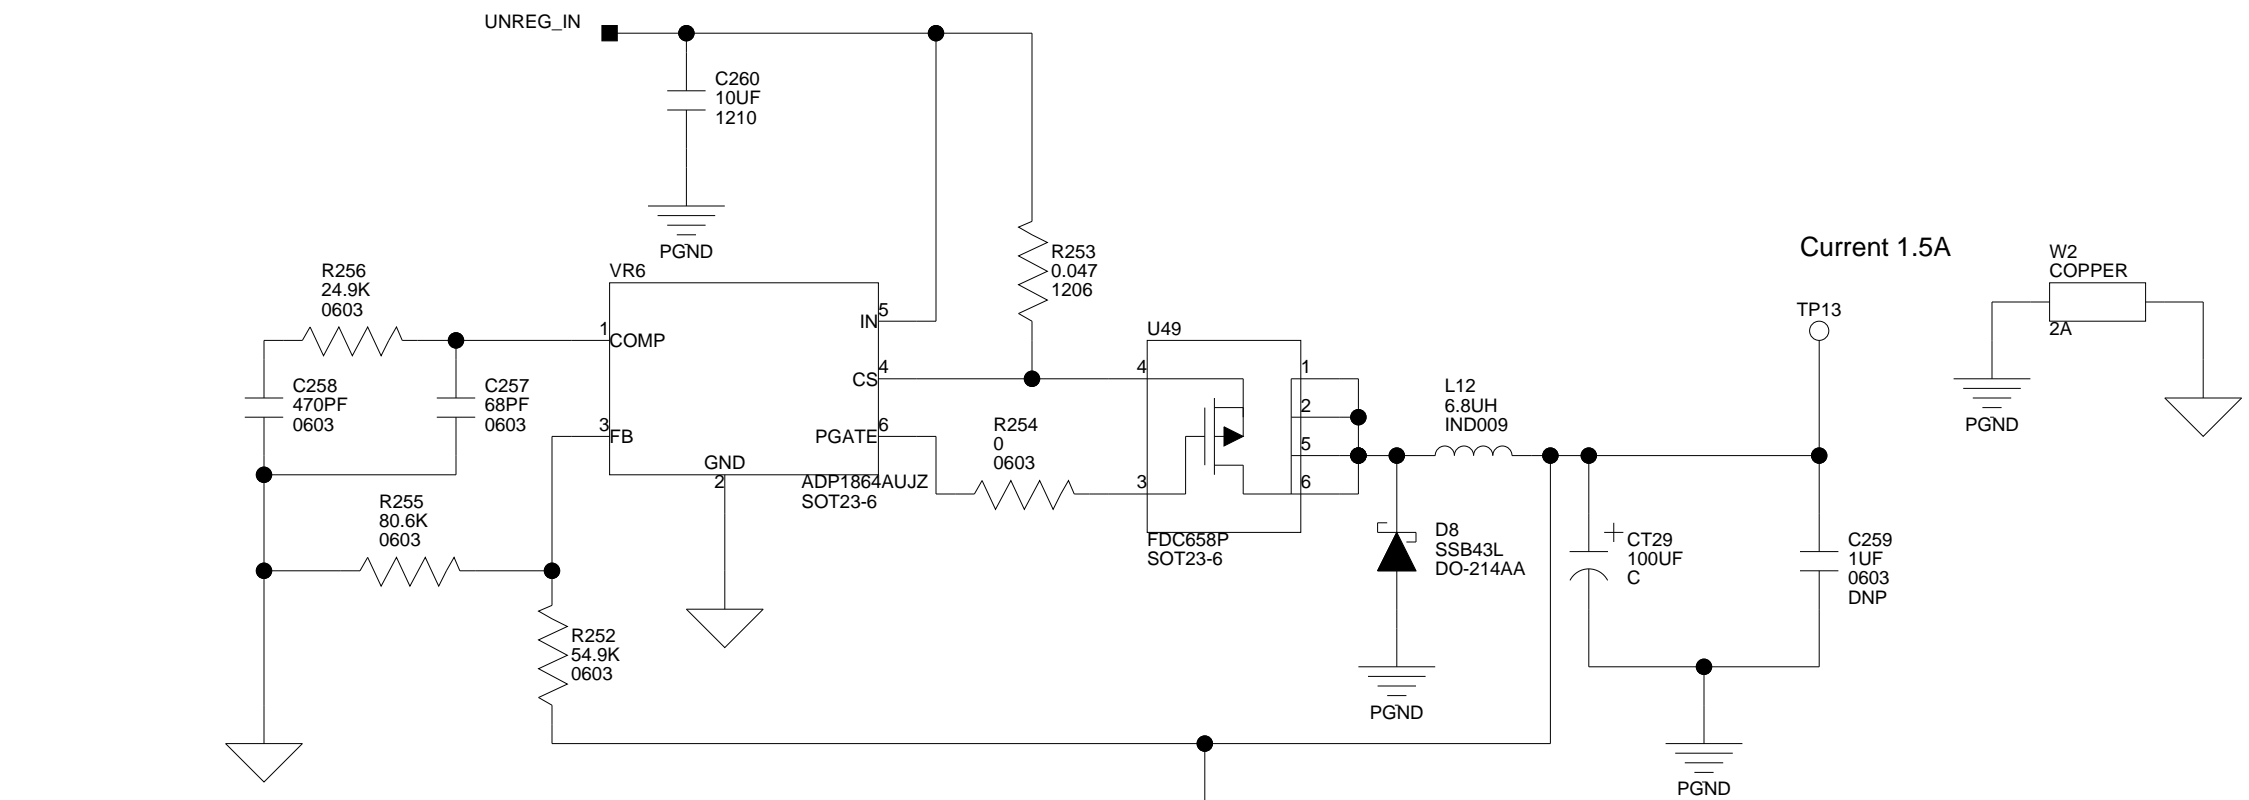


Current 2A



		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
		Title ADSP-BF561 EZ-KIT LITE POWER	
Size C	Board No.	Rev	2.3
Date	11-7-2007_16:46	Sheet	13 of 14

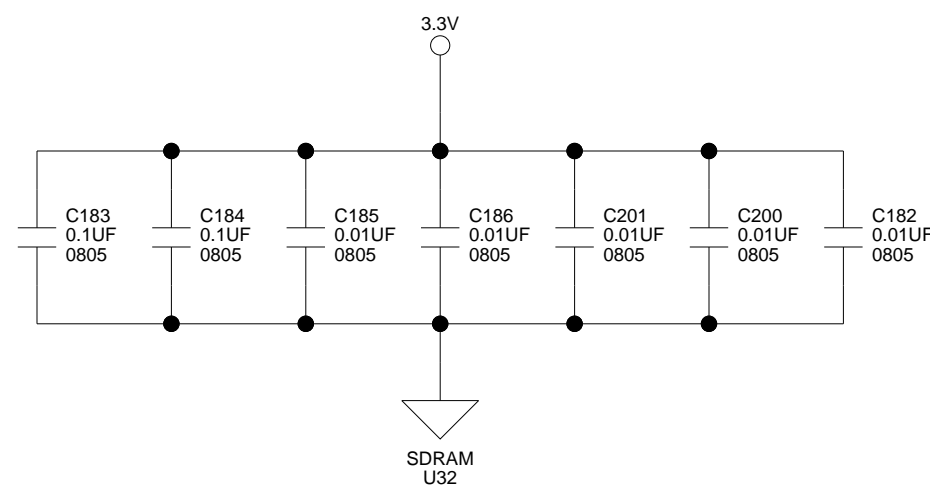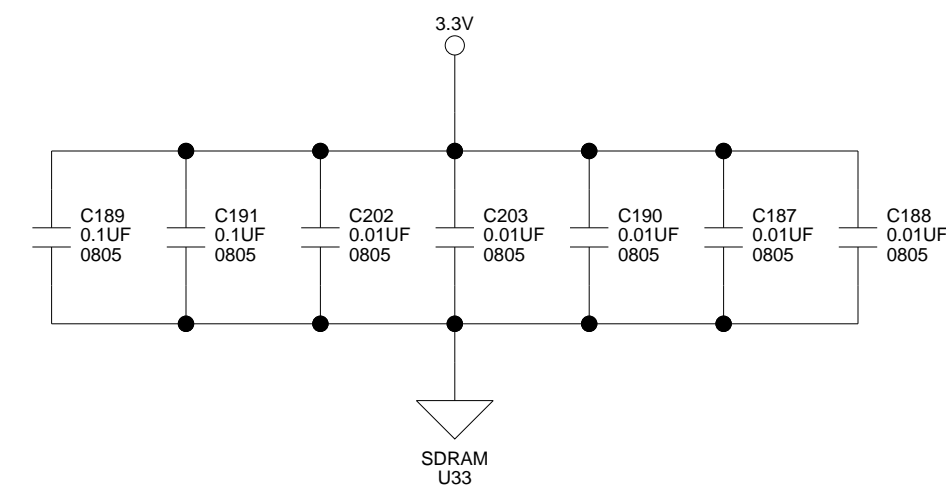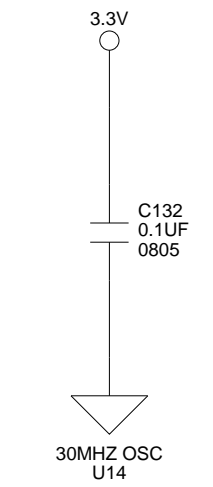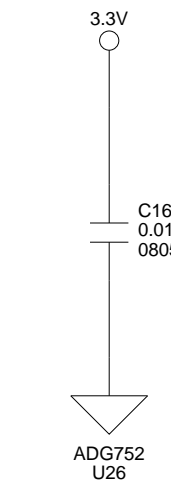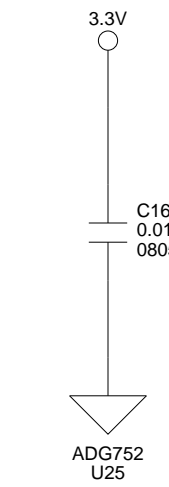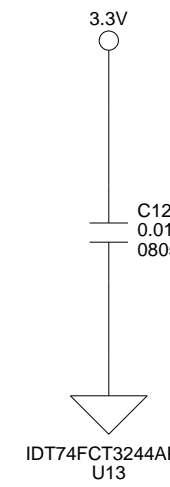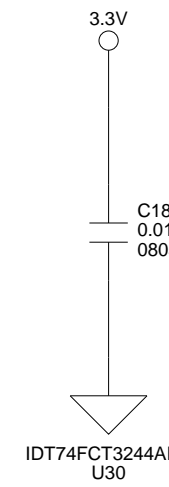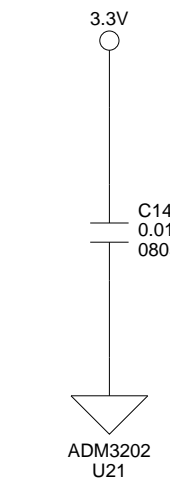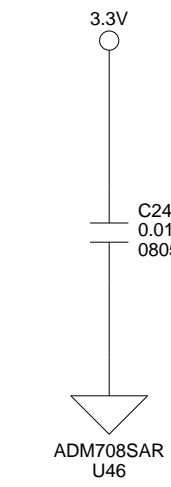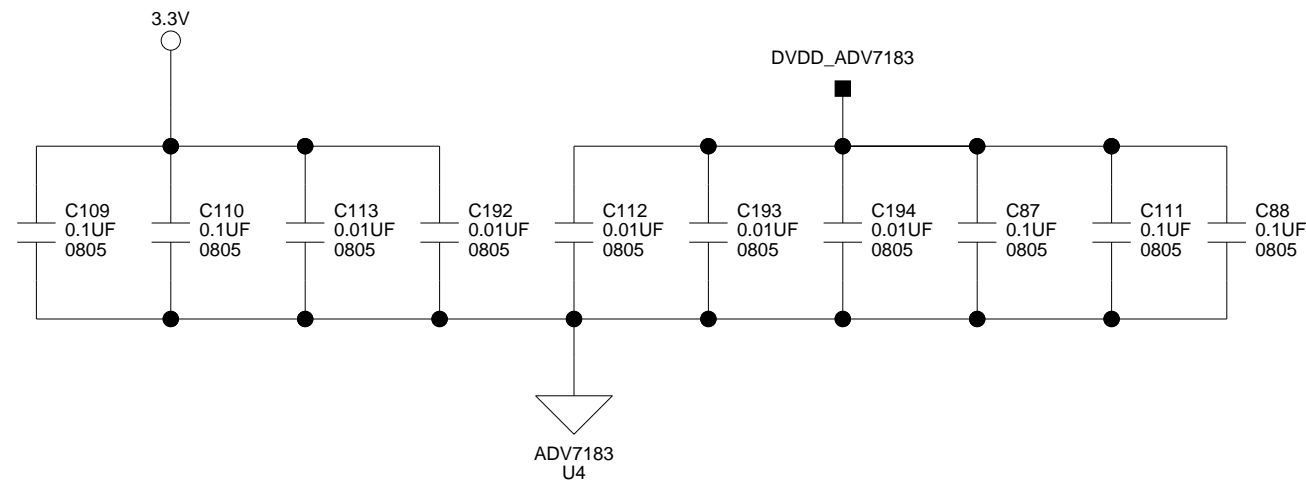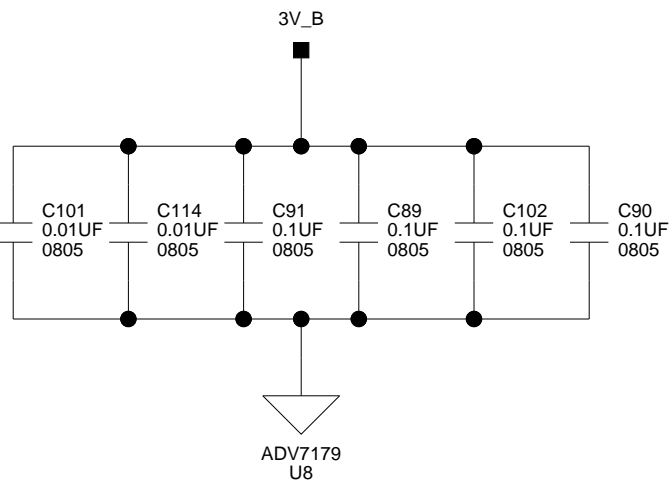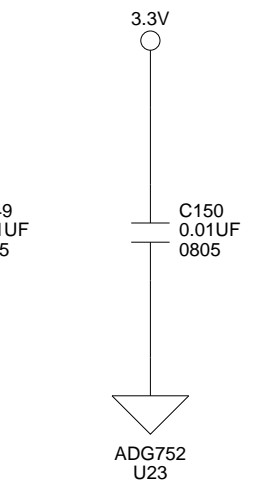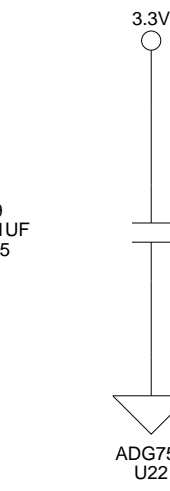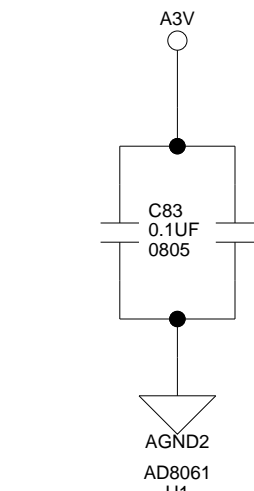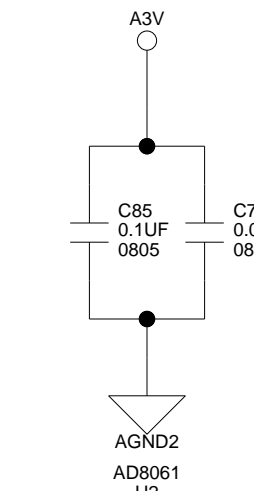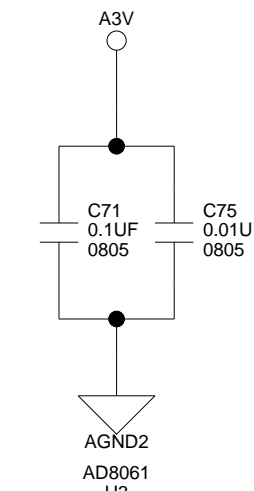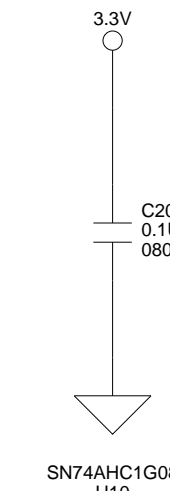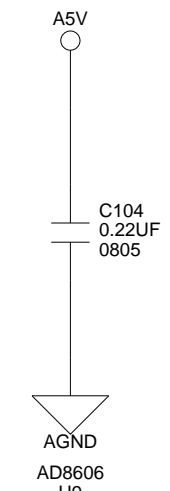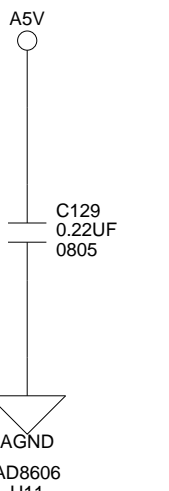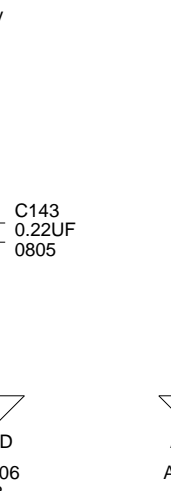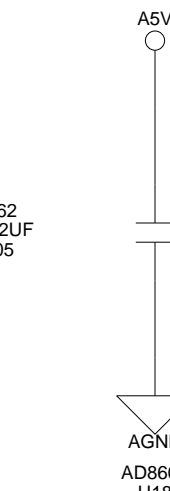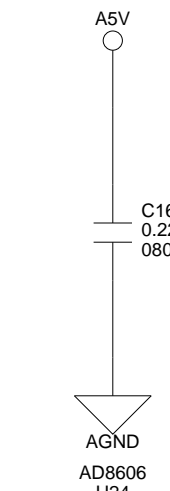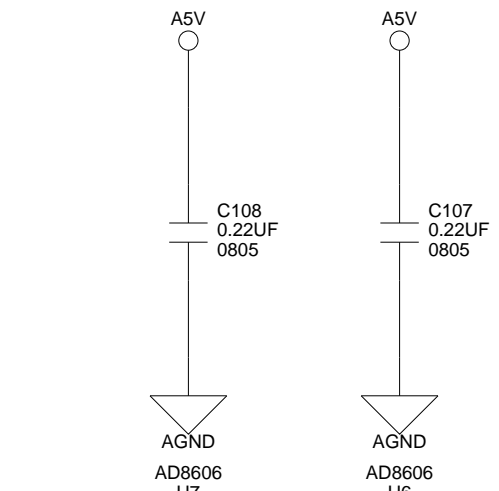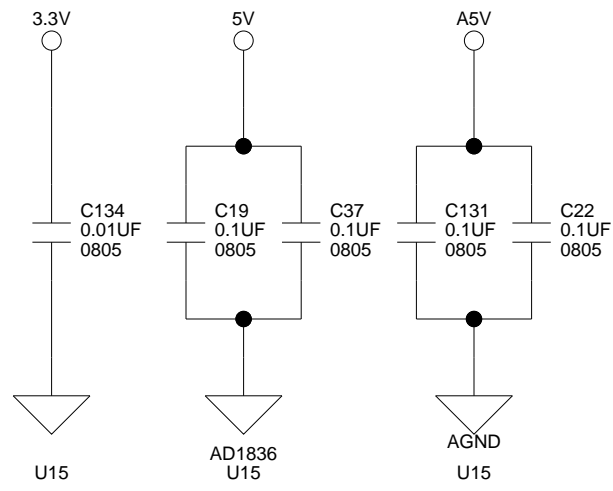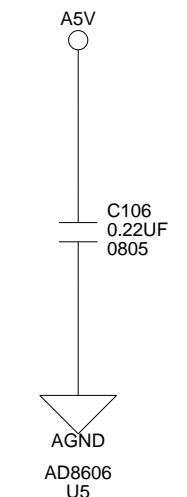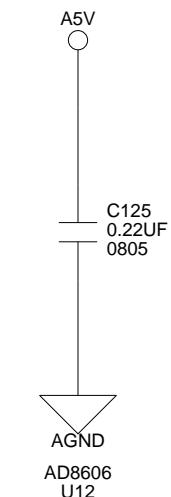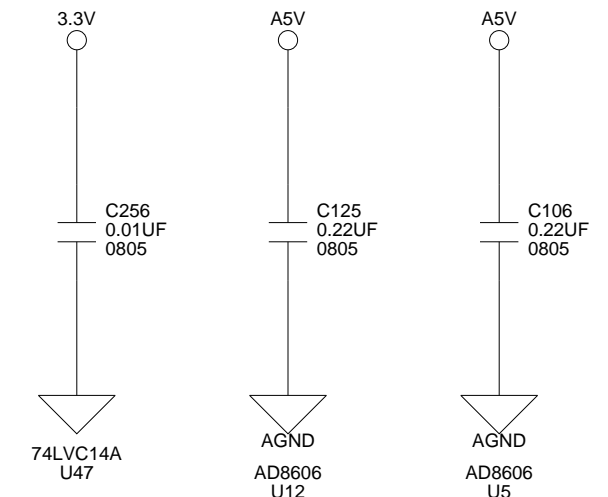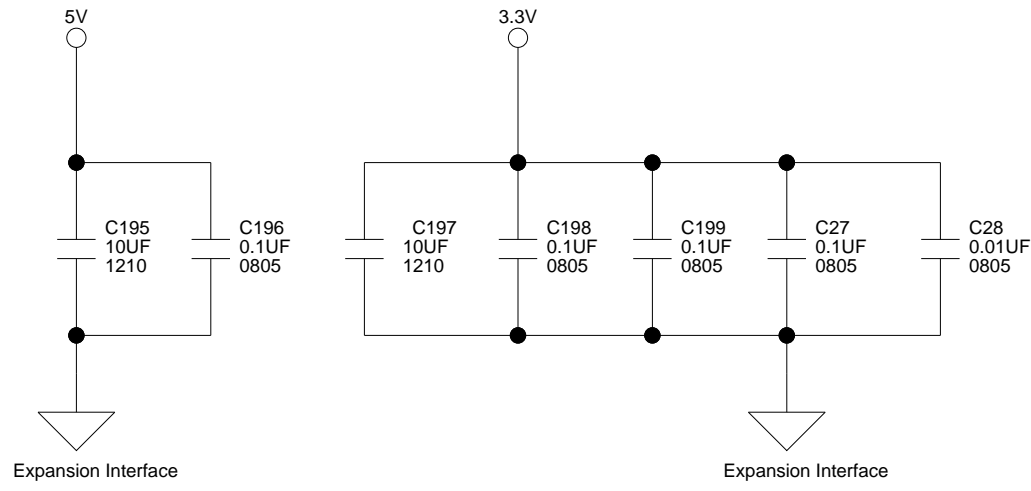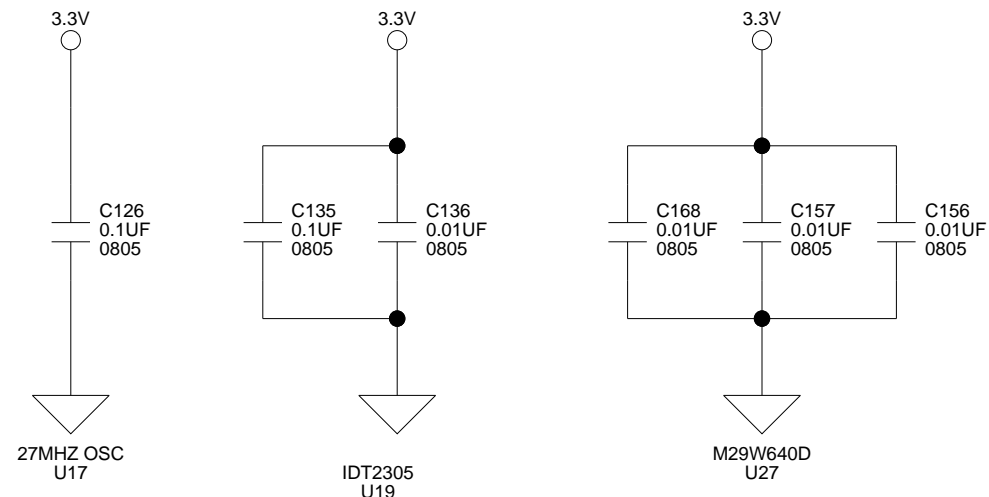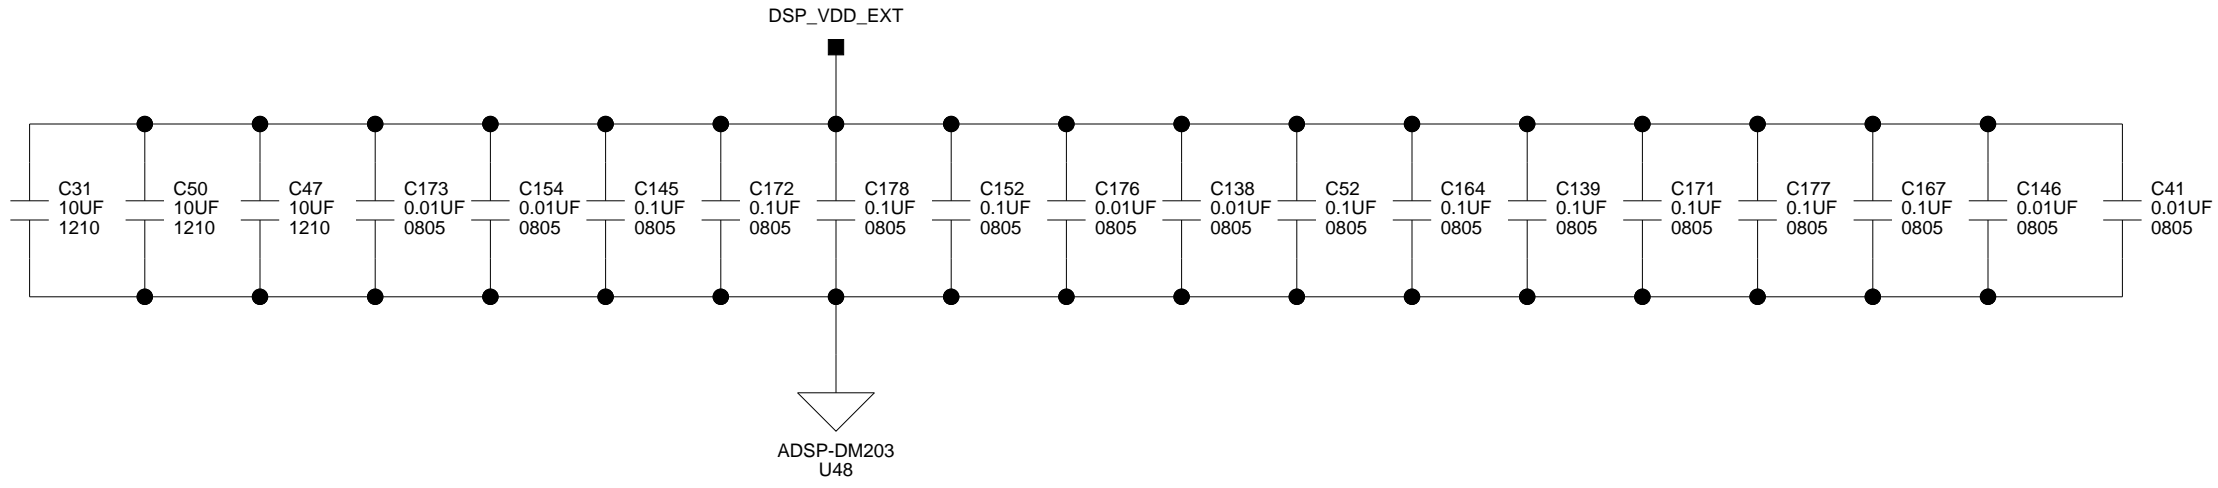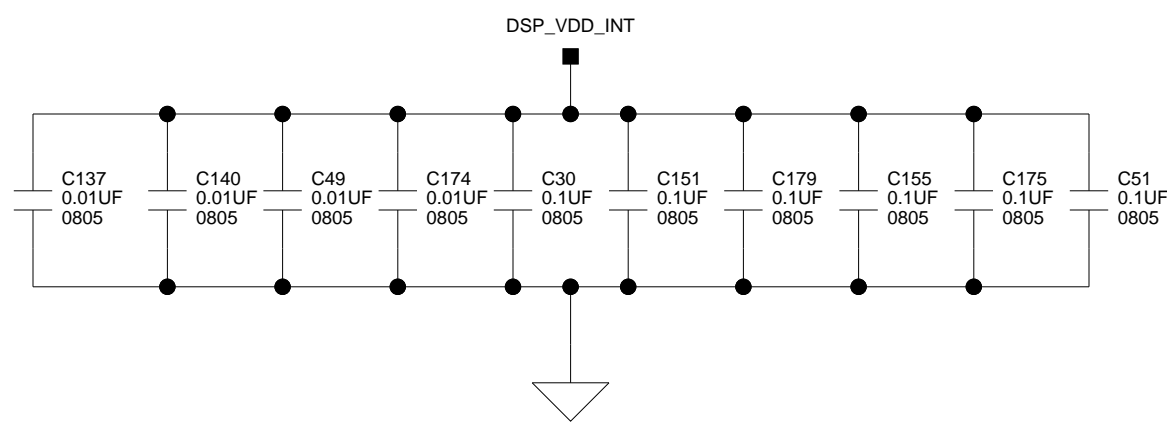

 ANALOG DEVICES		20 Cotton Road Nashua, NH 03063 PH: 1-800-ANALOGD	
		Title ADSP-BF561 EZ-KIT LITE DECOUPLING CAPS	
Size C	Board No. A0185-2003	Rev 2.3	
Date 11-7-2007_15:11	Sheet 14 of 14		

I INDEX

Numerics

2-wire interface (TWI) mode, [1-11](#), [1-13](#), [2-12](#)

A

A25-2 address bus pins, [2-3](#)

AD1836A audio codecs, [1-11](#), [2-3](#), [2-4](#), [2-12](#)

ADV7179 video encoders

video interface, [1-12](#)

clock select jumper (JP1), [2-14](#)

configuration switch (SW2), [2-10](#)

PPI1 interface, [2-6](#), [2-7](#)

programmable flags, [2-4](#)

reset, [1-12](#)

ADV7183A video decoders

video interface, [1-12](#)

clock select switch (SW5), [2-13](#)

configuration switch (SW2), [2-10](#)

PPI0 interface, [2-6](#), [2-8](#)

programmable flags, [2-4](#)

reset, [1-12](#)

AIN1/4/5 analog video channels, [2-8](#)

~AMS0 memory select pins, [1-8](#)

analog

audio interface, *See* SPORT0

video interface, *See* video interface

architecture, of this EZ-KIT Lite, [2-2](#)

ASYNCR (asynchronous memory control) banks,
[1-7](#)

audio

codecs, *See* AD1836A

connectors (J4-5), [2-19](#)

enable switch (SW12), [2-13](#)

interface, *See* SPORT

B

background telemetry channel (BTC), [1-14](#)

bill of materials, [A-1](#)

BMODE1-0 (boot mode select) pins, [2-11](#)

board schematic (ADSP-BF561), [B-1](#)

boot mode select switch (SW3), [2-11](#)

C

clock select switch, of PPIs (SW5), [2-13](#)

codecs, *See* AD1836A

configuration, of this EZ-KIT Lite, [1-3](#)

connectors

diagram of locations, [2-18](#)

DB9 (UART), [xii](#), [2-8](#)

J1-3 (expansion), [2-9](#), [2-19](#)

J4-5 (audio), [2-19](#)

J6 (video), [2-19](#)

J7 (power), [2-20](#)

P2 (RS-232), [xi](#), [2-20](#)

P3 (SPORT1), [2-3](#), [2-20](#)

P5 (SPI), [2-3](#), [2-14](#), [2-21](#)

P9 (SPORT0), [2-20](#)

ZP4 (JTAG), [2-21](#)

contents, of this EZ-KIT Lite package, [1-2](#)

INDEX

core

- clock rate, [2-2](#), [2-14](#)
- frequency, [1-9](#)
- voltage, [2-2](#)

customer support, [xiv](#)

D

DAC A/B/C analog audio channels, [2-7](#)

DB9 (UART) connector, [xii](#), [2-8](#), [2-20](#)

default configuration, of this EZ-KIT Lite, [1-3](#)

DIP switches

- diagram of locations, [1-3](#), [2-10](#)
- SW10-11 (test), [2-13](#)
- SW2 (video config), [1-12](#), [2-8](#)
- SW4 (push button enable), [1-11](#), [2-12](#), [2-16](#)

E

EBIU

- address bus (A25-2) pins, [2-3](#)
- control signals, [2-3](#), [2-9](#)

EBIU_SDBCTL register, [1-9](#)

EBIU_SDGCTL register, [1-9](#)

EBIU_SDRRC register, [1-9](#), [1-10](#)

example programs, [1-13](#)

expansion interface, [2-3](#), [2-8](#), [2-19](#)

external bus interface unit, *See* EBIU

external memory

See also flash memory, SDRAM

memory map, [1-7](#)

via JTAG, [2-9](#)

EZ-KIT Extender boards, [2-7](#)

F

features, of this EZ-KIT Lite, [x](#)

FIELD (ADV7183A) control signal, [2-4](#), [2-8](#),
[2-11](#)

FIO0_FLAG_D registers, [1-10](#)

FIO2_DIR register, [1-10](#)

FIO2_FLAG_C/D/S/T registers, [1-10](#)

flag pins, *See* programmable flags (PFs)

flash

memory, [2-3](#), [2-11](#)

ports (PB47-32), [2-17](#)

frequency, [1-9](#)

G

general-purpose IO pins, [1-10](#), [2-4](#), [2-12](#), [2-16](#)

GND signals, [2-9](#)

H

Help, online, [xix](#)

HSYNC signals, [2-6](#), [2-7](#)

I

input clocks, [1-12](#), [2-2](#), [2-6](#), [2-7](#)

installation, of this EZ-KIT Lite, [1-5](#)

interfaces, *See* video, SPORT0, SPI, expansion

internal memory

See also SRAM

map of the processor, [1-8](#)

internal voltage (VDDINT), [2-14](#)

IO voltage, [2-2](#)

J

JTAG

connector (ZP4), [2-9](#), [2-21](#)

emulation port, [2-9](#)

jumpers

JP1 (ADV7179 clock select), [2-14](#)

JP2-3 (VDDINT source select), [2-14](#)

P1 (UART loop), [2-15](#)

L

LEDs

- diagram of locations, [1-3](#), [2-15](#)
- LED13-20 (PF39-32), [1-10](#), [2-5](#), [2-17](#)
- LED1 (power), [2-16](#)
- LED2 (chip reset), [2-17](#)
- LED5-12 (PF47-40), [1-10](#), [2-5](#), [2-17](#)
- ZLED3 (USB monitor), [1-5](#), [2-17](#)

license restrictions, [1-7](#)

M

Media Instruction Set Computing (MISC), [ix](#)

memory

- map, of this EZ-KIT Lite, [1-7](#)
- select pins, *See* ~AMS2-0, ~SMS0

N

notation conventions, [xx](#)

O

~OE (ADV7183A) signal, [2-4](#), [2-10](#)

oscillators, [2-7](#), [2-13](#)

P

P3 (SPORT0) connector, [2-3](#)

package contents, [1-2](#)

parallel peripheral interfaces (PPIs), [1-13](#), [2-6](#),
[2-10](#), [2-19](#)

See also PPI0, PPI1

PB47-32 flash ports, [2-17](#)

power

- connector (J7), [2-20](#)

- LED (LED1), [2-16](#)

PPI0_D15-8 bits, [1-10](#), [2-5](#)

PPI0 interface

- to ADV7183A decoder, [1-12](#), [2-8](#)

- clock select pin, [2-7](#), [2-8](#)

- D15-8 bits, [2-17](#)

- D7-0 bits, [2-6](#)

- SYNC2-1 signals, [2-6](#), [2-8](#), [2-11](#)

PPI0_SYNC2-1 synchronization signals, [2-8](#),
[2-11](#)

PPI1_D15-8 bits, [1-10](#), [2-5](#)

PPI1 interface

- to ADV7179 video encoder, [1-12](#), [2-7](#)

- clock select pin, [2-7](#)

- D15-8 bits, [2-17](#)

- D7-0 bits, [2-6](#), [2-7](#)

- HSYNC signals, [2-7](#)

- SYNC2-1 signals, [2-7](#), [2-11](#)

PPI clock select switch (SW5), [1-12](#), [2-13](#)

PPIxCLK signals, [2-13](#)

programmable flags (PFs)

- connections, [2-4](#)

- PF0 (video serial clock), [1-13](#), [2-4](#)

- PF1 (video serial data), [1-13](#), [2-4](#)

- PF2 (DV7183A enable), [1-13](#), [2-4](#), [2-10](#),
[2-11](#)

- PF3 (ADV7183A field pin), [2-4](#), [2-8](#), [2-11](#)

- PF4 (AD1836A SPI select), [1-11](#), [2-3](#), [2-4](#)

- PF13 (ADV7183A reset), [1-12](#), [2-4](#)

- PF14 (ADV7179 reset), [1-12](#), [2-5](#)

- PF15 (AD1836A reset), [1-12](#), [2-5](#)

- PF16-20 (SPORT0), [2-5](#)

- PF21-25 (SPORT1), [2-5](#)

- PF26-27 (UART), [2-5](#)

- PF28-29 (SPORT0 serial clock), [2-5](#)

- PF30-31 (SPORT1 serial clock), [2-5](#)

- PF39-32 (LED13-20), [2-5](#)

- PF47-40 (LED5-12), [1-10](#), [2-5](#)

- PF5-8 (general-purpose IO), [1-10](#), [2-4](#), [2-12](#),
[2-16](#)

pull-down resistors, [1-12](#)

pull-up resistors, [2-11](#)

INDEX

push buttons

See also switches by name (SWx), 1-10

diagram of locations, 2-15

enable switch (SW4), 2-12

R

RCA jacks, x, 2-19

reset

audio codec, 1-12

LED (LED2), 2-17

processor, 1-9

push buttons switch (SW1), 2-16

USB interface, 2-16

video encoder/decoder, 1-12, 2-4

restrictions, of the license, 1-7

RFS0 signal, 1-11, 2-12

RS-232 connector (P2), -xi, 2-8, 2-20

RSCCLK0 signal, 1-11, 2-12

S

schematic, of ADSP-BF561 EZ-KIT Lite, B-1

SDRAM memory

connections, 2-3

control registers, 1-8

core MMRs, 1-8

data bank B SRAM, 1-8

data banks A, B SRAM, 1-8

default settings, 1-9

instruction SRAM, 1-8

instruction SRAM/CACHE, 1-8

optimum settings, 1-9

reserved, 1-8

scratch pad SRAM, 1-8

system MMRs, 1-8

serial

clock pin (SCL), 1-13, 2-4

data pin (SDAT), 1-13

video data, 2-4

serial peripheral interface (SPI), 2-3, 2-4, 2-12, 2-14

setup, of this EZ-KIT Lite, 1-4

~SMS0 memory select pins, 1-8

SPIS1/SPISS signals, 2-14

SPORT

audio interface, 2-3

SPORT0

audio interface, xi, 1-11

connector (P3), 2-20

receive data secondary pin (PF20), 2-5

receive frame sync pin (PF19), 2-5

receive serial clock pin (PF28), 2-5

transmit data primary pin (PF18), 2-5

transmit data secondary pin (PF17), 2-5

transmit frame sync pin (PF16), 2-5

transmit serial clock pin (PF29), 2-5

SPORT1

receive data secondary pin (PF25), 2-5

receive frame sync pin (PF24), 2-5

receive serial clock pin (PF29), 2-5

transmit data primary pin (PF23), 2-5

transmit data secondary pin (PF22), 2-5

transmit frame pin (PF21), 2-5

transmit serial clock pin (PF31), 2-5

SRAM data bank A, 1-8

startup, of this EZ-KIT Lite, 1-5

SW10-11 (test) DIP switches, 2-13

SW12 (audio enable) switch, 2-13

SW13 (SPIS1/SPISS select) switch, 2-14

SW1 (reset) push button, 2-16

SW2 (video config) DIP switch, 1-12, 2-6, 2-7, 2-8, 2-11

SW3 (boot mode) switch, 2-11

SW4 (push button enable) DIP switch, 1-11, 2-12, 2-16

SW5 (PPI clock select) switch, 1-12, 2-6, 2-13

SW6-9 (general input) push buttons, 1-10, 2-4, 2-12, 2-16

synchronous dynamic random access memory,
 See SDRAM
system
 architecture, of EZ-KIT Lite, 2-2
 clock (SCLK), 1-9

T

Target Options dialog box, 1-8
test DIP switches (SW10-11), 2-13
TFS0 signal, 1-11, 2-12
time-division multiplexed (TDM) mode, 1-11
timers11-8, 2-6
timers7-0, 2-4
TSCLK0 signal, 1-11, 2-12

U

UART
 loop jumper (P1), 2-15
 port, xii, 2-8
 transmit/receive pins (PF26-27), 2-5
universal asynchronous receiver/transmitter, *See*
 UART port

USB
 cable, 1-3
 interface, 2-9, 2-16, 2-21
 monitor LED (ZLED3), 2-17
user LEDs (LED5-12, LED13-20), 2-17

V

VDDINT signal, 2-14
video
 channels, 2-7, 2-8
 configuration switch (SW2), 2-10
 connector (J6), 2-19
 control signals, 2-7, 2-9
 decoders, *See* ADV7183A
 encoders, *See* ADV7179
 input (PPI0), 2-8
 interface, 1-12
 output (PPI1), 2-7
VisualDSP++
 environment, 1-5
 online Help, xix
VROUT pins, 2-14
VSYNC signals, 2-7

