



## 16-bit Embedded Control Solutions

- dsPIC® Digital Signal Controllers
- PIC® Microcontrollers



# 16-bit Embedded Control Solutions

*Do you need to add more performance or additional features to your products? Do you need more on-chip memory? Are you concerned with tight schedules and cost goals? How do you decide which embedded control solution will bring the most value to your overall embedded design?*

Microchip's 16-bit solutions are designed to be a broad platform which will serve your needs for many years. If you have designed using our 8-bit PIC® microcontrollers (MCUs) you will be pleased to see that the same MPLAB® Integrated Development Environment used on our smallest 6-pin MCU also supports our most powerful 16-bit controllers. Plus our commitment for peripheral and pinout compatibility has been carried forward to our 16-bit product families. If you are new to Microchip's control solutions, you will see powerful, low cost development tools, a compatible lineup of products that range from low cost to high performance, and a Company dedicated to serving your needs.


Since 2002, Microchip has been #1 in worldwide 8-bit microcontroller shipments\* with a product portfolio that continues to expand to meet the demands of our customers while solving many of their key business issues. With more than 70 16-bit products in our portfolio today and many more on the way, we are committed to offer similar value in the 16-bit realm.

\*Gartner Dataquest, Top Companies Revenue from Shipments of 8-bit MCU - All Applications\* April 2005.

## One Architecture, Four Families

Microchip offers two 16-bit Microcontroller (MCU) families plus two 16-bit Digital Signal Controller (DSC) families that give you compatible options across a wide spectrum of price, performance and feature sets. Common attributes among all 16-bit MCU and DSC families are:


- Pinout compatibility
- Software compatibility
- Peripheral compatibility
- Common development tools

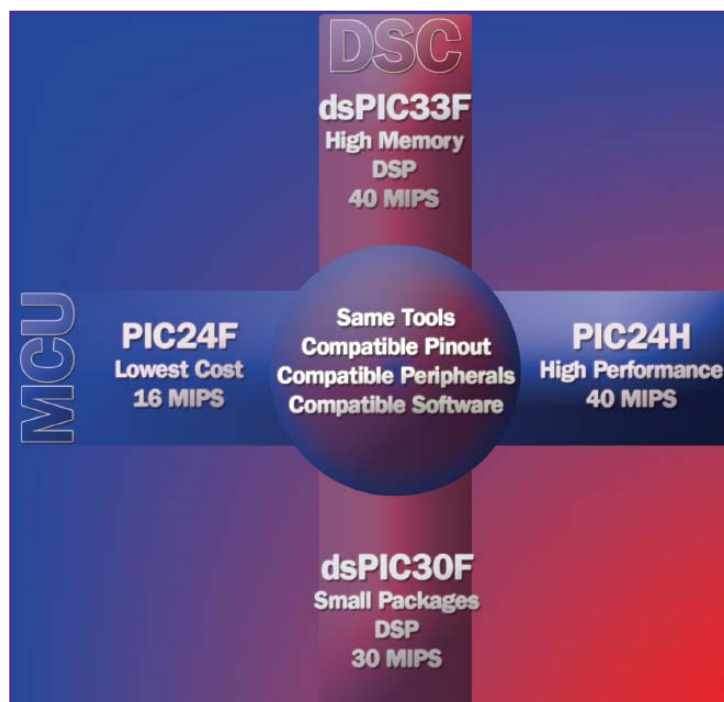

Whether your design requires the lowest-priced 16-bit solution, the most powerful 16-bit MCU in the industry, or DSP capability, Microchip offers a broad range of products while preserving the compatibility that help save you time and money on subsequent designs.

## Table of Contents

16-bit Embedded Control Solutions Introduction	2	Hardware Development Tools	12
The Capability You Need	3	Hardware Development Boards	13
One Architecture: Four Compatible Families	4	Advanced Development Boards	14
16-bit Packages	5	DSP Algorithm Development	15
Specifications for PIC24F Family	6	Operating Systems and Communication Drivers	15
Specifications for PIC24H Family	6	Libraries for Speech Applications	16
Specifications for dsPIC30F Families	7	Connectivity Libraries	17
Specifications for dsPIC33F Families	8	More Application Libraries	18
Designed for Real-time Control	9	Motor Control Application Software	18
Powerful Tools and Libraries	10	Resourced for Self-paced Learning	19
MPLAB® IDE	10	Getting Started	19
Software Development Tools	11	Ordering Guide	20
Building Block Libraries	11		



Microchip has begun converting from tin-lead (SnPb)-plated product packaging to lead (Pb)-free product packaging across the entire portfolio of PIC® microcontrollers, dsPIC® digital signal controllers, serial EEPROMs, stand-alone analog and other devices. This enables our customers to achieve early compliance with new regulations around the world such as the European Union Restrictions on Hazardous Substances in Electrical and Electronic Equipment (RoHS) directive.

## 16-bit Microcontroller (MCU) Portfolio

Are cost or performance important considerations for your next design? PIC24 MCUs offer the variety of peripherals, memory sizes and packaging choices you have come to expect from our 8-bit products. Microchip offers two compatible Flash-based 16-bit PIC24 MCU families. The 16 MIPS PIC24F family is designed for cost-sensitive applications. The 40 MIPS PIC24H family is designed for high performance applications. Both families have the same instruction set, share basic peripherals, have common pinouts and use the same tools for development. Despite the similarities, the PIC24F and PIC24H were designed by independent teams, one targeting lowest cost and the other creating the highest performance 16-bit MCU in the industry. The PIC24 families are highly compatible with dsPIC DSCs for easy migration when additional performance or DSP capability is required.

## 16-bit Digital Signal Controller (DSC) Portfolio

Are you looking to add DSP capability to your application? DSCs blend the features of both MCUs and DSPs into a single chip solution enabling you to add DSP features to your embedded application. Microchip offers two compatible Flash-based 16-bit DSC families. The 30 MIPS dsPIC30F family is designed for applications where 5V operation is important, and the 40 MIPS dsPIC33F family is suited for applications preferring 3.3V or need more on-chip memory. Both DSC families and the PIC24 families have the same base instruction set (DSCs add DSP instructions), share basic peripherals, have common pinouts and use the same tools for development.

## The Capability You Need

### Optimized C Compiler:


Supporting the PIC24 MCU and dsPIC DSC families, Microchip's 16-bit architecture was designed to optimize C language code size. The architecture was co-developed by compiler writers who emphasized the need for an orthogonal instruction set, many general-purpose registers, powerful indirect with off-set addressing and a software stack. Now you can achieve leadership code size in applications, helping your project team to hit schedule and code size targets. Reduced code size provides the opportunity to use a smaller memory device at a lower price, reduce time spent optimizing and fine-tuning code size to fit the memory space, and also responding to those marketing requests for "just one more feature."

### Powerful 16-bit CPU:

The PIC24 MCU and the dsPIC DSC families execute most instructions in one cycle. Interrupts are serviced quickly and are deterministic. Bit manipulation is native. Add latest generation features, such as zero overhead looping, single-cycle multiply and a barrel shifter, and you have the most powerful 16-bit MCU for your embedded control designs. If your current need is lowest cost rather than performance, the PIC24F family reduces the available MIPS while offering a very cost-effective solution with these many attributes.

### Looking to Add DSP?

If you are one of the many MCU users looking to add DSP features to your embedded design, the dsPIC DSCs make the process easy and straightforward. The dsPIC DSC retains a MCU look and feel from the architecture to the tools you use for development.

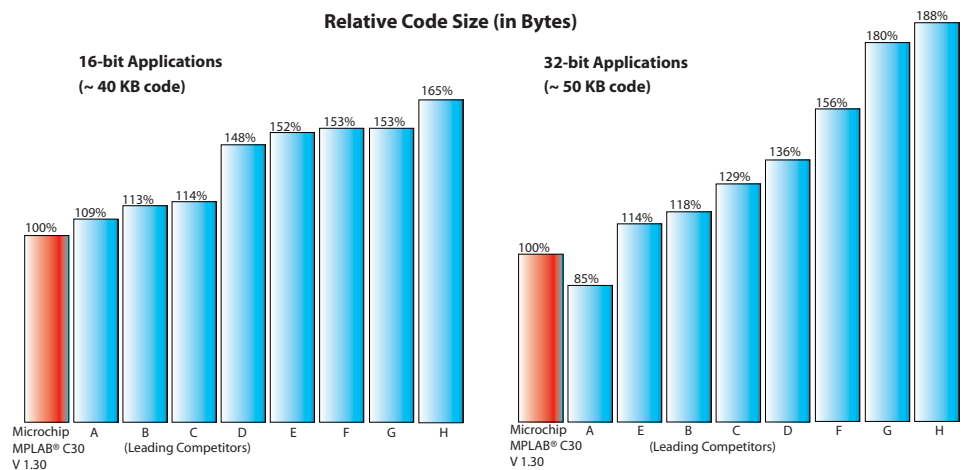

If you don't have the time to become immersed in DSP technology, you can use one of the many libraries developed by DSP experts. Or you can use the available graphical tools to develop digital filters. For DSP experts, Microchip includes many attributes that are typical of true DSPs in this class: dual 40-bit accumulators, single cycle 16x16 MAC, dual operand fetches, saturation and rounding modes, and zero overhead looping. This is not simply a MCU with a MAC attached as an after thought.

### Flexible Flash:

All of Microchip's 16-bit products employ flexible and secure Flash memory. You can use the Flash memory to store programs or data tables. Additionally, all devices can self-program their own Flash memory in a finished product. The PIC24H and dsPIC DSC families offer advanced security features that enable you to secure your base code and allow OEMs to "customize" the application or alternatively work with encrypted data.

### Migration Options:

Once you have designed our 16-bit products into your application, future designs are simplified. You can select from a broad range of memory, pin count, peripheral, performance and price options without changing architecture or development tools. The pinout, software and tool compatibility helps make stepping to different performance or memory points very straightforward. This is also beneficial if you design in an environment of rapidly evolving requirements.

### Considering a 32-bit MCU?

Has your current MCU run out of steam? Microchip's performance-oriented 16-bit solutions can significantly outperform low cost 32-bit controllers for many MCU applications. Why abandon 16-bit deterministic performance, native bit manipulation, fast fixed-latency interrupts and low cost tools to gain inferior 32-bit performance? Many 32-bit customers have reverted to Microchip's 16-bit products after discovering performance issues during the course of their design.



# One Architecture: Four Compatible Families

## PIC24F

16 MIPS @ 3.3V  
 2.0 to 3.6V operation  
 -40° to 85° C (-40° to 125° C Planned)  
 Up to 128K Bytes Program Flash  
 Up to 8K Bytes RAM  
 All packages up to 100 pins

## dsPIC30F

30 MIPS @5V  
 2.5 to 5.5V operation  
 -40° to 85°C and -40° to 125°C  
 Up to 144K Bytes Program Flash  
 Integrated Data EEPROM  
 Up to 8K Bytes RAM  
 All packages up to 80 pins

## dsPIC33F

40 MIPS @3.3V  
 3.0 to 3.6V operation  
 -40° to 85°C (extended temp. planned)  
 Up to 256K Bytes Program Flash  
 Up to 30K Bytes RAM  
 64 to 100 pin packages  
 All packages up to 100 pins

## PIC24H

40 MIPS @ 3.3V  
 3.0 to 3.6V operation  
 -40° to 85°C (-40° to 125°C Planned)  
 Up to 256K Bytes Program Flash  
 Up to 16K Bytes RAM  
 All packages up to 100 pins

### Highly Cost-Effective PIC24F 16-bit MCUs

With 16 MIPS performance and an extensive peripheral set, the PIC24F MCUs are a highly cost-effective solution for all but the most demanding 16-bit applications. The PIC24F also offers a new migration option for design engineers whose applications may be outgrowing the performance offered by 8-bit MCUs and need to stay cost competitive.

### Highest Performance PIC24H 16-bit MCUs

For more demanding applications, the PIC24H offers 40 MIPS performance, more memory and additional peripherals. The PIC24H family adds up to 2 CAN communication modules, user selectable 10/12-bit Analog-to-Digital (A/D) converter and enhanced timer functions. Integrated Direct Memory Access (DMA) between peripherals and dual-port RAM provides zero overhead data transfers, optimizing CPU throughput.

### Versatile 5 Volt dsPIC30F DSCs

The 30 MIPS dsPIC30F family is developed for applications that benefit from a wide operating voltage (2.5 to 5.5 volts), extremely low standby current, integrated EEPROM, above-average Flash endurance for those that prefer 5V operation for system considerations. The dsPIC30F family includes robust peripheral options including up to 2 CAN modules, motor control peripherals and a Codec Interface which supports I<sup>2</sup>S and AC97 protocols.

### High Performance, Cost Effective 3.3 Volt dsPIC33F DSCs

The 40 MIPS dsPIC33F family is developed for high performance embedded control applications. Compared to the dsPIC30F family, the dsPIC33F family offers larger RAM and Flash memory options, adds DMA and will be more cost effective in larger memory configurations.

16-BIT COMPARISON

	PIC24F	PIC24H	dsPIC30F	dsPIC33F
Best in Class C Compiler Efficiency	✓	✓	✓	✓
Same Instruction Set	✓	✓	Adds DSP	Adds DSP
Same Base Peripherals	✓	✓	✓	✓
Same Pinout	✓	✓	✓	✓
Same Development Tools	✓	✓	✓	✓
Fixed Fast Interrupt Latency	✓	✓	✓	✓
Universal Bit Manipulation	✓	✓	✓	✓
Full Speed from Flash	✓	✓	✓	✓
Single-Cycle Multiply	✓	✓	✓	✓
32/16 & 16/16 Divide	✓	✓	✓	✓
Deterministic Instruction Execution	✓	✓	✓	✓

# 16-bit Product Features Overview

## Operating Range PIC24F

DC to 16 MIPS
V <sub>DD</sub> range: 2.0 to 3.6V
Ind.(-40° to 85° C) Extended temp. planned

## Operating Range PIC24H & dsPIC33F

DC to 40 MIPS
V <sub>DD</sub> range: 3.0 to 3.6V
Ind.(-40° to 85° C) Extended temp. planned

## Operating Range dsPIC30F

DC to 30 MIPS*
V <sub>DD</sub> range: 2.5 to 5.5V
Ind. (-40° to 85° C) and ext. (-40° to 125°C)
*30 MIPS @ 4.5 to 5.5V, -40° to 85° C

## High Performance CPU

Single cycle execution (most instructions)
C compiler optimized instruction set
16-bit wide data path
76 base instructions: mostly 1 word/1 cycle
16 16-bit general purpose registers
Software stack
16 x 16 fractional/integer multiplier
32/16 and 16/16 divide
40-stage barrel shifter
DSC additions (dsPIC30F & dsPIC33F):
• Adds 8 base DSP instructions
• 2 40-bit accumulators with rounding and saturation options
• Single core combines MCU & DSP features
• Adds Modulo and Bit-reverse address modes

## Hardware DMA PIC24H & dsPIC33F

8 channel DMA
2 KB dual port RAM

## Power Management

Switch between clock sources in real-time
Programmable power-on reset start up
Programmable low-voltage detect (dsPIC30F)
Programmable brown-out reset
Idle and Sleep modes with fast wake up

## System Management

Flexible clock options:
• Primary external clock, crystal, resonator
• Secondary lower power 32 kHz oscillator
• Internal RC: fast or low power
• Integrated low jitter PLL
– PLL sourced by ext. & int. clock sources
Programmable power-up timer
Oscillator start-up timer/stabilizer
Watchdog Timer with its own RC oscillator
Clock switching/fail-safe clock monitor

## Interrupt Controller

5 cycle fixed latency
Up to 118 interrupt sources, up to 5 external
7 programmable priority levels
4 processor exceptions and software traps

## Digital I/O

Up to 85 programmable digital I/O pins
Wake-up/Interrupt-on-change on up to 24 pins
High current sink/source (PIC24F & dsPIC30F)

## On-chip Flash, Data EE and RAM

Flash program memory: up to 256 KB
dsPIC30F Data EEPROM: up to 4 KB
• 1 million erase/write cycles typical
Data RAM: up to 30 KB

## Timers/Capture/Compare/PWM

Timer/counters: up to nine 16-bit timers
• Can pair up to make 32-bit timers
• 1 timer can run as real-time clock
Input capture: up to 8 channels
• Capture on rising, falling or both edges
• 4-deep FIFO on each capture
Output compare: up to 8 channels
• Single or dual 16-bit compare mode
• 16-bit glitchless PWM mode

## Communication Modules

3-wire SPI: up to 2 modules
• Framing supports I/O interface to simple codecs
I <sup>2</sup> C™: up to 2 modules
• Full Multi-master and Slave mode support
• 7-bit and 10-bit addressing
UART: up to 2 modules
• Interrupt-on-address bit detect
• Wake-up on Start bit from Sleep mode
• 4-character TX and RX FIFO buffers
Codec interface module
• Supports I <sup>2</sup> S and AC97 protocols
CAN/ECAN 2.0B active: up to 2 modules
• 3 transmit, 2 receive buffers (dsPIC30F)
• 8 transmit, 32 receive buffers (PIC24H & dsPIC33F)
• Wake-up on CAN message


## Motor Control Peripherals

Motor Control PWM: up to 8 outputs
• 4 duty cycle generators
• Independent or complementary mode
• Programmable dead time settings
• Edge or center-aligned
• Manual output override control
• Up to 2 fault inputs
• A/D samples triggered by PWM module
Quadrature encoder interface module
• Phase A, Phase B and index pulse input

## Analog-to-Digital Converters

10-bit A/D converter:
• dsPIC24F: 500 Ksps, 1 module
• PIC24H: 1.1 Msps, 1 or 2 modules
• dsPIC30F: 1 Msps, 1 module
• dsPIC33F: 1.1 Msps, 1 or 2 modules
12-bit A/D converter:
• PIC24H: 1.1 Msps 1 or 2 modules
• dsPIC30F: 200 ksps, 1 module
• dsPIC33F: 500 ksps, 1 or 2 modules
Common features:
Users can select 10- or 12-bit A/D (PIC24H & dsPIC33F)
Buffered output or DMA
16-deep result buffer
• dsPIC30F & PIC24F: up to 16 channels auto scanning
• PIC24H & dsPIC33F: up to 32 channels auto scanning

# 16-bit Packages

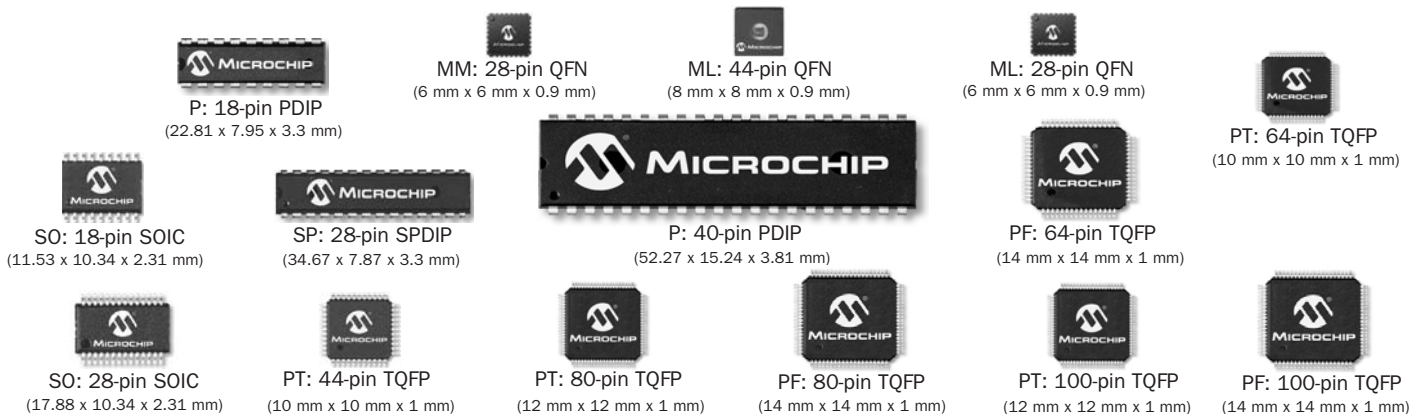

# PIC24F Family

## 16 MIPS, lowest cost

The PIC24F family is ideal for cost sensitive applications or applications migrating from 8-bit designs for a boost in performance or memory.

Product	Pins	Flash Kbytes	SRAM Kbytes	Timer	Capture	Output Comp. PWM	Real Time Clock Calendar	A/D 10-bit 500 ksps	Comparators	UART	SPI	I <sup>2</sup> C™	JTAG	Package Code
PIC24FJ64GA006	64	64	8	5	5	5	Y	16	2	2	2	2	Y	PT
PIC24FJ64GA008	80	64	8	5	5	5	Y	16	2	2	2	2	Y	PT
PIC24FJ64GA010	100	64	8	5	5	5	Y	16	2	2	2	2	Y	PT, PF
PIC24FJ96GA006	64	96	8	5	5	5	Y	16	2	2	2	2	Y	PT
PIC24FJ96GA008	80	96	8	5	5	5	Y	16	2	2	2	2	Y	PT
PIC24FJ96GA010	100	96	8	5	5	5	Y	16	2	2	2	2	Y	PT, PF
PIC24FJ128GA006	64	128	8	5	5	5	Y	16	2	2	2	2	Y	PT
PIC24FJ128GA008	80	128	8	5	5	5	Y	16	2	2	2	2	Y	PT
PIC24FJ128GA010	100	128	8	5	5	5	Y	16	2	2	2	2	Y	PT, PF

# PIC24H Family

## 40 MIPS, highest performance

The PIC24H family is ideal for applications with greater performance or memory requirements or require extensive data movement.

Product	Pins	Flash Kbytes	SRAM Kbytes	Timer	Capture	Output Comp. PWM	Comparators	A/D 10-/12-bit* 1.1 Msps/ 500 ksps	UART	SPI	I <sup>2</sup> C™	CAN	JTAG	Package Code
PIC24HJ64GP206	64	64	8	9	8	8	2	18	2	2	1	—	Y	PT
PIC24HJ64GP210	100	64	8	9	8	8	2	32	2	2	2	—	Y	PT, PF
PIC24HJ64GP506	64	64	8	9	8	8	2	18	2	2	2	1	Y	PT
PIC24HJ64GP510	100	64	8	9	8	8	2	32	2	2	2	1	Y	PT, PF
PIC24HJ128GP206	64	128	8	9	8	8	2	18	2	2	2	—	Y	PT
PIC24HJ128GP210	100	128	8	9	8	8	2	32	2	2	2	—	Y	PT, PF
PIC24HJ128GP306	64	128	16	9	8	8	2	18	2	2	2	—	Y	PT
PIC24HJ128GP310	100	128	16	9	8	8	2	32	2	2	2	—	Y	PT, PF
PIC24HJ128GP506	64	128	8	9	8	8	2	18	2	2	2	1	Y	PT
PIC24HJ128GP510	100	128	8	9	8	8	2	32	2	2	2	1	Y	PT, PF
PIC24HJ256GP206	64	256	16	9	8	8	2	18	2	2	2	—	Y	PT
PIC24HJ256GP210	100	256	16	9	8	8	2	32	2	2	2	—	Y	PT, PF
PIC24HJ256GP610	100	256	16	9	8	8	2	2 x 32	2	2	2	2	Y	PT, PF

\* PIC24H features a user-selectable 500 mbps 12-bit A/D or 1.1 Msps 10-bit A/D

# dsPIC30F Product Families

## General Purpose Family

The dsPIC30F General Purpose Family is ideal for a wide variety of 16-bit embedded control applications. In addition, the variants with codec interfaces are well suited for speech and audio applications.

Product	Pins	Flash-Memory Kbytes	RAM Bytes	EEPROM Bytes	Timer 16-bit	Input Capture	Output Compare/Standard PWM	Codec Interface	A/D 12-bit 200 ksp/s	UART	SPI	f <sup>CM</sup>	CAN	I/O Pins (Max.)†	Package Code
dsPIC30F3014	40/44	24	2048	1024	3	2	2	—	13 ch, 1 S/H	2	1	1	—	30	P, PT, ML
dsPIC30F4013	40/44	48	2048	1024	5	4	4	AC97, I <sup>2</sup> S	13 ch, 1 S/H	2	1	1	1	30	P, PT, ML
dsPIC30F5011	64	66	4096	1024	5	8	8	AC97, I <sup>2</sup> S	16 ch, 1 S/H	2	2	1	2	52	PT
dsPIC30F6011 <sup>1</sup>	64	132	6144	2048	5	8	8	—	16 ch, 1 S/H	2	2	1	2	52	PF
dsPIC30F6011															PT
dsPIC30F6012 <sup>1</sup>	64	144	8192	4096	5	8	8	AC97, I <sup>2</sup> S	16 ch, 1 S/H	2	2	1	2	52	PF
dsPIC30F6012A															PT
dsPIC30F5013	80	66	4096	1024	5	8	8	AC97, I <sup>2</sup> S	16 ch, 1 S/H	2	2	1	2	68	PT
dsPIC30F6013 <sup>1</sup>	80	132	6144	2048	5	8	8	—	16 ch, 1 S/H	2	2	1	2	68	PF
dsPIC30F6013A															PT
dsPIC30F6014 <sup>1</sup>	80	144	8192	4096	5	8	8	AC97, I <sup>2</sup> S	16 ch, 1 S/H	2	2	1	2	68	PF
dsPIC30F6014A															PT

## Motor Control and Power Conversion Family

This dsPIC30F family supports motor control applications, such as brushless DC motors, single- and 3-phase induction and switched reluctance motors. These are also ideal for UPS, inverters, switched mode power supplies and power factor correction.

Product	Pins	Flash-Memory Kbytes	RAM Bytes	EEPROM Bytes	Timer 16-bit	Input Capture	Output Compare/Standard PWM	Motor Control PWM	Quadrature Encoder	A/D 10-bit 1 Msp/s	UART	SPI	f <sup>CM</sup>	CAN	I/O Pins (Max.)†	Package Code
dsPIC30F2010	28	12	512	1024	3	4	2	6 ch	Yes	6 ch, 4 S/H	1	1	1	—	20	SP, SO, MM
dsPIC30F3010	28/44	24	1024	1024	5	4	2	6 ch	Yes	6 ch, 4 S/H	1	1	1	—	20	SP, SO, 44-pin ML
dsPIC30F4012	28/44	48	2048	1024	5	4	2	6 ch	Yes	6 ch, 4 S/H	1	1	1	1	20	SP, SO, 44-pin ML
dsPIC30F3011	40/44	24	1024	1024	5	4	4	6 ch	Yes	9 ch, 4 S/H	2	1	1	—	30	P, PT, ML
dsPIC30F4011	40/44	48	2048	1024	5	4	4	6 ch	Yes	9 ch, 4 S/H	2	1	1	1	30	P, PT, ML
dsPIC30F5015	64	66	2048	1024	5	4	4	8 ch	Yes	16 ch, 4 S/H	1	2	1	1	52	PT
dsPIC30F6015	64	144	8192	4096	5	8	8	8 ch	Yes	16 ch, 4 S/H	2	2	1	2	52	PF
dsPIC30F5016	80	66	2048	1024	5	4	4	8 ch	Yes	16 ch, 4 S/H	1	2	1	1	68	PT
dsPIC30F6010	80	144	8192	4096	5	8	8	8 ch	Yes	16 ch, 4 S/H	2	2	1	2	68	PF
dsPIC30F6010A																PT

## Sensor Family

The dsPIC30F Sensor Family products have features designed to support high-performance, cost sensitive and space constrained applications. Offered as small as 6x6 mm and with pin counts as low as 18 pins, this family provides industry leading performance in a small form factor.

Product	Pins	Flash-Memory Kbytes	RAM Bytes	EEPROM Bytes	Timer 16-bit	Input Capture	Output Compare/Standard PWM	A/D 12-bit 200 ksp/s	UART	SPI	f <sup>CM</sup>	I/O Pins (Max.)†	Package Code
dsPIC30F2011	18	12	1024	—	3	2	2	8 ch, 1 S/H	1	1	1	12	P, SO, 28-pin ML
dsPIC30F3012	18/44	24	2048	1024	3	2	2	8 ch, 1 S/H	1	1	1	12	P, SO, 44-pin ML
dsPIC30F2012	28	12	1024	—	3	2	2	10 ch, 1 S/H	1	1	1	20	SP, SO, 28-pin ML
dsPIC30F3013	28/44	24	2048	1024	3	2	2	10 ch, 1 S/H	2	1	1	20	SP, SO, 44-pin ML

† I/O pin count includes pins shared by the peripheral functions  
 1 Suggest "A" version for new designs

# dsPIC33F Product Families

## General Purpose Family

The dsPIC33F General Purpose Family is ideal for a wide variety of 16-bit embedded control applications. In addition, the variants with codec interfaces are well suited for speech and audio applications.

Product	Pins	Flash Memory Kbytes	RAM Kbytes	DMA # Ch	Timer 16-bit	Input Capture	Output Compare/Standard PWM	Codec Interface	A/D* 12-bit 500 ksp/s	UART	SPI	PC™	CAN	I/O Pins (max)†	Package Code
dsPIC33FJ64GP206	64	64	8	8	9	8	8	1	1 ADC, 18 Ch, 1 S/H	2	2	1	—	53	PT
dsPIC33FJ64GP306	64	64	16	8	9	8	8	1	1 ADC, 18 Ch, 1 S/H	2	2	2	—	53	PT
dsPIC33FJ64GP706	64	64	16	8	9	8	8	1	2 ADC, 18 ch, 2 S/H	2	2	2	2	53	PT
dsPIC33FJ128GP206	64	128	8	8	9	8	8	1	1 ADC, 18 Ch, 1 S/H	2	2	1	—	53	PT
dsPIC33FJ128GP306	64	128	16	8	9	8	8	1	1 ADC, 18 Ch, 1 S/H	2	2	2	—	53	PT
dsPIC33FJ128GP706	64	128	16	8	9	8	8	1	2 ADC, 18 ch, 2 S/H	2	2	2	2	53	PT
dsPIC33FJ256GP506	64	256	16	8	9	8	8	1	1 ADC, 18 ch, 1 S/H	2	2	2	1	53	PT
dsPIC33FJ64GP708	80	64	16	8	9	8	8	1	2 ADC, 24 ch, 2 S/H	2	2	2	2	69	PT
dsPIC33FJ128GP708	80	128	16	8	9	8	8	1	2 ADC, 24 ch, 2 S/H	2	2	2	2	69	PT
dsPIC33FJ64GP310	100	64	16	8	9	8	8	1	1 ADC, 32 Ch, 1 S/H	2	2	2	—	85	PT, PF
dsPIC33FJ64GP710	100	64	16	8	9	8	8	1	2 ADC, 32 ch, 2 S/H	2	2	2	2	85	PT, PF
dsPIC33FJ128GP310	100	128	16	8	9	8	8	1	1 ADC, 32 Ch, 1 S/H	2	2	2	—	85	PT, PF
dsPIC33FJ128GP710	100	128	16	8	9	8	8	1	2 ADC, 32 ch, 2 S/H	2	2	2	2	85	PT, PF
dsPIC33FJ256GP510	100	256	16	8	9	8	8	1	1 ADC, 32 ch, 1 S/H	2	2	2	1	85	PT, PF
dsPIC33FJ256GP710	100	256	30	8	9	8	8	1	2 ADC, 32 ch, 2 S/H	2	2	2	2	85	PT, PF

## Motor Control and Power Conversion Family

This dsPIC33F family supports motor control applications, such as brushless DC motors, single- and 3-phase induction and switched reluctance motors. These are also ideal for UPS, inverters, switched mode power supplies and power factor correction.

Product	Pins	Flash Memory Kbytes	RAM Kbytes	DMA # Ch	Timer 16-bit	Input Capture	Output Compare/Standard PWM	Motor Control PWM	Quadrature Encoder Interface	A/D* 10-bit 1.1 Msps	UART	SPI	PC™	CAN	I/O Pins (max)†	Package Code
dsPIC33FJ64MC506	64	64	8	8	9	8	8	8 ch	Yes	1 A/D, 16 Ch, 4 S/H	2	2	2	1	53	PT
dsPIC33FJ64MC706	64	64	16	8	9	8	8	8 ch	Yes	2 A/D, 16 ch, 8 S/H	2	2	2	1	53	PT
dsPIC33FJ128MC506	64	128	8	8	9	8	8	8 ch	Yes	1 A/D, 16 Ch, 4 S/H	2	2	2	1	53	PT
dsPIC33FJ128MC706	64	128	16	8	9	8	8	8 ch	Yes	2 A/D, 16 ch, 8 S/H	2	2	2	1	53	PT
dsPIC33FJ64MC508	80	64	8	8	9	8	8	8 ch	Yes	1 A/D, 18 Ch, 4 S/H	2	2	2	1	69	PT
dsPIC33FJ128MC708	80	128	16	8	9	8	8	8 ch	Yes	2 A/D, 18 ch, 8 S/H	2	2	2	1	69	PT
dsPIC33FJ64MC510	100	64	8	8	9	8	8	8 ch	Yes	1 A/D, 24 Ch, 4 S/H	2	2	2	1	85	PT, PF
dsPIC33FJ64MC710	100	64	16	8	9	8	8	8 ch	Yes	2 A/D, 24 ch, 8 S/H	2	2	2	2	85	PT, PF
dsPIC33FJ128MC510	100	128	8	8	9	8	8	8 ch	Yes	1 A/D, 24 Ch, 4 S/H	2	2	2	1	85	PT, PF
dsPIC33FJ128MC710	100	128	16	8	9	8	8	8 ch	Yes	2 A/D, 24 ch, 8 S/H	2	2	2	2	85	PT, PF
dsPIC33FJ256MC510	100	256	16	8	9	8	8	8 ch	Yes	1 A/D, 16 ch, 4 S/H	2	2	2	1	85	PT, PF
dsPIC33FJ256MC710	100	256	30	8	9	8	8	8 ch	Yes	2 A/D, 24 ch, 8 S/H	2	2	2	2	85	PT, PF

† I/O pin count includes pins shared by the peripheral functions  
 \* The A/D is 10 or 12-bit (user configurable)



# Designed for real-time control, Microchip's 16-bit controllers offer outstanding reliability, robustness and reduced system cost

**Microchip's 16-bit product line is designed to meet the rigorous demands of real-time systems. Not only is its real-time performance superior to other 16- and 32-bit controllers, it also offers a number of highly enabling features specifically designed to enhance system reliability and robustness, and reduce system cost by eliminating external components.**

## Reliable watchdog timer

Microchip's watchdog timer runs from its internal oscillator independent of the system clock.

## On-chip oscillator eliminates crystal, reduces cost

Most 16-bit devices permit the on-chip precision oscillator to be the clock source for your designs. The associated low-jitter PLL can boost the clock to full speed and may eliminate the need for an external crystal. Now you can eliminate the external crystal, save board space and reduce system cost.

## Power save modes optimize power consumption

You have many choices to optimize power consumption inspired by our nanoWatt Technology. Switch to a low frequency on-chip oscillator or divide down the system clock during periods of inactivity. Or you can "power down" core and selected peripherals. Or simply operate at slower speed to conserve power.

## On-chip system clock monitor adds safety

The on-chip clock monitor detects a system clock failure and forces a chip-reset. Restarting the system with the on-chip oscillator provides a graceful way to handle such a catastrophic failure.

## Low Jitter PLL for reliable system operation

On-chip PLL with crystal oscillator input offers low jitter,  $< \pm 0.75\%$  over VDD and temperature for reliable operation of CAN, UART or other forms of communication.

## Extended temperature

Currently many dsPIC DSCs offer 125°C options, making Microchip's 16-bit products ideal for industrial applications that run "hot" such as motor control, power conversion, lighting control and "under-the-hood" automotive systems, such as EPS, electronic gearbox, cooling fan control, etc. Most of the 16-bit lineup is expected to offer extended temperature options.

## Small package, big performance

Several dsPIC DSCs come in QFN packages as small as 6x6 mm. PIC24 MCUs are expected to follow shortly. Now you can add 16-bit performance and save board space too.

## High-current I/O drives save cost

The dsPIC30F and PIC24F families have I/O pins that can drive LEDs directly or eliminate pre-drivers for external FET switches to save you space and cost.

## Self-monitoring CPU protects against software glitches

Code execution flow is continually monitored to prevent catastrophic failures due to software malfunction. Accesses to non-existing memory locations are trapped, as are stack overflow, stack underflow and uninitialized pointer accesses. Now your real-time system has an added level of safety.

## Power-on reset and brown-out reset add robustness, save cost

Intelligent on-chip Power-on Reset eliminates external reset circuitry in most systems. Brown-out can reset the chip in the event of a power glitch. All this adds up to a robust system at a reduced cost.


# Powerful Tools and Libraries to Ease Your Development

Microchip's 16-bit controllers come with an extensive array of development tools, application libraries (many of which are free of charge), development boards and reference designs that allow high-performance embedded solutions to be designed effortlessly and rapidly.

## MPLAB® Integrated Development Environment (IDE)

All of Microchip's MCU and DSC tools operate effortlessly under the MPLAB IDE umbrella. The powerful and yet easy-to-use MPLAB IDE has all of the advanced edit/build/debug features you would expect from a 32-bit debug environment. MPLAB IDE integrates not only software, but all of Microchip's hardware tools and many third party tools. Key features of MPLAB IDE:

- Designed for Windows® XP, 2000 and Windows NT®
- Project build and management
- Flexible watch windows
- Mouse over variable inspection
- Full feature code editor with color context
- Source level debug in ASM and C
- Searchable trace buffers
- Version control integration

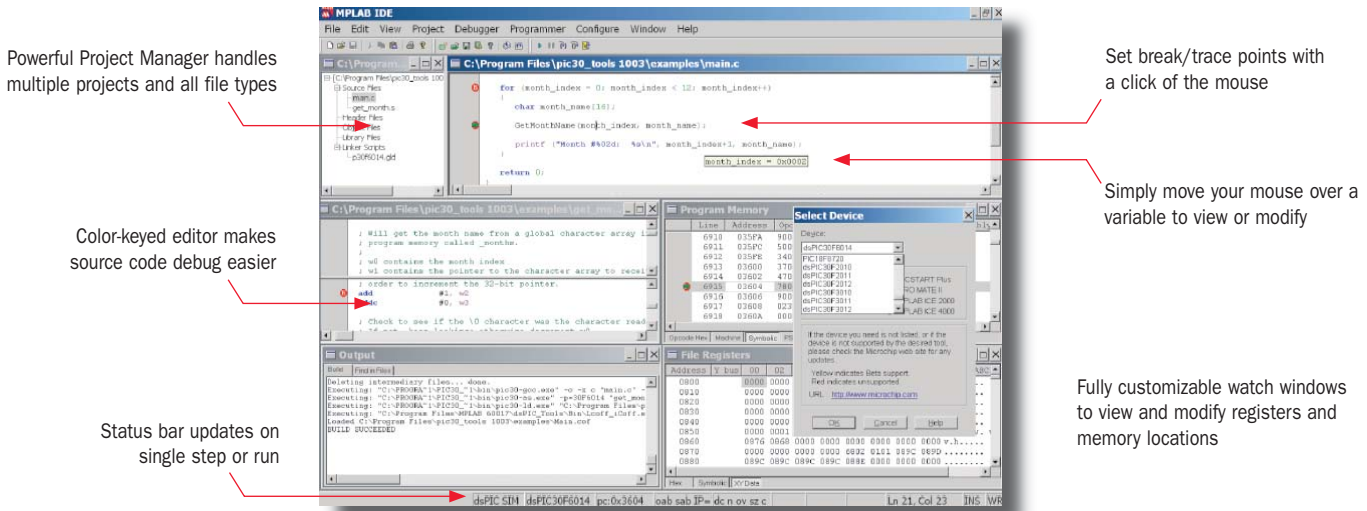

## The Essential Software and Hardware Development Tools

Microchip is committed to making your development as easy and efficient as possible. This commitment is the reason why Microchip develops its own software and hardware tools. You have our full technical support whether the issue is silicon or tools-related.

Our development tools suite provides value with many free and low-cost tools. You can get started with the MPLAB ICD 2 In-Circuit Debugger/Development Programmer and the MPLAB IDE for approximately US \$160.

If you already own a PRO MATE® II Full Featured Device Programmer, the dsPIC30F family is supported on it. If you are considering a new full-featured programmer, the MPLAB PM3 is recommended.

MPLAB® IDE	Integrated Development Environment
MPLAB® ASM30	Assembler*
MPLAB® SIM	Software Simulator*
MPLAB® C30	ANSI C Compiler
MPLAB® ICD 2	In-Circuit Debugger/Development Programmer
MPLAB® ICE 4000	In-Circuit Emulator for dsPIC30F**
MPLAB® PRO MATE® II	Full Featured Device Programmer
MPLAB® PM3	Full Featured Device Programmer
MPLAB® VDI	Visual Device Initializer*

\* Comes with no-cost MPLAB® IDE

\*\* A low cost in-circuit emulator family is planned for the dsPIC33F

# World Class 16-bit Software Development Tools



## Assembler/Linker/Librarian

The MPLAB ASM30 is a full-featured macro assembler. User defined macros, conditional assembly and a variety of assembler directives make the MPLAB ASM30 a powerful code generation tool.

The MPLAB LINK30 and MPLAB LIB30 are Linker and Librarian modules that allow efficient linking, library creation and maintenance.

## Industry Leading C Code Efficiency

The dsPIC DSC was designed with a robust, full-featured instruction set optimized for C compiler efficiency from the start. Coupled with Microchip's highly optimized MPLAB C30 C Compiler, this combination produces results that fit into smaller sized on-chip Flash memory.



## MPLAB SIM Software Simulator

The MPLAB SIM Software Simulator is a full-featured, cycle accurate software simulator. In addition to simulating the CPU and the instruction set, it also supports key peripherals, such as timers, I/O, interrupts, UART and A/D modules. MPLAB SIM has powerful stimulus capabilities and file I/O. It is ideal for algorithm development.

## MPLAB C30 C Compiler

The MPLAB C30 C Compiler is a full-featured, ANSI compliant optimizing compiler. The MPLAB C30 C Compiler includes a complete ANSI C standard library, including string manipulation, dynamic memory allocation, data conversion, timekeeping and math libraries.

The MPLAB C30 C Compiler has a powerful code optimizer; other 16-bit MCUs generate as much as 165 percent larger code for the same application.



## MPLAB VDI (Visual Device Initializer)


Configuring a powerful 16-bit MCU or DSP can be a complex and challenging task, but not for our 16-bit products. Our MPLAB VDI allows you to configure the entire DSC graphically and when complete, a mouse click generates initialization code usable in assembly or C programs.

The MPLAB VDI does extensive error checking on assignments and conflicts on pins, memories and interrupts, as well as a selection of operating conditions. The generated code files are effortlessly integrated with the rest of your application code through the MPLAB project manager.

The detailed reports on resource assignment and configuration simplify project documentation. Key features of the MPLAB VDI:

- Drag-and-drop feature selection
- One click configuration
- Extensive error checking
- Generates initialization code
- Integrates effortlessly in MPLAB Project Manager
- Printed reports ease project documentation requirements

 Download a full-featured, time-restricted demonstration version of the MPLAB C30 C Compiler from the Microchip web site for your evaluation.

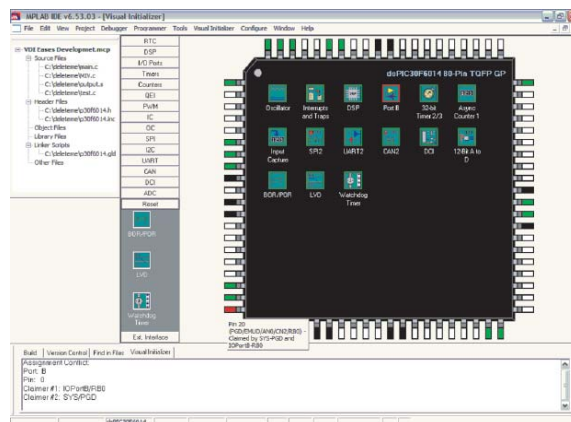

# Jump-start Your Design with Proven and Optimized Building Block Libraries



## Math Library

This IEEE-754 compliant library provides single and double precision floating point ANSI C standard math functions. These routines have been optimized to provide the smallest code size. The library can be used in assembly or C. Key functions in the Math Library:

- sin, cos, tan
- asin, acos, atan
- ln, log10, sqrt, power
- ceil, floor, mod, frexp



## DSP Algorithm Library

This extensive DSP building block library is fully optimized in assembly code for execution speed. The DSP functions can be used in assembly or C. Some key algorithms addressed in the DSP Algorithm Library:

- Cascaded IIR filters
- FIR filters and LMS filters
- Correlation, convolution
- FFT and window functions
- Matrix and vector operations



## Peripheral Driver Library

This library of over 270 C utility functions helps you set up and operate the hardware peripheral modules in various modes. Functions covered in the Peripheral Driver Library:

- 10-bit and 12-bit A/D converters
- UART, SPI, I<sup>2</sup>C™ and codec interface
- Motor Control PWM and QEI
- General purpose timers
- Input capture and output compare



# Hardware Development Tools

## MPLAB ICD 2 In-Circuit Debugger

The MPLAB ICD 2 In-Circuit Debugger is a powerful, low-cost development tool. Running under MPLAB IDE, MPLAB ICD 2 can debug ASM or C source code, watch and modify variables, single step and set breakpoints. Key features of the MPLAB ICD 2:

- Full speed operation
- USB or serial port connection to PC
- Can be used as an inexpensive programmer
- Smart watch variable windows
- Advanced breakpoint features



## MPLAB PM3 Device Programmer

MPLAB PM3 Device Programmer is a full-featured, production quality universal device programmer. Using interchangeable socket modules, the MPLAB PM3 supports virtually all programmable devices from Microchip. MPLAB PM3 has improved programming time for many devices and offers a built-in interface for robust In-Circuit Serial Programming™ (ICSP™).

## MPLAB ICE 4000 In-Circuit Emulator for the dsPIC30F\*

The powerful, full-featured real-time MPLAB ICE 4000 In-Circuit Emulator for the dsPIC30F is capable of debugging the most demanding real-time systems. Key features of the MPLAB ICE 4000 In-Circuit Emulator:

- Full-speed, real-time emulation
- Supports full dsPIC30F supply voltage range
- 64K deep by 216-bit wide trace memory
- Unlimited breakpoints
- Complex break, trace and trigger logic
- Multi-level trigger up to four levels
- 48-bit time stamp
- USB connection to PC
- Stopwatch



\* A low cost in-circuit emulator family is planned for the dsPIC33F

# Hardware Development Boards: Jump-start Your Design

A variety of hardware development boards are available for the dsPIC DSC, enabling you to shorten your design cycle. These boards are designed to allow easy connection to an MPLAB ICD 2, MPLAB ICE 4000 or MPLAB PM3. All development boards include documentation and example source code to accelerate your design.

## Explorer 16 Development Board

The Explorer 16 is a low cost, efficient development board to evaluate the features and performance of Microchip's new PIC24 microcontroller and dsPIC33 digital signal controller families. The board is an ideal prototyping tool to help you quickly develop and validate key design requirements. Key features:

- Supports PIC24F, PIC24H and dsPIC33F general purpose and motor control products
- Modular design for plug-in demonstration boards, expansion header
- Future demonstration boards include Flash cards, Ethernet, IrDA® protocol, wireless communications and voice playback
- Two interchangeable Plug-In Modules (PIMs), one each for the PIC24F and the dsPIC33F




DM240001

## dsPICDEM™ 80-Pin Starter Development Board

This development board offers a very economical way to evaluate the 80-pin dsPIC30F General Purpose and Motor Control Families as well as the dsPIC33F devices. Key features:

- Includes a 80-pin dsPIC30F6014A General Purpose plug-in module (MA300014)
- Accommodates 80-pin dsPIC30F6010 Motor Control plug-in module (MA300013)
- Accommodates the 100- to 80-pin dsPIC33F General Purpose plug-in module (MA330012)
- Power input from 9V supply
- LEDs, switches, potentiometer, UART interface
- A/D input filter circuit for speech-band signal input
- On-board DAC and filter for speech-band signal output
- Circuit prototyping area
- Assembly language demonstration program and tutorial
- Includes a selectable voltage regulator with outputs of 5 to 3.3V

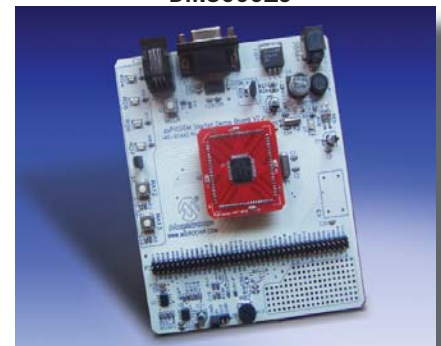

DM300019

## dsPICDEM 1.1 General Purpose Development Board

This board provides development support for speech and audio-related applications. Key features:

- Includes a dsPIC30F6014A plug-in module (MA300014)
- Serial communication channels (two UART, SPI, CAN)
- Si3000 codec with MIC IN/Speaker OUT
- General purpose prototyping area and expansion header
- Digital potentiometer, LEDs, switches, etc.



DM300014

## Motor Control Development System

This system provides quick prototyping and validation of BLDC, ACIM, PMSM, SR and UPS applications. The system consists of the dsPICDEM MC1 Motor Control Development Board and one of two optional power modules. The dsPICDEM MC1H 3-Phase High-Voltage Power Module (DM300021) supports AC line-powered applications, while the dsPICDEM MC1L 3-Phase Low-Voltage Power Module (DM300022) supports DC-powered applications up to 48V. Key features:

- Heat sink for ambient cooling of power sections
- Full automatic protection of power circuits
- Electrical isolation from power circuits
- Many options for motor feedback signals



DM300021/22

Note: Power module shown with dsPICDEM MC1 Development Board DM300020



DM300020

Includes a dsPIC30F6010 plug-in module (MA300013)



# Advanced Development Boards: Complex Designs Made Simple

A variety of hardware development boards are available for the dsPIC DSC, enabling you to shorten your design cycle. These boards are designed to allow easy connection to an MPLAB ICD 2, MPLAB ICE 4000 or MPLAB PM3. All development boards include documentation and example source code to accelerate your design.

## PICDEM™ MC LV Motor Control Development Board

This development board provides a cost-effective method of evaluating and developing sensored or sensorless Brushless DC (BLDC) motor control applications. A 28-pin, dsPIC30F3010 device is used with this board. Key features:

- Over-current protection and temperature sensor with I<sup>2</sup>C™ interface
- 3-phase voltage source inverter bridge
- 9 LEDs, 3 for generic status indication and 6 for PWM indication
- Test points for motor current and back EMF sensing
- Speed control potentiometer
- Supports maximum motor ratings of 48V and 2.2A
- Also supports 28-pin PIC18 MCUs; specifically the PIC18F2431
- Power supply and motor are available (optional) for out-of-the-box experience




DM183021

## dsPICDEM.net™ Connectivity Development Board

This board provides development support for soft modem and connectivity-related applications. Key features:

- dsPICDEM.net 1 (DM300004-1) supports FCC/JATE PSTN countries
- dsPICDEM.net 2 (DM300004-2) supports CTR-21 PSTN countries
- Includes a dsPIC30F6014 plug-in module (MA300011)
- 10-Base T Ethernet MAC and PHY interface
- PSTN interface with DAA/AFE chipset
- Serial communication channels (UART and CAN)
- External EEPROM and RAM memory for storing constants
- General purpose prototyping area and expansion header
- LEDs, switches, potentiometers and LCD display

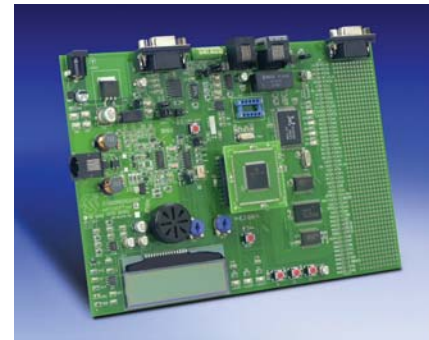

DM300004-1/2

## dsPICDEM 2 Development Board

This development board provides a cost effective way to start designing solutions for all 18-, 28- and 40-pin DIP-packaged dsPIC DSC devices. Key features:

- Development platform for 11 dsPIC DSC devices in 18-, 28- and 40-pin DIP packages including Motor Control, Sensor and General-Purpose family devices
- On-board CAN and UART support
- On-board support for multiple oscillator options
- Example source code and a User Guide is provided to jump-start application development for all 11 devices



DM300018

## dsPICDEM 28-Pin Starter Development Board

This development board provides an economical solution to get started with the 28-pin dsPIC30F devices, including Motor Control, Sensor and Power Conversion families. Key features:

- Includes a 28-pin dsPIC30F2010 device
- Power input from 9V power supply
- UART interface
- Header for access to all device I/O pins
- Circuit prototyping area
- Assembly language demonstration program and tutorial
- Accommodates all dsPIC30F 28-pin DIP or SOIC devices



DM300017


# Develop DSP Algorithms: The Easy Way



## dsPICworks™ Data Analysis and DSP Software

The dsPICworks Data Analysis and DSP Software makes it easy to evaluate and analyze DSP algorithms. You can run a variety of DSP and arithmetic operations and analyze your data in both time and frequency domain. Key features of the dsPICworks Data Analysis and DSP Software:

- Visually analyze time and frequency domain data
- DSP operations: FFT, convolution, correlation, DCT and filtering
- Waveform synthesis
- Tool generates one-, two- and three-dimensional frequency graphs
- Data import/export options to interface with MPLAB IDE and MPLAB ASM30
- Support for fractional, integer and IEEE floating point data in decimal and hexadecimal notation

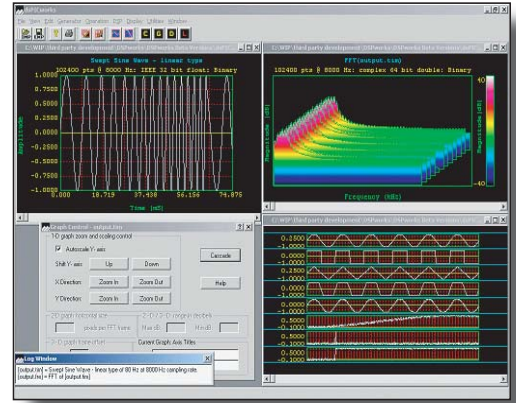


## Digital Filter Design Tool

The Digital Filter Design Tool makes designing and analyzing FIR and IIR filters easy. Enter frequency specifications and filter code and coefficients are generated automatically. Graphical output windows provide the desired filter's characteristics.

### Digital Filter Design Lite Tool

Not ready to purchase the whole Digital Filter package? Why not start Lite? The Digital Filter Design Lite Tool includes most of the features of the full-featured version at a fraction of the cost.

	Filter Design	Filter Design Lite
List Price	\$249	\$29
Low-pass	✓	✓
High-pass	✓	✓
Band-pass	✓	✓
Band-stop	✓	✓
FIR Taps	Up to 513	Up to 64
IIR Taps for LP, HP	Up to 10	Up to 4
IIR Taps for BP, BS	Up to 20	Up to 8
Generate ASM Code	✓	✓
Export to MPLAB® IDE	✓	✓
Export to MPLAB® C30 C Compiler	✓	✓
MATLAB® Support	✓	—

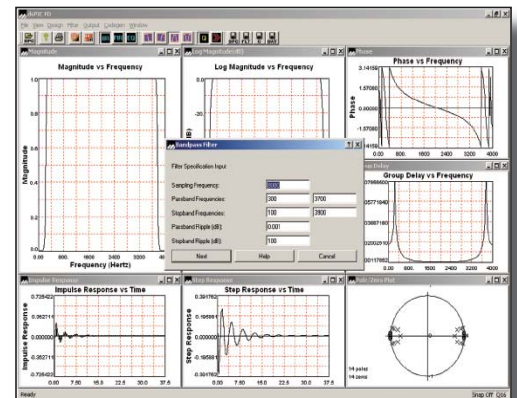

# Operating Systems and Communication Drivers

## RTOS

If you need a Real-Time Operating System (RTOS) to handle multitasking, we have a three-tier solution for you.

- CMX-RTX™: full-featured fully preemptive multi-tasking OS
- CMX-Tiny+™: fully preemptive scaled-down version of the RTX OS
- CMX-Scheduler™: fully preemptive multi-tasking mini OS (FREE)



All three operating systems are fully preemptive and written in assembly language optimized for maximum performance. These RTOS products are developed by CMX and available from Microchip and CMX.

## OSEK and CAN Drivers

Vector Informatik GmbH provides automotive operating systems, sometimes labeled as an OSEK operating system. The Vector Informatik osCAN operating system, which is based on the OSEK/VDX® standard, provides a multitasking operating system with optimal features for use on MCUs. This product represents a small, sturdy operating system kernel.

The companion support for managing the CAN interface drivers on the dsPIC30F family of products is the CANbedded CAN driver suite from Vector Informatik. This product consists of a number of adaptive source code modules that cover the basic communication requirements in automotive applications.

### RTOS features:

- Small program memory footprints
- The fastest context switch times
- The lowest interrupt latency times
- True Preemption

### Some of the CAN functions supported:

- Initialize CAN Module
- Set CAN Operational Mode
- Set CAN Baud Rate
- Set CAN Mask
- Set CAN Filter
- Send CAN Message
- Receive CAN Message
- Abort CAN Sequence
- Random Number Generator

# Libraries for Speech Applications

## Speech Encoding/Decoding Libraries


Three options exist for a variety of speech compression/encoding and decompression/decoding applications:

- G.711 is available for free. The library is an implementation of the ITU-T G.711 standard which uses A-law or u (mu)- law companding to achieve 2: 1 compression.
- G.726A is an implementation of the ITU-T G.726 Annex A standard which uses Adaptive Differential Pulse Code Modulation (ADPCM) encoding algorithm. It can achieve up to an 8:1 compression ratio depending on output bit rate selected.
- SPEEX is a popular standard in the LINUX workstation community which has been adapted for the dsPIC DSC. It uses Code Excited Linear Prediction (CELP) encoding pioneered for cellular applications. It can achieve a 16:1 compression ratio.

Vocoder	Incoming Data Rate (16-bit)	Output Rate	Speech Quality (MOS)	MIPS	Flash (KB)	RAM (KB)	Target
G.711	8 kHz	64 kbps	4.3 -4.5	1	3	3.6	PIC24/dsPIC DSC
G.726A	8 kHz	16 to 40 kbps	4.3 - 4.5	15	6	4	dsPIC DSC
SPEEX	8 kHz	8 kbps	3.7 - 4.2	19	33	5.4	dsPIC DSC


## Noise Suppression Library

This application library suppresses the noise interference in a speech signal, such as ambient noise picked up by a microphone while capturing speech. This algorithm is particularly useful for systems such as hands-free phones, speakerphones, intercoms and headsets where an isolated noise reference is not available. The algorithm handles 0-4 kHz audio bandwidth and provides 10-20 dB of noise reduction. The library also includes some sample rate conversion functions to support input/output sampling rates of 9.6 kHz, 11.025 kHz and 12 kHz.

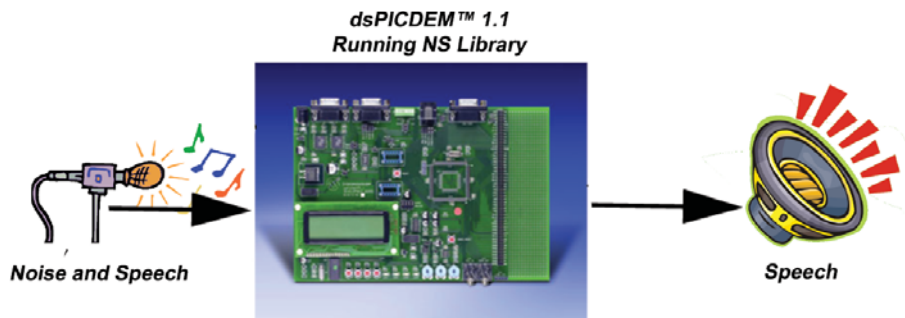

## Acoustic Echo Cancellation Library

This library provides a function to eliminate the echo generated in the acoustic path between a speaker and a microphone, such as in a speakerphone or an intercom system. This library is fully compliant with the G.167 standard and provides 16, 32 or 64 ms echo delays. It handles 0-4 kHz audio bandwidth and provides echo cancellation of 40-50 dB. It also includes some sample rate conversion functions to support input/output sampling rates of 9.6 kHz, 11.025 kHz and 12 kHz.

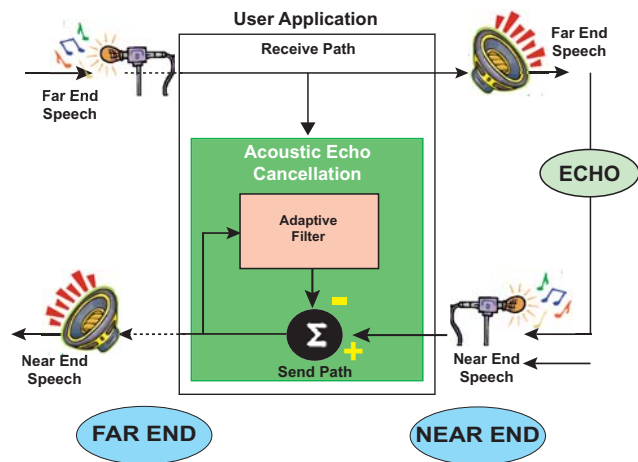

## Line Echo Cancellation Library

This library provides a function to cancel electrical line echoes caused by 2- to 4-wire conversion hybrids in telephone lines. The library can be used in long distance voice communication applications, especially in links involving satellite networks and intercontinental long haul networks, as well as digital networks, such as Voice over IP (VoIP). This library is fully compliant with the ITU-T G.168 recommendation. The library can be used for full-duplex operation. It handles 0-4 kHz audio bandwidth (8 kHz sampling of 16-bit speech data).

### Line Cancellation Library features:

- 8 kHz sampling rate
- Full duplex
- Compliant with ITU-T G.168 recommendations
- Royalty-free, one-time license

## Speech Recognition

Automatic Speech Recognition (ASR) for the dsPIC digital signal controllers supports a variety of voice-activated applications like handset and home appliance control. A Speech Word Library Builder and a Speech Recognition Software Library make up the ASR software suite.

### Speech Recognition Library features:

- Speaker independent recognition
- PC-based word library builder
- Up to 100 word vocabulary (American English)
- Supports multiple noise profiles
- Suitable for many voice control applications



# Plug and Play with Our Connectivity Libraries

## TCP/IP Protocol Stack

### MicroNet™ TCP/IP Stack by CMX

MicroNet TCP/IP Stack by CMX is specifically designed for optimized use of Flash and RAM resources on the dsPIC DSC. The software runs directly on the processor with no gateways or PCs required. The stack can be run in stand alone mode or work in conjunction with an RTOS. Using only industry standard protocols, CMX-MicroNet offers true TCP/IP networking via direct, dial-up or Ethernet connectivity and wireless Ethernet (802.11b) as well. This library can be readily implemented on the dsPICDEM.net™ Connectivity Board. This stack supports Point-to-Point Protocol, E-mail support and modem control, which are not currently supported on the free Microchip stack

#### MicroNet™ TCP/IP Stack by CMX

- RFC compliant protocol stack
- Supports CMX RTOS
- Ethernet NIC driver
- Small Flash/RAM footprint
- Source code provided



### Microchip Free TCP/IP Stack

The Microchip TCP/IP Stack is a free suite of programs that provide services for standard TCP/IP-based applications (HTTP server, FTP server, etc.) or it can be used in a custom TCP/IP-based application. The stack is optimized for size and is designed to run on the dsPIC DSC. While this particular implementation is specifically targeted to run on the dsPICDEM.net Connectivity Development Board, it can be retargeted to any hardware equipped with a dsPIC DSC. HTML web pages generated by the digital signal controller can be viewed with a standard web browser such as Microsoft® Internet Explorer.

#### Microchip Free TCP/IP Stack

- Out-of-box support for MPLAB C30 compilers
- Implements complete TCP state machine
- Modules provided: MAC, SLIP, ARP, IP, ICMP, TCP, SNMP, UDP, DHCP, FTP, IP Gleaning, HTTP, MPFS (Microchip File System)
- RTOS independent

## Soft Modem Libraries

### V.22bis/V.22 Soft Modem Library

This library is available free of charge from the Microchip web site. The V.22bis Soft Modem Library is a collection of algorithms for ITU-T compliant V.21/Bell 103, V.22 and V.22bis modems and V.42 recommendations. The V.22bis library comes with full source code and archives that contain object code modules required for linking with your application. The transmit and receive data pump code modules are coded in assembly language for optimal speed and smallest code size, while the AT, V.42 and Data Pump APIs are coded in C. Hardware component drivers, such as UART and Data Converter Interface (DCI) for Analog Front End (AFE) I/O are provided. This library can be readily implemented on the dsPICDEM.net™ Connectivity Board.



#### V.32bis/V.22bis by Microchip

- Data Pump coded in assembly for optimal size and speed
- V.32bis (4800 thru 14,400 bps)
- V.22bis (1200 thru 2400 bps)
- V.42 (LAPM, error correction procedure)

### V.32bis Soft Modem Library

The V.32bis Soft Modem Library is a collection of algorithms for ITU-T compliant V.21/Bell 103, V.22, V.22bis, V.32 and V.32bis modems and V.42 recommendations. The V.32bis library is provided with archives that contain object code modules required for linking with your application. The transmit and receive data pump code modules are coded in assembly language for optimal speed and smallest code size, while the AT, V.42 and Data Pump APIs are coded in C. Hardware component drivers, such as UART and DCI for AFE I/O are provided. This library can be readily implemented on the dsPICDEM.net Connectivity Development Board.

### V.32/V.22/V.22bis Soft Modem Library by VOCAL Technologies, LTD

The Soft Modem Library is a collection of data modulations and protocols (V.32, V.22, V.22bis, V.23, V.21, Bell 103, Bell 212A and Bell 202). This library is provided with archives that contain object code modules, which link to your application. The data modulation is coded in C with inline assembly language optimization for speed and code size. Hardware component drivers, such as UART and DCI for AFE I/O are provided. This library can be readily implemented on the dsPICDEM.net Connectivity Board.

#### V.32/V.22/V.22bis by VOCAL Technologies, LTD

- VOCAL's proven solution on a dsPIC30F
- V.32 (9600 and 4800 bps, non-trellis encoding)
- V.22/V.22bis (2400, 1200 and 600 bps)
- V.42 (LAPM, error correction procedure)

# More Application Libraries Ready to Use

## Encryption Libraries

Implement reliable secure applications using the Symmetric and Asymmetric Key Embedded Encryption Libraries. Developed for Microchip by NTRU Cryptosystems Inc., these libraries are both proven and optimized. These library functions can be easily called by your C or assembly code.

The algorithms included in these libraries have emerged as de facto standards for many large scale secure applications such as web access (SSL/TLS), E-mail (S-MIME), secure XML transactions and virtual private networks (IPsec). These algorithms are also recommended by Federal Information Processing Standards (FIPS) and the Internet Engineering Task Force (IETF).

### Symmetric Key Embedded Encryption Library features:

- 128-bit AES in ECB, CTR, CBC, CBC-MAC and CCM modes
- Triple DES in ECB, CTR, CBC and CBC-MAC modes
- SHA-1
- MD5
- Random number generator (DRBG X9.82)

### Asymmetric Key Embedded Encryption Library features:

- RSA (1024-bit and 2048-bit modulus) for encryption/decryption and signing/verification
- DSA (1024-bit modulus) for signing/verification
- Diffie-Hellman Key Agreement (1024-bit and 2048-bit modulus)
  - Private/public key generation
  - Shared-key generation
- SHA-1
- MD5
- Random number generator (DRBG X9.82)

## Motor Control Application Software

The Motor Control Family is suited for advanced AC Induction Motor (ACIM), Brushless DC (BLDC) and Switched Reluctance (SR) motor applications. Two advanced applications are available that run on the dsPIC30F Motor Control Development System. Full documentation and source code are available for free on the Microchip web site for all application notes. For more information about Microchip's motor control solutions, please visit the Motor Control Design Center at [www.microchip.com/motor](http://www.microchip.com/motor).

### **FREE** Vector Control of an ACIM

This application note describes a fully-tested vector, or field oriented, control algorithm for a 3-phase ACIM. The motor currents, torque and velocity are regulated in control loops. Full documentation and source code are available for free on the Microchip web site (Application Note: AN908).

### **FREE** Sensorless BLDC Motor Control Using the dsPIC30F6010

This application note describes a fully-tested sensorless control algorithm for a 3-phase BLDC motor. Motor current, motor velocity and bus voltage are regulated in control loops. An LCD menu interface provides adjustment of all sensorless motor control parameters. This application solution utilizes a dsPIC30F6010 device and the dsPICDEM MC1 development system (Application Note: AN901).

### **FREE** Introduction to ACIM Control

This application note is an introductory approach to the methods described in Application Note: AN908. Code is provided in an example that offers basic variable speed control of a single or three-phase ACIM (Application Note: AN984).

### **FREE** Sensorless BLDC Motor Control Using the dsPIC30F2010

This application note describes how to provide sensorless BLDC motor control with the dsPIC30F2010 device. The technique used is based on another Microchip application note: Using the dsPIC30F for Sensorless BLDC Control (AN901). This application solution and AN957 present a low pin count solution with minimal I/O and use the PICDEM MC LV system with a dsPIC30F2010 device (Application Note: AN992).

### **FREE** Sensored BLDC Motor Control

This application note describes a fully-tested 3-phase BLDC motor control algorithm with 3 hall-effect sensors. Code is available with and without a PI speed control loop (Application Note: AN957).

### **FREE** Sinusoidal PMSM Motor Control

This application note provides a fully working and highly flexible solution for using the dsPIC30F2010 to control a permanent magnet synchronous motor using all shunt windings to predict rotor position. The application is fully described in AN1017.

Motor Type	Control strategy	Application Note	Source Code P/N
ACIM	Vector Control	AN908	SWAN0908
ACIM	Introduction	AN984	SWAN0984
BLDC	PI Loop	AN957	SWAN0957
BLDC	Sensorless PI Loop	AN901	SWAN0901
PMSM	Observer	AN992	SWAN0992



## \$5 Evaluation License for Evaluation and Development

A common issue with software libraries is that in order to evaluate the complete library, you must enter into a complex and expensive license arrangement. Any Microchip dsPIC DSC library can be licensed for \$5.00 for evaluation and development purposes. These libraries are complete and unchanged from the production libraries, not reduced function evaluation versions. Evaluation licenses are available from the microchipDIRECT web site (<http://www.microchipDIRECT.com>). Licenses for production are based on a simple low cost one-time license fee. Production licenses are available from Microchip or from our authorized distributors.

## Resources for Self-paced Learning

### Web Seminars

Microchip offers extensive online resources for designers ranging from downloadable documentation to web seminars (webinars) to online discussion groups. All of these helpful resources are accessible on [www.microchip.com/webseminars](http://www.microchip.com/webseminars) and are updated frequently with the most current information on our products and services.

### Workshop in a Box

Periodically Microchip or our sales channel partners offer a fee-based, instructor-led Workshop in a Box, a full day, hands-on training session. The registration fee includes a “box” containing a dsPIC DSC development board and related training material, that is yours to keep to help you further your development skills.

If you have interest in a dsPIC DSC Introductory Workshop in a Box or a dsPIC DSC Motor Control Workshop in a Box, please contact your sales representative. In-house workshops can be arranged to accommodate larger design teams.

Webinar Topic	Duration
Introduction to the dsPIC® Digital Signal Controller	20 min
Introduction to Microchip's Development Tools	25 min
Introduction to dsPIC30F Architecture - Part 1	20 min
Introduction to dsPIC30F Architecture - Part 2	20 min
Introduction to MPLAB® IDE Integrated Development Environment	25 min
Basic dsPIC30F Development Tools	25 min
dsPIC30F Addressing Modes - Part 1	20 min
dsPIC30F Addressing Modes - Part 2	20 min
Introduction to dsPIC30F DSP Engine and ALU	30 min
Introduction to dsPIC30F Interrupts	25 min
dsPIC30F 12-bit ADC Module - Part 1	20 min
dsPIC30F 12-bit ADC Module - Part 2	20 min
dsPIC30F 10-bit ADC Module - Part 1	20 min
dsPIC30F 10-bit ADC Module - Part 2	20 min
Introduction to the MPLAB® VDI Visual Device Initializer	30 min
Serial Communications using the dsPIC30F - Part 1 (UART)	20 min
Serial Communications using the dsPIC30F - Part 2 (SPI)	20 min
Serial Communications using the dsPIC30F - Part 3 (I <sup>2</sup> C™)	30 min
Serial Communications using the dsPIC30F - Part 4 (CAN)	30 min
General Purpose Timers	20 min
dsPIC30F Motor Control Peripherals - Part 1 (MCPWM)	20 min
dsPIC30F Motor Control Peripherals - Part 2 (QEI)	20 min

**For more information about additional self-paced learning resources, please visit [www.microchip.com/training](http://www.microchip.com/training).**

## Getting Started

When time is of the essence, it is helpful to get the hints you need when you need them. Use these “getting started” documents for specific techniques, you can use to jump-start your applications. Getting Started documents are “Application Notes from 40,000 Feet.”

CE001 Using dsPIC30F A/D Converters and the DSP Library for Signal Filtering (DS92001A)	CE006 Address Error Traps for Easy Debugging (DS92006A)	CE011 Dynamic Clock Division for Low-Power Operation (DS92011A)	CE016 Interfacing to 12S Audio Codecs Using dsPIC30F DCI Module (DS92016)
CE 002 Configuring 10-Bit dsPIC DSC A/D Converters for 1 Msps Conversion Rate (DS92002A)	CE007 Stack Error Traps for Easy Debugging (DS92007A)	CE012 Dynamic Clock Switching for Low-Power Operation (DS92012A)	CE017 Reading, Erasing and Writing to dsPIC30F Data EEPROM (DS92017)
CE003 Driving a BLDC with Sinusoidal Voltages Using dsPIC30F (DS92003A)	CE008 Oscillator Failure Traps and Fail-safe Clock Monitoring (DS92008A)	CE013 External Interrupt Pins - Configuration and Use (DS92013A)	CE018 Using the Fast Fourier Transform (FFT) for Frequency Detection
CE004 Timer 1 Used in Real-Time Clock Applications (DS92004A)	CE009 Math Error Traps for Robust Operation (DS92009A)	CE014 Fast Wake-up from Sleep Mode (DS92014A)	CE019 Proportional Integral Derivative (PID) Controllers and Closed-loop Control
CE005 Using FIR Filters from dsPIC DSC Filter Design and DSP Library (DS92005A)	CE010 Performing A/D Conversions in SLEEP (Low-power) Mode (DS92010A)	CE015 Dynamic Tuning of Internal Fast RC Oscillator (DS92015A)	

# Software Development Tools

Development Tool	Product Name	Description	Part#	List Price <b>(1)</b>	Devices Supported			
					PIC24F	PIC24H	dsPIC30F	dsPIC33F
Software	MPLAB® IDE	Integrated Development Environment	SW007002	Free	√	√	√	√
	MPLAB® ASM30	Assembler (included in MPLAB® IDE)	SW007002	Free	√	√	√	√
	MPLAB® SIM	Software Simulator (included in MPLAB® IDE)	SW007002	Free	√	√	√	√
	MPLAB® VDI	Visual Device Initializer (included in MPLAB® IDE)	SW007002	Free	√	√	√	√
C Compilers	MPLAB® C30	ANSI C Compiler, Assembler, Linker and Librarian	SW006012	\$895	√	√	√	√
	Embedded Workbench for dsPIC30F	ISO/ANSI C and Embedded C++ compiler in a professional, extensible IDE, (Windows® NT/2000/Windows XP® ) special DSP support included.	EWdsPIC 1	Contact IIR	—	—	√	—
	dsPICC	ANSI C compiler	dsPICC	Contact HI-TECH	—	—	√	—

# Development Boards and Reference Designs

Development Tool	Description	Part#	List Price <b>(1)</b>	Devices Supported			
				PIC24F	PIC24H	dsPIC30F	dsPIC33F
General Purpose Development Board	dsPICDEM™ 1.1 Development Board for 80L TQFP devices	DM300014	\$299.99	—	—	√	—
Starter Development Boards	dsPICDEM™ 80-pin Starter Development Board	DM300019	\$79.99	—	—	√	—
	dsPICDEM™ 28-pin Starter Development Board	DM300017	\$79.99	—	√	√	√
	dsPICDEM™ 2 Development Board	DM300018	\$99.99	—	—	√	—
	Explorer 16 Development Board	DM240001	\$129.99	√	√	√	√
Motor Control Development Boards	PICDEM™ MC LV Development Board	DM183021	\$129.99	—	—	√	—
	dsPICDEM™ MC1 Motor Control Development Board	DM300020	\$300	—	—	√	—
	dsPICDEM™ MC1H 3-Phase High Voltage Power Module	DM300021	\$800	—	—	√	√
	3-Phase ACIM High Voltage Motor (208/460V)	AC300021	\$120	—	—	√	√
	dsPICDEM™ MC1L 3-Phase Low Voltage Power Module	DM300022	\$700	—	—	√	√
	3-Phase BLDC Low Voltage Motor (24V)	AC300020	\$120	—	—	√	√
Connectivity Development Boards	dsPICDEM.net™ 1 with FCC/JATE-compliant and Ethernet NIC support	DM300004-1	\$389.99	—	—	√	—
	dsPICDEM.net™ 2 with CTR-21-compliant and Ethernet NIC support	DM300004-2	\$389.99	—	—	√	—

# Plug-in Modules for Development Boards

A Plug-in Module (PIM) is a daughter board with a dsPIC DSC soldered on top and header socket strips on the bottom. The PIMs use the device header pins on the dsPIC DSC development boards, which also support the MPLAB ICE 4000 emulator device adapters. This method allows for easy swapping of devices onto the various development boards, without having to unsolder and resolder parts.

Development Tool	Description	Part#	List Price <b>(1)</b>	Devices Supported			
				PIC24F	PIC24H	dsPIC30F	dsPIC33F
Plug-in Modules	PC board with 80-pin dsPIC30F6014 general purpose DSC sample; use with DM300004-1, DM300004-2 Development Boards	MA300011	\$25	—	—	√	—
	PC board with 80-pin dsPIC30F6010 motor control DSC sample; use with DM300019 and DM300020 Development Boards	MA300013	\$25	—	—	√	—
	PC Board with 80-pin dsPIC30F6014A general purpose DSC sample; use with DM300014 and DM300019 Development Boards	MA300014	\$25	—	—	√	—
	PC Board with 80-pin dsPIC30F6010A motor control DSC sample; use with DM300019 and DM300020 Development Boards	MA300015	\$25	—	—	√	—
	PC Board with 100-pin dsPIC33FJ256GP710 DSC sample; use with DM240001 Development Board	MA330011	\$25	—	—	—	√
	PC Board with 100-pin dsPIC33FJ256GP710 DSC sample; use with DM300019 Development Board	MA330012	\$25	—	—	—	√
	PC Board with 100-pin PIC24FJ128GA010 MCU sample; use with DM240001 Development Board	MA240011	\$25	√	—	—	—

**(1)** List price may change without notice.

# Hardware Development Tools

Development Tool	Description	Part#	List Price <b>(1)</b>	Devices Supported			
				PIC24F	PIC24H	dsPIC30F	dsPIC33F
MPLAB® ICD 2	In-Circuit Debugger and Device Programmer	DV164005	\$159.99	√	√	√	√
	In-Circuit Debugger and Device Programmer with dsPICDEM™ 1.1 General Purpose Board	DV164032	\$399.99	—	—	√	—
MPLAB® ICE 4000	In-Circuit Emulator Pod for dsPIC30F	ICE4000	\$2560	—	—	√	—
	Processor Module for dsPIC30F	PMF30XA1	\$595	—	—	√	—
	Device Adapter for 80L/64L TQFP Devices	DAF30-2	\$295	—	—	√	—
	Device Adapter for 44L TQFP Devices	DAF30-3	\$225	—	—	√	—
	Device Adapter for 44L/40L/28L/18L DIP and SOIC Devices (ML and MM)	DAF30-4	\$225	—	—	√	—
	Transition Socket for 18L SOIC	XLT18S0	\$75	—	—	√	—
	Transition Socket for 18L DIP	ACICE0202	\$20	—	—	√	—
	Transition Socket for 28L SOIC	XLT28S0	\$75	—	—	√	—
	Transition Socket for 28L DIP	ACICE0204	\$30	—	—	√	—
	Transition Socket for 28L ML/MM	XLT28QFN3 or XLT28QFN4	\$175	—	—	√	—
	Transition Socket for 40L DIP	ACICE0206	\$40	—	—	√	—
	Transition Socket for 44L ML	XLT44QFN2	\$175	—	—	√	—
	Transition Socket for 44L TQFP	XLT44PT or XLT44PT3	\$125	—	—	√	—
	Transition Socket for 64L TQFP (PF Package)	XLT64PT3 or XLT64PT4	\$125	—	—	√	—
	Transition Socket for 64L TQFP (PT Package)	XLT64PT2 or XLT64PT5	\$125	—	—	√	—
	Transition Socket for 80L TQFP (PF Package)	XLT80PT2	\$125	—	—	√	—
	Transition Socket for 80L TQFP (PT Package)	XLT80PT or XLT80PT3	\$125	—	—	√	—
MPLAB® PRO MATE® II	Socket Module for 18L DIP/SOIC Devices	AC30F005	\$189	—	—	√	—
	Socket Module for 28L DIP/SOIC Devices	AC30F004	\$189	—	—	√	—
	Socket Module for 40L DIP Devices	AC30F003	\$159	—	—	√	—
	Socket Module for 44L TQFP Devices	AC30F006	\$159	—	—	√	—
	Socket Module for 64L TQFP Devices (PF Package)	AC30F002	\$159	—	—	√	—
	Socket Module for 64L TQFP Devices (PT Package)	AC30F008	\$159	—	—	√	—
	Socket Module for 80L TQFP Devices (PF Package)	AC30F001	\$159	—	—	√	—
	Socket Module for 80L TQFP Devices (PT Package)	AC30F007	\$159	—	—	√	—
MPLAB® PM3	Full Featured Device Programmer, Base Unit	DV007004	\$895	√	√	√	√
	Socket Module for 18L/28L/40L DIP Devices	AC164301	\$189	√	√	√	√
	Socket Module for 16L (.150)/28L (.300) SOIC Devices	AC164302	\$189	√	√	√	√
	Socket Module for 28L ML Devices	AC164322	\$189	√	√	√	√
	Socket Module for 44L ML Devices	AC164322	\$189	√	√	√	√
	Socket Module for 44L TQFP Devices	AC164305	\$189	√	√	√	√
	Socket Module for 64L TQFP Devices (PF Package)	AC164313	\$189	—	—	√	—
	Socket Module for 64L TQFP Devices (PT Package)	AC164319	\$189	√	√	√	√
	Socket Module for 80L TQFP Devices (PF Package)	AC164314	\$189	—	—	√	—
	Socket Module for 80L TQFP Devices (PT Package)	AC164320	\$189	√	—	√	√

# Software Libraries and Application Development Tools

Development Tool	Description	Part#	List Price <sup>(1)</sup>	Devices Supported			
				PIC24F	PIC24H	dsPIC30F	dsPIC33F
dsPIC30F Math Library	Standard math and floating point library (ASM, C Wrapper)	SW300020	Free	√	√	√	√
dsPIC30F Peripheral Library	Peripheral initialization, control and utility routines (C)	SW300021	Free	√	√	√	√
dsPIC30F DSP Library	Essential DSP algorithm suite (Filters, FFT)	SW300022	Free	—	—	√	√
dsPICworks™	Data analysis and DSP software	SW300023	Free	√	√	√	√
Digital Filter Design	Full featured graphical IIR and FIR filter design package for dsPIC30F	SW300001	\$249	—	—	√	√
Digital Filter Design Lite	Graphical IIR and FIR filter design package for dsPIC30F	SW300001-LT	\$29	—	—	√	√
CMX-Tiny+™ for dsPIC® DSC	Preemptive Real-time Operating System (RTOS) for dsPIC30F (from CMX)	CMX-Tiny+ for dsPIC30F	Contact CMX	√	√	√	√
	Preemptive Real-time Operating System (RTOS) for dsPIC30F	SW300032	\$3000	√	√	√	√
CMX-RTX™ for dsPIC® DSC	Fully preemptive Real-time Operating System (RTOS) for dsPIC30F (from CMX)	CMX-RTX for dsPIC30F	Contact CMX	√	√	√	√
	Fully preemptive Real-time Operating System (RTOS) for dsPIC30F	SW300031	\$4000	√	√	√	√
CMX Scheduler™	Multi-tasking, preemptive scheduler for dsPIC30F	SW300030	Contact CMX	√	√	√	√
Symmetric Key Embedded Encryption Library	Security encryption software support for AES, triple-DES, SHA-1, RNG and MD5	SW300050 - 5K*	\$2500	—	—	√	√
	Evaluation copy of security encryption software support for AES, triple-DES, SHA-1, RNG and MD5	SW300050-EVAL	\$5	—	—	√	√
Asymmetric Key Embedded Encryption Library	Security encryption software support for RSA, DSA, Diffie-Hellman, SHA-1, RNG and MD5	SW300055 - 5K*	\$2500	—	—	√	√
	Evaluation copy of security encryption software support for RSA, DSA, Diffie-Hellman, SHA-1, RNG and MD5	SW300055-EVAL	\$5	—	—	√	√
Noise Suppression Library	Function to suppress noise interference in speech signals	SW300040 - 5K*	\$2500	—	—	√	√
	Evaluation copy of function to suppress noise interference in speech signals	SW300040-EVAL	\$5	—	—	√	√
Acoustic Echo Cancellation Library	Function to eliminate echo generated from a speaker to a microphone	SW300060 - 5K*	\$2500	—	—	√	√
	Evaluation copy of function to eliminate echo generated from a speaker to a microphone	SW300060-EVAL	\$5	—	—	√	√
Acoustic Accessory Kit	Accessory Kit (includes: audio cable, headset, oscillators, microphone, speaker, DB9 M/F RS-232 cable, DB9M-DB9M Null Modem Adapter)	AC300030	\$87.50	—	—	√	√
Line Echo Cancellation Library	Function to cancel electrical line echoes caused by 2- or 4-wire conversion hybrids	SW300080-5K	\$2500	—	—	√	√
	Function to cancel electrical line echoes caused by 2- or 4-wire conversion hybrids	SW300080-EVAL	\$5	—	—	√	√
TCP/IP Library	TCP/IP connectivity and protocol support	CMX-for dsPIC30F	Contact CMX	—	—	√	√
	TCP/IP connectivity and protocol support	SW300024	Free	√	√	√	√
Soft Modem Library	V.22bis/V.22 Soft Modem Library	SW300002	Free	—	—	√	√
	V.32bis Soft Modem Library	SW300003*	\$2500	—	—	√	√
	Evaluation copy of V.32bis Soft Modem Library	SW300003-EVAL	\$5	—	—	√	√
	V.32 (non-trellis) Soft Modem Library		Contact Vocal	—	—	√	√
Speech Recognition System	Automatic speech recognition system including a PC-based speech training sub-system and a speech recognizer software library (16:1 compression)	SW300010 - 5K*	\$2500	—	—	√	√
	Evaluation copy of automatic speech recognition system including a PC-based speech training sub-system and a speech recognizer software library (16:1 compression)	SW300010-EVAL	\$5	—	—	√	√
SPEEX Speech Encoding/Decoding Library	Speech library to perform speech compression and decompression	SW300070 - 5K*	\$2500	—	—	√	√
	Evaluation copy of speech library to perform speech compression and decompression	SW300070-EVAL	\$5	—	—	√	√
G.711 Speech Encoding/Decoding Library	APCM speech compression and decompression (2:1 compression)		Contact Microchip	√	√	√	√
G.726A Speech Encoding/Decoding Library	Speech compression and decompression (8:1 compression)		Contact Microchips	—	—	√	√
CANbedded for dsPIC® DSC	CAN driver library for dsPIC30F		Contact Vector	—	√	√	√
osCAN for dsPIC® DSC	OSEK/VDX v2.2		Contact Vector	—	√	√	√

<sup>(1)</sup> List price may change without notice; \* To license for production quantities greater than 5,000 pieces for a project's lifetime—contact Microchip.

# Documentation

Note that all the latest revisions of these documents are available from the Microchip web site.

Document Type	Document Title	Document Number
Overview Documents	dsPIC30F High Performance 16-bit Digital Signal Controller Family Overview	DS70043
	dsPIC33F High Performance 16-bit Digital Signal Controller Family Overview	DS70155
Data Sheets	PIC24FJ128GA Family Data Sheet	DS39747
	PIC24H Family Data Sheet	DS70175
	dsPIC33F Family Data Sheet	DS70165
	dsPIC30F2010 Data Sheet	DS70118
	dsPIC30F2011, dsPIC30F2012, dsPIC30F3012, dsPIC30F3013 Data Sheet	DS70139
	dsPIC30F3010, dsPIC30F3011 Data Sheet	DS70141
	dsPIC30F3014, dsPIC30F4013 Data Sheet	DS70138
	dsPIC30F4011, dsPIC30F4012 Data Sheet	DS70135
	dsPIC30F5011, dsPIC30F5013 Data Sheet	DS70116
	dsPIC30F5015, dsPIC30F5016 Data Sheet	DS70149
	dsPIC30F6010 Data Sheet	DS70119
	dsPIC30F6011, dsPIC30F6012, dsPIC30F6013, dsPIC30F6014 Data Sheet	DS70117
	dsPIC30F6011A, dsPIC30F6012A, dsPIC30F6013A, dsPIC30F6014A Data Sheet	DS70143
	dsPIC30F6010A, dsPIC30F6015 Data Sheet	DS70150
Reference Manuals	dsPIC30F Programmer's Reference Manual	DS70030
	dsPIC30F Language Tools Quick Reference Guide	DS51322
	dsPIC30F/33F Programmer's Reference Manual	DS70157
	dsPIC30F Family Reference Manual	DS70046
Application Notes	AN901 - Using the dsPIC30F for Sensorless BLDC Control	DS00901
	AN908 - Using the dsPIC30F for Vector Control of an AC Induction Motor	DS00908
	AN957 - Sensored BLDC Motor Control Using dsPIC30F2010	DS00957
	AN962 - Implementing Auto Baud on dsPIC30F Devices	DS00962
	AN984 - An Introduction to AC Induction Motor Control Using the dsPIC30F	DS00984
	AN992 - Sensorless BLDC Motor Control Using dsPIC30F2010	DS00992
	AN1017 - Sinusoidal Control of a PMSM Motor with the dsPIC30F DSC	DS01017
Technical CD	dsPIC30F Technical CD-ROM (contains all of the above)	DS70084

## Third Party Contact Information

Company	Phone	E-mail	Web Site
CMX Systems, Inc.	+1 904 880 1840	cmx@cmx.com	www.cmx.com
HI-TECH Software	+61 7 3552 777	hitech@htsoft.com	www.htsoft.com
IAR	+46 18 16 78 00	info@iar.se	www.iar.se
Vector Informatik GmbH	+49 711 80670 0	info@vector-informatik.com	www.vector-informatik.com
VOCAL Technologies, LTD	+1 716 688 4675	sales@vocal.com	www.vocal.com



## Support

Microchip is committed to supporting its customers in developing products faster and more efficiently. We maintain a worldwide network of field applications engineers and technical support ready to provide product and system assistance. In addition, you can access the following service areas at [www.microchip.com](http://www.microchip.com): the Support area provides a fast way to get questions answered; the Sample area offers free evaluation samples of any Microchip device; and, the Training area educates customers through webinars, sign-ups for local seminar and workshop courses, and information about the annual MASTERS events held throughout the world.

## Purchase



microchipDIRECT is a web-based purchasing site that gives you 24-hour-a-day access to all of our devices and tools, including pricing, ordering, inventory and support. You can buy the products you need on a very easily opened Microchip line of credit.

## Sales Office Listing

Technical Support: <http://support.microchip.com>

### AMERICAS

**Atlanta**  
Tel: 770-640-0034  
**Boston**  
Tel: 774-760-0087  
**Chicago**  
Tel: 630-285-0071  
**Dallas**  
Tel: 972-818-7423  
**Detroit**  
Tel: 248-538-2250  
**Kokomo**  
Tel: 765-864-8360  
**Los Angeles**  
Tel: 949-462-9523  
**San Jose**  
Tel: 650-215-1444  
**Toronto**  
Mississauga, Ontario  
Tel: 905-673-0699

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733  
**China - Beijing**  
Tel: 86-10-8528-2100  
**China - Chengdu**  
Tel: 86-28-8676-6200  
**China - Fuzhou**  
Tel: 86-591-8750-3506  
**China - Hong Kong SAR**  
Tel: 852-2401-1200  
**China - Qingdao**  
Tel: 86-532-8502-7355  
**China - Shanghai**  
Tel: 86-21-5407-5533  
**China - Shenyang**  
Tel: 86-24-2334-2829  
**China - Shenzhen**  
Tel: 86-755-8203-2660  
**China - Shunde**  
Tel: 86-757-2839-5507  
**China - Wuhan**  
Tel: 86-27-5980-5300  
**China - Xian**  
Tel: 86-29-8833-7250

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-2229-0061  
**India - New Delhi**  
Tel: 91-11-5160-8631  
**India - Pune**  
Tel: 91-20-2566-1512  
**Japan - Yokohama**  
Tel: 81-45-471-6166  
**Korea - Gumi**  
Tel: 82-54-473-4301  
**Korea - Seoul**  
Tel: 82-2-554-7200  
**Malaysia - Penang**  
Tel: 60-4-646-8870  
**Philippines - Manila**  
Tel: 63-2-634-9065  
**Singapore**  
Tel: 65-6334-8870  
**Taiwan - Hsin Chu**  
Tel: 886-3-572-9526  
**Taiwan - Kaohsiung**  
Tel: 886-7-536-4818  
**Taiwan - Taipei**  
Tel: 886-2-2500-6610  
**Thailand - Bangkok**  
Tel: 66-2-694-1351

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-399  
**Denmark - Copenhagen**  
Tel: 45-4450-2828  
**France - Paris**  
Tel: 33-1-69-53-63-20  
**Germany - Munich**  
Tel: 49-89-627-144-0  
**Italy - Milan**  
Tel: 39-0331-742611  
**Netherlands - Drunen**  
Tel: 31-416-690399  
**Spain - Madrid**  
Tel: 34-91-708-08-90  
**UK - Wokingham**  
Tel: 44-118-921-5869



**MICROCHIP**  
[www.microchip.com/16bit](http://www.microchip.com/16bit)

Microchip Technology Inc. • 2355 W. Chandler Blvd. • Chandler, AZ 85224-6199

**Microcontrollers • Digital Signal Controllers • Analog • Serial EEPROMs**

The Microchip name and logo, the Microchip logo, dsPIC, MPLAB, PIC, and PRO MATE are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. FilterLab is a registered trademark of Microchip Technology Incorporated in the U.S.A. dsPICDEM, dsPICDEM.net, dsPICworks, In-Circuit Serial Programming, ICSP, PICDEM, PICDEM.net and PICtail, REAL ICE are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies.

