


MPQ-PSoC

Four Port In-System Programmer for Cypress PSoC™

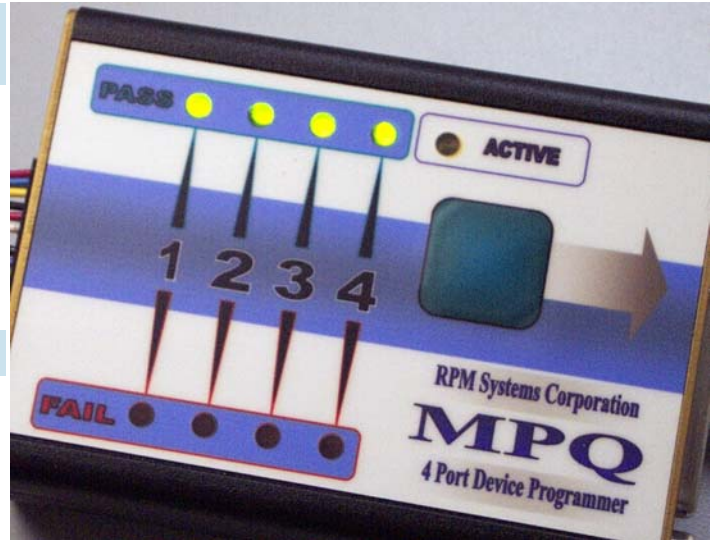

The MPQ-PSoC was the first product in RPM's family of dedicated in-system device programmers. Like all MPQ's, it is designed to be reliable, efficient, flexible and cost effective - all of the features you require in a manufacturing programmer.

Fast and Portable

Up to four different target images can be stored in the programmer's internal Flash memory, allowing faster programming times and standalone operation. In addition, our adaptive programming algorithm provides the fastest programming time for each image, while ensuring the image integrity of each device programmed.

Program Four Devices Simultaneously

Four port programming allows each MPQ to program the same image on up to four separate target devices simultaneously, increasing manufacturing throughput fourfold.

Stand-alone, ATE-Controlled or PC-Controlled

MPQ-PSoC can be operated stand-alone (just press a button to initiate programming), directly from a host PC using MPManger software, or under the control of your Automated Test Equipment (ATE) system.

Full Range of Voltage and Frequency Support

MPQ-PSoC is compatible with the full range of power supply voltages supported by Cypress PSoC devices, from 2.4 to 5.0V.

Rugged and Ready for Manufacturing World Wide

Features like an extruded aluminum chassis, universal power supply and extensive electrical protection ensure that MPQ-PSoC will be at home in any manufacturing environment.

Powerful Software - Field Upgradable

MPQ-PSoC comes complete with MPManger software to provide programmer configuration and image management, PC-controlled device programming, and more. MPManger also provides the ability to upgrade your MPQ-PSoC programmer on site as support for new devices is released by RPM.

Secure Image Management

Secure your programming images, preventing them from being read back from the programmer, and define a maximum number of parts to be programmed from each image. Send your MPQ to CM's anywhere in the world without worry.

NEW!

Autoserialization

MPQ-PSoC supports on-the-fly image modification, allowing each device to be programmed with a unique serial number, MAC address, IP address, etc.

MPQ-PSoC In-System Programmer

Full Memory Programming Speeds for Selected Devices

Verify Method	CY8C26233 (8 Kb)	CY8C27443 (16 Kb)
Program / Checksum Verify	4.4 Seconds	6.7 Seconds
Program / Read Verify	4.6 Seconds	7.5 Seconds

Reset mode programming, 5.0V Vcc. Times shown are typical times to erase, program and verify four devices using maximum size program images for each device.

Supported Devices

CY8C20224, CY8C20234, CY8C20334, CY8C20424, CY8C20434, CY8C20524, CY8C21123, CY8C21223, CY8C21323, CY8C21234, CY8C21334, CY8C21345, CY8C21434, CY8C21534, CY8C21634, CY8C22113, CY8C22045, CY8C22213, CY8C22345, CY8C22545, CY8C23033, CY8C23033, CY8C23433, CY8C23533, CY8C24033A, CY8C24094, CY8C24123, CY8C24123A, CY8C24223, CY8C24223A, CY8C24423, CY8C24423A, CY8C24533A, CY8C24633A, CY8C24794, CY8C24894, CY8C24994, CY8C25122, CY8C26233, CY8C26443, CY8C26643, CY8C27143, CY8C27243, CY8C27443, CY8C27543, CY8C27643, CY8C290001, CY8C29466, CY8C29566, CY8C29666, CY8C29866, CY8C21001, CY8C21002, CY8C24000, CY8C24000A, CY8C27002, CY8CLED04-68, CY8CLED16-28, CY8CLED16-48, CY8CLED08-OCD, CY8CNP102B, CY8CNP102E

Specifications

Target Voltage Range:	2.40 to 5.0VDC
Target Frequency Range :	<not applicable>
Power Supply:	100 to 240VAC, 50/60Hz **
Operating Temperature Range:	0°C to +65°C

Software Support

RPM Systems *MPManager* Software

- Programmer Image Management
- Programmer Configuration
- PC-Controlled Programming
- Windows™ 98, NT, 2000, XP



Buy online at [DigiKey.com](http://www.digikey.com)

** MPQ-PS Power Supply included with MPQ-PSoC

MPQ Programmers are also available for these popular microcontroller families:

- Atmel AVR
- Atmel AVR32
- Cypress enCoRe II
- Silicon Labs C8051F series
- Zilog Z8 Encore!
- Zilog ZNeo