


Socket pins for .055" Diameter Holes

R31, R52, R53

3A Current Rating, All accept .015" to .025" diameter leads

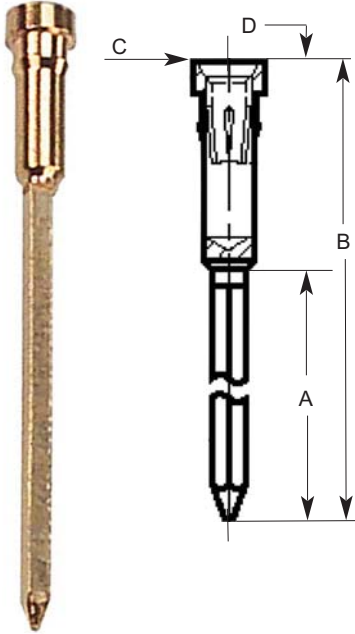

R31

- R31**
 - Three level wire wrap pins, .025" sq. posts
 - Four-finger contacts, tapered socket for easy insertion
 - Gold-plated contact surfaces
- R52**
 - Two level wire wrap pins, .025" sq. posts
 - Tin-plated contact surfaces
- R53**
 - Three level wire-wrap pins, .025" sq. posts
 - Six-finger contacts. low insertion force sockets
 - Gold-plated contact surfaces



Part No.	Pkg Qty	A	B	C	D	Male Pin Depth
R31/C	100	.500"	.703"	.072"	-	.17
R52/C	100	.370"	.570"	.072"	.031"	.15-.22"
R52/M	1000	.370"	.570"	.072"	.031"	.15-.22"
R53/C	100	.500"	.700"	.062"	-	-
R53/M	1000	.500"	.700"	.062"	-	-

T124 - Solder Washers

3 Sizes in Package



Multi-functional solder washer kits with three sizes of washers. Different sizes provided to fit over sockets and tails of most Vector socket pins and wiring terminals. Ideal tools for committing pins to voltage and ground planes in Vectorbord patterns, such as Voltage/Ground Plane and Vectorbord Plus™, that have clearance area isolating holes from planes.

T124/M (Includes 3 sizes)

Qty	I.D.	O.D.	Application
500	.078"	.110"	Vcc Side
500	.058"	.103"	GND Side
1000	.040"	.106"	Connector

T124-040/500


Qty	I.D.	O.D.	Application
500	.040"	.106"	Connector

R32

Socket Pins for .042" diameter holes



R32

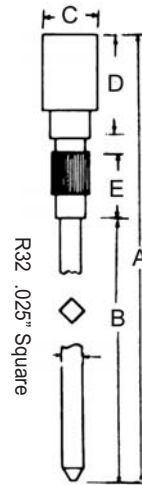

- Low profile wire-wrap socket pins
- Pressfit mounting
- Four-finger contacts, tapered sockets for easy insertion
- Accepts .015-.025 diameter leads
- Gold-plated contact surfaces

Use P158 Insertion Tool on Page 76
D9 Die Point

Part No.	Pkg Qty	A	B	C	D	E	Male Pin Depth
R32/C	100	.745"	.500"	.072"	.155"	.075"	.13"
R32/M	1000	.745"	.500"	.072"	.155"	.075"	.13"

Pins
Terminals

