


“P” Type Side Panel

Material: .08" aluminum, brushed and clear chromate finish

Part No.	Height A	Depth B	Handle Mounting Centers C	Rack Mounting Centers D	F	Accepts Card Height
SW52P89/90	5.25"	9.0"	4.25"	-	2.25"	4.5"
SW52P119/90	5.25"	12.0"	4.25"	-	2.25"	4.5"
SW52P156/90	5.25"	15.75"	4.25"	-	2.25"	4.5"
SW87P89/90	8.75"	9.0"	4.25"	5.75"	2.25"	8.0"
SW87P119/90	8.75"	12.0"	4.25"	5.75"	2.25"	8.0"
SW104P156/90	10.5"	15.75"	4.25"	7.5"	3.0"	9.75"

T-Struts
Part Mounting
Hardware



Metal or plastic screw down card guides attach with SC4-27/25 flat head screw and NT4-7PA square nut. Square nuts skide into T-strut slots and anchor 4-40 screws for mounting parts. Supplied in quantities of 25 ea.

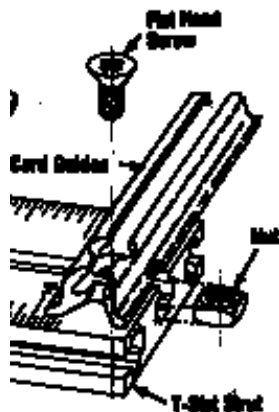

Part No.	Description	Size	Pkg Qty
NT4-7PA	Square nut	4-40	25
SC4-27/25	100o flat head screw	4-40 X 1/4"	25

Modules or
Front Panel
Mounting
Hardware

SC 10-2A Thumb screws and SC10-3A jack screws (supplied with EFP modules, Cardmount modules and front assemblies to T-struts. SP09-2 spacers are used as standoffs for mounting modules to 1" T-struts (1.79" struts are standard with module subracks.)

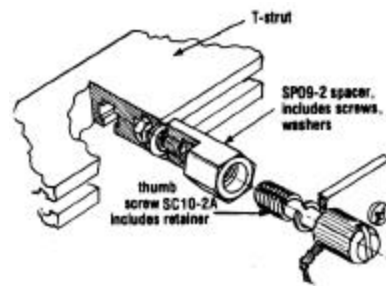

Part No.	Description	Pkg Qty
BR64#	Right angle bracket and two mounting screws	1
SP09-2	Hex spacer for module mounting, includes hardware	12
SC10-2A	Thumb screw fully threaded for direct attachment of panels	12
SC10-3A	Jack screw for mounting modules to T-struts with jacking action	12
HD34	Connector mounting hardware, includes SC4-28 screws, NT4-2# nuts and lockwashers	42ea.
HD52	4-40 nut for connector mounting	42ea.
SC4-28	4-40 hex head screws, 3/4" long, Lock washer 4-40 hex head screw, 1/2" long for connector mounting	24

Subracks