



NEW

PLUGBORD™

PRINTED CIRCUIT PROTOTYPING BOARDS FOR D-SUBMINATURE CONNECTORS

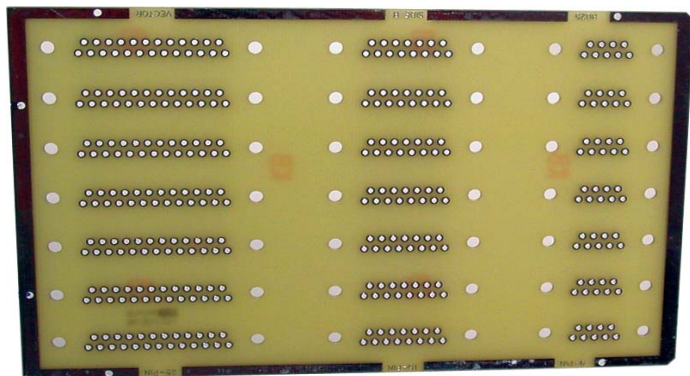

**Standard Density 25, 15, 9-Pin
8025**

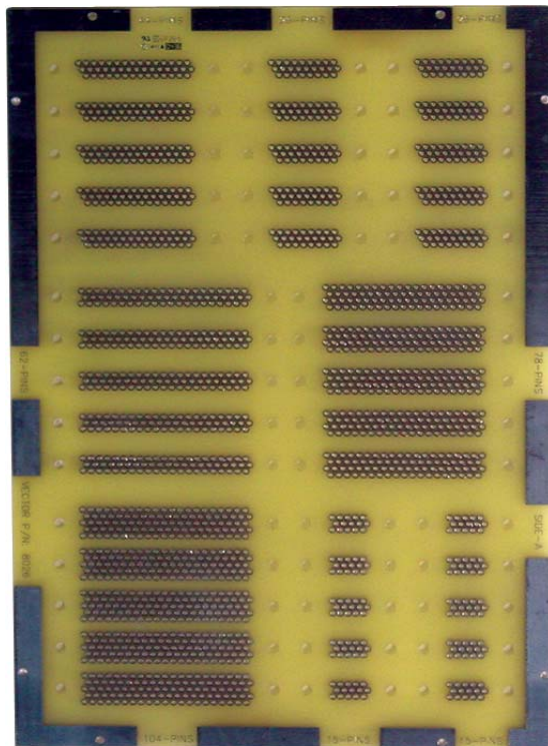

**High Density 15,26,44,62,78 & 104-Pin
8026**

Features:

- Standard or high density patterns
- Press-fit Pad-Per-Hole, Holes Plated-Thru
- All Copper Circuit Patterns are Solder Coated
- FR-4 Epoxy Glass UL 94V-) Flame Rating
- Boards Can Be Cut to Smaller Units

These .062" (1.57MM) Thick printed circuit boards feature SOLDER-COATED .039" (99MM) diameter holes. 3U and 6U Eurocard board dimensions will plug into VectorPak DIN-based subracks (ordered separately).

ORDERING INFORMATION:

Part Nr.	W X L	Circuit Pattern		Material
		Solder Side	Component Side	
8025	3.94" x 6.3"	Pads/Plated Holes	Pads/Plated Holes	FR-4
8026	9.19" x 6.3"	Pads/Plated Holes	Pads/Plated Holes	FR-4