
Wireless External Antenna for 2.4 GHz Application

Pulse Part Number: W1010



Features

- Shortest antennas in product line Omnidirectional radiation
- For WLAN devices using WiFi (802.11b/g), Bluetooth®, ZigBee[™] and other applications in the ISM 2.4GHz band
- Omnidirectional radiation pattern provides broad 360° coverage
- One-quarter wavelength dipole configuration
- Connection and color options easily integrate with OEM designs

Connector

- SMA (Male)

Weight 6.3 grams Carton 20/bag; 500/carton

Dimensions: Inches mm

Unless otherwise specified, all tolerances are $\pm \frac{0.10}{0.25}$

Electrical Specifications @ +25 °C

Note: This part number is lead-free and RoHS compliant. No additional suffix or identifier is required.

Frequency [GHz]	Gain [dBi]	Impedance [Nom]	VSWR	Polarization	Electrical Length	Radiation
2.4 – 2.5	2.0	50 Ω	≤ 2.0	Vertical	1⁄4, dipole	Omni

Pulse Finland Oy Takatie 6 90440 Kempele, Finland Tel: +358 207 935 500 Fax: +358 207 935 501 www.pulseeng.com/antennas



© 2008. All Rights Reserved


Wireless External Antenna for 2.4 GHz Application

Pulse Part Number: W1010


Application Notes

Omni-directional antennas provide a uniform, donutshaped, 360° radiation pattern. The omni-directional pattern is suitable for point-to-multipoint broadcasting in all directions. This antenna is primarily used for WLAN applications. However, it can also be used for a variety of other applications withing the spec ified frequency range. When used as an access point, the antenna is ideally located at the center of the coverage area.

Gain Performance W1010

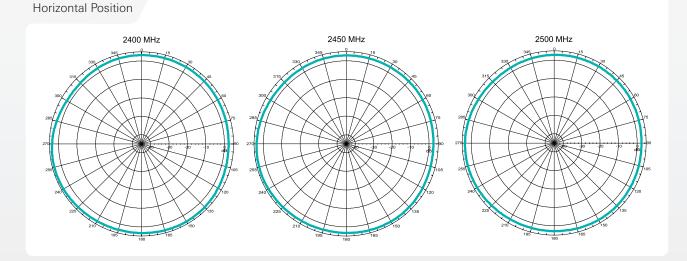

Vertical Position

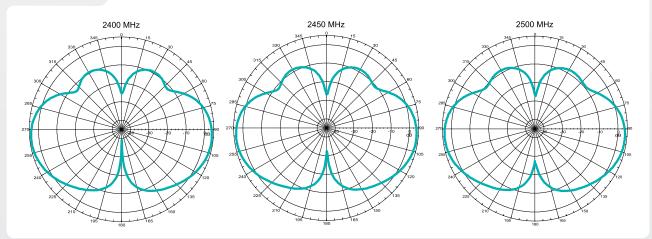

Pulse Finland Oy Takatie 6 90440 Kempele, Finland Tel: +358 207 935 500 Fax: +358 207 935 501 www.pulseeng.com/antennas



© 2008. All Rights Reserved