


Product Dimensions

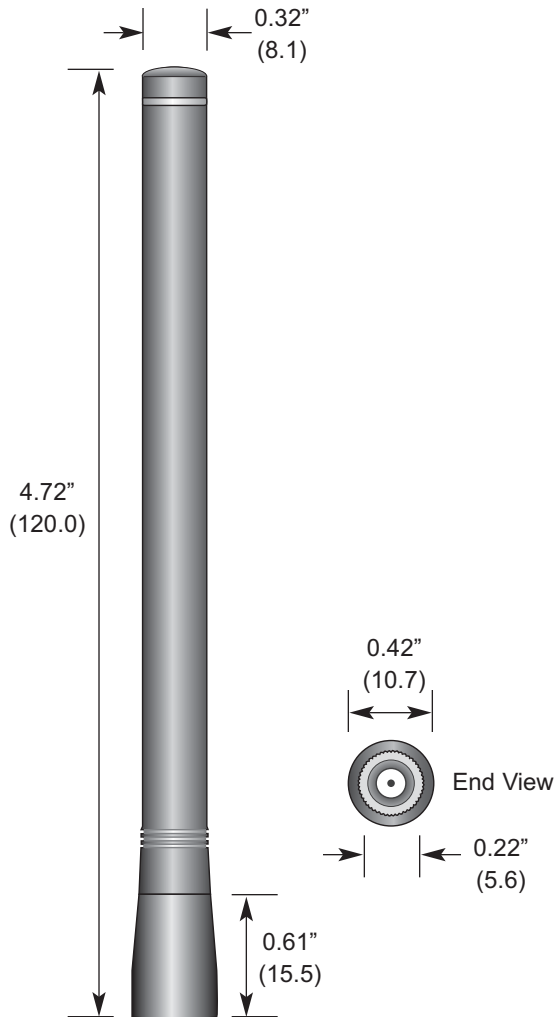

Description

HW Series antennas deliver outstanding performance in a rugged and cosmetically attractive package. The 315, 418, and 433MHz monopole versions have a 1/4-wave element. The 868, 916MHz and 1.4GHz dipole versions have a center-fed 1/2-wave element with an internal ground reference. The antennas attach via a standard SMA or Part 15 compliant RP-SMA connector. Custom colors and connectors are available for volume OEM customers.

Features

- Low cost
- Excellent performance
- Omni-directional pattern
- Outstanding VSWR
- Rugged & damage-resistant
- Part 15 compliant RP-SMA connector
- Custom colors and terminations for volume OEMs
- Use with plastic* or metal enclosures

* Requires proximity ground plane

Electrical Specifications


- Center Freq. 315MHz
- Bandwidth 15MHz
- Wavelength 1/4-wave
- VSWR <2.0 typ. at center
- Impedance 50 ohms
- Connector RP-SMA

Electrical specifications and plots measured on 4.00" x 4.00" reference ground plane

Ordering Information

- ANT-315-CW-HW

VSWR Graph

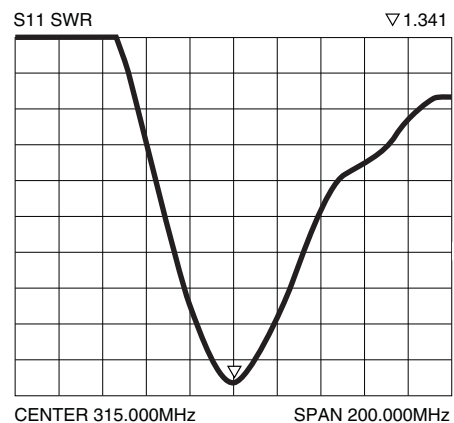

Typical VSWR