


Omron V750-BA50C04 Series

GEN 2

GLOBAL STANDARDS

EPC Generation 2 Interrogator Platform

Unmatched Readtime Performance

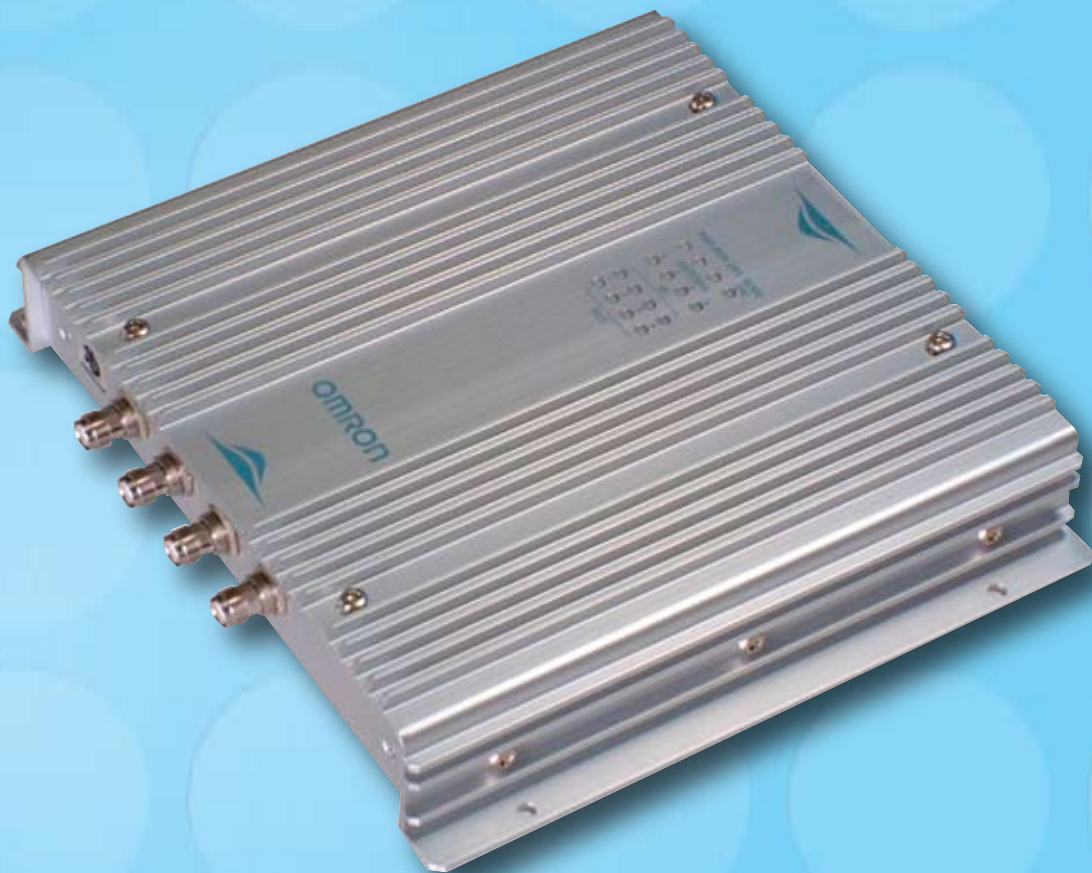

Omron V750-BA50C04 Series

UHF
READER/
WRITER

GEN 2



V750 BA50C04 Series platform enables high performance EPC Gen2 reading/writing and it features easy set up, advanced diagnostics, self execution RF environmental monitoring function. The reader delivers erase reliable and consistent performance.

Specifications		
Frequencies	V750-BA50C04-US	USA: 902.75 - 927.75MHz
	V750-BA50C04-EU	Europe: 856.6 - 867.6 MHz
	V750-BA50C04-JP	Japan: 952 - 954MHz
Supported Protocol	EPC Class1 Generation2	
Number of Antenna Port	Mono-Static (Transmit- Receipt- Integral) X 4 Ports	
Operating Tempurture	-10° to +50°	
Protective Rating	IP50 (IEC 60529)	
Power Supply Method	Exclusive AC Adapter	
Dimensions	246X215X43.5mm (9.68X8.5X1.7 inch)	
Interface Port	Ethernet, RS232C	
I/O Interface	4 Inputs and 4 Outputs	
Filtering	2 Filters can be used without programing	
LED Display	Operation Status X 8 Displays, Input/Output Status X 8 Display	
Function Expandability	Software Upgradable, Control Port to Expand Functions	

Omron RFID Division

JAPAN

1-11-1 Osaki,
Gate City Osaki West 14F
Shinagawa-ku,
Tokyo 141-0032 Japan
Phone: +81-3-5435-2016
Fax: +81-3-5435-2017

NORTH AMERICA

1920 Thoreau Drive
Suite 165
Schaumburg, IL 60173 USA
Phone: 888-303-RFID (7343)
Fax: 847-925-1260

EUROPE

Wegalaan 57
2132 JD Hoofddorp
The Netherlands
Phone: +31-235681200
Fax: +31-235681222

CHINA

Rm. 302, AZIA Center,
1233 Lujiazui Ring Road
Pudong New Area, Shanghai
200120, PRC.
Phone: +86-21-5888-1666
Fax: +86-21-5888-7633/7933