

REV. 1 10/24/96

COIL: 26.5 VDC

WINDING #1
 1000 OHMS ± 10% @ 25° C
 13.0 VDC MUST OPERATE

WINDING #2
 1000 OHMS ± 10% @ 25° C
 13.0 VDC MUST OPERATE

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 30 g's


SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OTHER SPECIFICATIONS IN ACCORDANCE
WITH MIL-R-39016/45

CUSTOMER DATA SHEET

LAST ENERG.

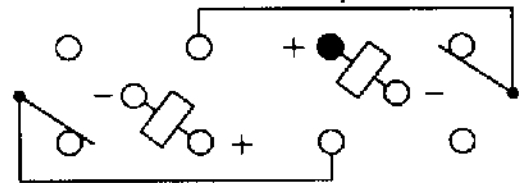

CONTACT RATING: 2 AMPS 30 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 3/9/95 CK 10/24/96 RB



CUST. COMMERCIAL EQUIV.
 CUST. NO. M39016/45-020M

TYPE "LS" RELAY

LS-9520M